



netTerrain 9.9

SOAP API Programming Guide



Contents

1 About this guide	26
1.1 Who should use it	26
1.2 SOAP vs REST API	26
1.3 Assumptions	27
1.4 Guide format	27
2 SOAP API Basics	27
2.1 Setting up access to the API	28
2.1.1 WCF Service and endpoint address	30
2.1.2 Behavior	31
2.1.3 Binding	32
2.2 Checking API accessibility	32
2.3 Using the API	33
2.3.1 Creating a test console application	34
2.3.2 Adding the connection factory	38
2.3.3 Creating and testing the web service connection	40
2.4 Setting up your Web API with no SSL protection	42
2.4.1 Configuring the web.config file for unprotected access	42
2.4.2 Configuring the client application for unprotected access	43
2.5 Custom Modules	44
2.5.1 Setting up Named Pipes support	45
2.5.2 Creating a sample extension module	47
2.5.2.1 Opening the solution	47
2.5.2.2 Configuring the Web API service reference	48
2.5.2.3 Exploring the Methods Class	49
2.5.2.4 Method responses	51
2.5.2.5 Running Web API methods in the extension module	54
2.5.2.6 Using parameters	55
2.5.2.7 Testing extension module methods	56
2.5.2.8 Integrating the extension module into netTerrain	57
2.5.3 Using the extension module from the netTerrain GUI	59
2.5.3.1 Setting up a double-click custom action	59
2.5.3.2 Setting up a custom action	60
2.5.3.3 Setting up a trigger	62
2.5.4 Using parameters	64

3 Main API Classes	67
3.1 NetTerrain.WebApi Namespace	67
3.1.1 Classes	67
3.1.2 Interfaces	68
3.1.3 Enumerations	68
3.2 ArrowStyles Enumeration	69
3.2.1 Syntax	69
3.2.2 Members	69
3.2.3 See Also	70
3.3 DoubleClickBehaviors Enumeration	70
3.3.1 Syntax	70
3.3.2 Members	70
3.3.3 See Also	71
3.4 FaultInfo Class	71
3.4.1 Inheritance Hierarchy	71
3.4.2 Syntax	71
3.4.3 Constructors	71
3.4.4 Fields	72
3.4.5 See Also	72
3.5 FileUploadAttributes Class	72
3.5.1 Inheritance Hierarchy	72
3.5.2 Syntax	72
3.5.3 Constructors	72
3.5.4 Methods	73
3.5.5 Fields	73
3.5.6 See Also	73
3.6 FontFamilies Enumeration	73
3.6.1 Syntax	73
3.6.2 Members	74
3.6.3 See Also	74
3.7 Group Class	74
3.7.1 Inheritance Hierarchy	74
3.7.2 Syntax	75
3.7.3 Constructors	75
3.7.4 Fields	75
3.7.5 See Also	75
3.8 HierarchySearchModes Enumeration	75
3.8.1 Syntax	76
3.8.2 Members	76
3.8.3 See Also	76

4 API Reference	76
4.1 INetTerrainWebApi Interface	76
4.1.1 Syntax	76
4.1.2 Methods	77
4.1.3 See Also	83
4.2 AdminGroupAdd Method	83
4.2.1 Syntax	83
4.2.1.1 Parameters	84
4.2.1.2 Return Value	84
4.2.2 Exceptions	84
4.2.3 Examples	84
4.2.4 See Also	85
4.3 AdminGroupDelete Method	85
4.3.1 Syntax	85
4.3.1.1 Parameters	85
4.3.2 Exceptions	85
4.3.3 Remarks	85
4.3.4 Examples	86
4.3.5 See Also	86
4.4 AdminGroupGet Method	86
4.4.1 Syntax	86
4.4.1.1 Parameters	87
4.4.1.2 Return Value	87
4.4.2 Exceptions	87
4.4.3 Examples	87
4.4.4 See Also	87
4.5 AdminGroupGetByName Method	88
4.5.1 Syntax	88
4.5.1.1 Parameters	88
4.5.1.2 Return Value	88
4.5.2 Exceptions	88
4.5.3 Examples	88
4.5.4 See Also	89
4.6 AdminGroupUpdate Method	89
4.6.1 Syntax	89
4.6.1.1 Parameters	89
4.6.2 Exceptions	89
4.6.3 Remarks	90
4.6.4 Examples	90
4.6.5 See Also	90

4.7 AdminUserAdd Method	91
4.7.1 Syntax	91
4.7.1.1 Parameters	91
4.7.1.2 Return Value	92
4.7.2 Exceptions	92
4.7.3 Remarks	92
4.7.4 Examples	92
4.7.5 See Also	93
4.8 AdminUserDelete Method	93
4.8.1 Syntax	94
4.8.1.1 Parameters	94
4.8.2 Exceptions	94
4.8.3 Remarks	94
4.8.4 Examples	94
4.8.5 See Also	95
4.9 AdminUserGet Method	95
4.9.1 Syntax	95
4.9.1.1 Parameters	95
4.9.1.2 Return Value	95
4.9.2 Exceptions	96
4.9.3 Examples	96
4.9.4 See Also	96
4.10 AdminUserGetByName Method	96
4.10.1 Syntax	97
4.10.1.1 Parameters	97
4.10.1.2 Return Value	97
4.10.2 Exceptions	97
4.10.3 Examples	97
4.10.4 See Also	98
4.11 AdminUserSetPassword Method	98
4.11.1 Syntax	98
4.11.1.1 Parameters	98
4.11.2 Exceptions	98
4.11.3 Remarks	99
4.11.4 Examples	99
4.11.5 See Also	99
4.12 AdminUserUpdate Method	99
4.12.1 Syntax	99
4.12.1.1 Parameters	100
4.12.2 Exceptions	100

4.12.3 Remarks	100
4.12.4 Examples	100
4.12.5 See Also	101
4.13 CatalogAddLinkType Method	101
4.13.1 Syntax	101
4.13.1.1 Parameters	102
4.13.1.2 Return Value	102
4.13.2 Exceptions	102
4.13.3 Remarks	102
4.13.4 Examples	103
4.13.5 See Also	103
4.14 CatalogAddLinkTypeProperty Method	103
4.14.1 Syntax	103
4.14.1.1 Parameters	104
4.14.1.2 Return Value	104
4.14.2 Exceptions	104
4.14.3 Remarks	105
4.14.4 Examples	105
4.14.5 See Also	105
4.15 CatalogAddNodeType Method	105
4.15.1 Syntax	106
4.15.1.1 Parameters	106
4.15.2 Exceptions	106
4.15.3 Remarks	106
4.15.4 Examples	107
4.15.5 See Also	107
4.16 CatalogAddNodeTypeProperty Method	107
4.16.1 Syntax	108
4.16.1.1 Parameters	108
4.16.1.2 Return Value	109
4.16.2 Exceptions	109
4.16.3 Remarks	109
4.16.4 Examples	109
4.16.5 See Also	109
4.17 CatalogGetLinkTypeProperties Method	110
4.17.1 Syntax	110
4.17.1.1 Parameters	110
4.17.1.2 Return Value	110
4.17.2 Exceptions	110
4.17.3 Remarks	110

4.17.4 Examples	111
4.17.5 See Also	111
4.18 CatalogGetNodeTypeProperties Method	111
4.18.1 Syntax	112
4.18.1.1 Parameters	112
4.18.1.2 Return Value	112
4.18.2 Exceptions	112
4.18.3 Remarks	112
4.18.4 Examples	112
4.18.5 See Also	113
4.19 CatalogLinkCategoryAdd Method	113
4.19.1 Syntax	113
4.19.1.1 Parameters	114
4.19.1.2 Return Value	114
4.19.2 Exceptions	114
4.19.3 Remarks	114
4.19.4 Examples	115
4.19.5 See Also	115
4.20 CatalogLinkCategoryDelete Method	115
4.20.1 Syntax	116
4.20.1.1 Parameters	116
4.20.1.2 Exceptions	116
4.20.1.3 Remarks	116
4.20.1.4 Examples	116
4.20.1.5 See Also	117
4.21 CatalogLinkCategoryGet Method	117
4.21.1 Syntax	117
4.21.1.1 Parameters	117
4.21.1.2 Return Value	117
4.21.1.3 Exceptions	118
4.21.1.4 Examples	118
4.21.1.5 See Also	118
4.22 CatalogLinkCategoryGetByName Method	118
4.22.1 Syntax	119
4.22.1.1 Parameters	119
4.22.1.2 Return Value	119
4.22.1.3 Exceptions	119
4.22.1.4 Examples	119
4.22.1.5 See Also	120
4.23 CatalogLinkCategoryUpdate Method	120

4.23.1 Syntax	120
4.23.1.1 Parameters	120
4.23.2 Exceptions	120
4.23.3 Remarks	121
4.23.4 Examples	121
4.23.5 See Also	122
4.24 CatalogLinkCategoryUploadImage Method	122
4.24.1 Syntax	122
4.24.1.1 Parameters	122
4.24.2 Exceptions	122
4.24.3 Examples	123
4.25 CatalogLinkOverrideAdd Method	123
4.25.1 Syntax	123
4.25.1.1 Parameters	124
4.25.1.2 Return Value	125
4.25.2 Exceptions	125
4.25.3 Examples	125
4.25.4 See Also	126
4.26 CatalogLinkOverrideAddListValue Method	126
4.26.1 Syntax	126
4.26.1.1 Parameters	126
4.26.1.2 Return Value	126
4.26.2 Exceptions	127
4.26.3 Remarks	127
4.26.4 Examples	127
4.26.5 See Also	127
4.27 CatalogLinkOverrideDelete Method	127
4.27.1 Syntax	128
4.27.1.1 Parameters	128
4.27.2 Exceptions	128
4.27.3 Remarks	128
4.27.4 Examples	128
4.27.5 See Also	129
4.28 CatalogLinkOverrideGet Method	129
4.28.1 Syntax	129
4.28.1.1 Parameters	129
4.28.1.2 Return Value	129
4.28.2 Exceptions	130
4.28.3 Examples	130
4.28.4 See Also	130

4.29 CatalogLinkOverrideGetByListValue Method	130
4.29.1 Syntax	131
4.29.1.1 Parameters	131
4.29.1.2 Return Value	131
4.29.2 Exceptions	131
4.29.3 Examples	131
4.30 CatalogLinkOverridesGetByPropertyId Method	132
4.30.1 Syntax	132
4.30.1.1 Parameters	132
4.30.1.2 Return Value	132
4.30.2 Exceptions	132
4.30.3 Examples	133
4.30.4 See Also	133
4.31 CatalogLinkOverridesGetByTypeld Method	133
4.31.1 Syntax	133
4.31.1.1 Parameters	134
4.31.1.2 Return Value	134
4.31.2 Exceptions	134
4.31.3 Examples	134
4.31.4 See Also	134
4.32 CatalogLinkOverrideUpdate Method	135
4.32.1 Syntax	135
4.32.1.1 Parameters	135
4.32.2 Exceptions	135
4.32.3 Remarks	135
4.32.4 Examples	136
4.32.5 See Also	136
4.33 CatalogLinkTypeAdd Method	136
4.33.1 Syntax	137
4.33.1.1 Parameters	137
4.33.1.2 Return Value	137
4.33.2 Exceptions	137
4.33.3 Examples	137
4.34 CatalogLinkTypeClone Method	138
4.34.1 Syntax	138
4.34.1.1 Parameters	138
4.34.1.2 Return Value	138
4.34.2 Exceptions	139
4.34.3 Remarks	139
4.34.4 Examples	139

4.34.5 See Also	139
4.35 CatalogLinkTypeDelete Method	139
4.35.1 Syntax	140
4.35.1.1 Parameters	140
4.35.1.2 Return Value	140
4.35.2 Exceptions	140
4.35.3 Remarks	140
4.35.4 Examples	140
4.35.5 See Also	141
4.36 CatalogLinkTypeGet Method	141
4.36.1 Syntax	141
4.36.1.1 Parameters	141
4.36.1.2 Return Value	141
4.36.2 Exceptions	142
4.36.3 Examples	142
4.36.4 See Also	142
4.37 CatalogLinkTypeGetByName Method	142
4.37.1 Syntax	143
4.37.1.1 Parameters	143
4.37.1.2 Return Value	143
4.37.2 Exceptions	143
4.37.3 Examples	143
4.37.4 See Also	144
4.38 CatalogLinkTypePropertyAdd Method	144
4.38.1 Syntax	144
4.38.1.1 Parameters	144
4.38.1.2 Return Value	145
4.38.2 Exceptions	145
4.38.3 Remarks	145
4.38.4 Examples	145
4.38.5 See Also	146
4.39 CatalogLinkTypePropertyDelete Method	146
4.39.1 Syntax	146
4.39.1.1 Parameters	146
4.39.1.2 Return Value	147
4.39.2 Exceptions	147
4.39.3 Remarks	147
4.39.4 Examples	147
4.40 CatalogLinkTypePropertyGet Method	147
4.40.1 Syntax	148
4.40.1.1 Parameters	148
4.40.1.2 Return Value	148

4.40.2 Exceptions	148
4.40.3 Examples	148
4.40.4 See Also	149
4.41 CatalogLinkTypePropertyGetByName Method	149
4.41.1 Syntax	149
4.41.1.1 Parameters	149
4.41.1.2 Return Value	149
4.41.2 Exceptions	150
4.41.3 Examples	150
4.42 CatalogLinkTypePropertyUpdate Method	150
4.42.1 Syntax	150
4.42.1.1 Parameters	151
4.42.2 Exceptions	151
4.42.3 Remarks	151
4.42.4 Examples	151
4.42.5 See Also	152
4.43 CatalogLinkTypeUpdate Method	152
4.43.1 Syntax	153
4.43.1.1 Parameters	153
4.43.2 Exceptions	153
4.43.3 Remarks	153
4.43.4 Examples	153
4.43.5 See Also	154
4.44 CatalogNodeCategoryAdd Method	154
4.44.1 Syntax	154
4.44.1.1 Parameters	155
4.44.1.2 Return Value	155
4.44.2 Exceptions	155
4.44.3 Remarks	156
4.44.4 Examples	156
4.44.5 See Also	156
4.45 CatalogNodeCategoryDelete Method	157
4.45.1 Syntax	157
4.45.1.1 Parameters	157
4.45.2 Exceptions	157
4.45.3 Remarks	157
4.45.4 Examples	157
4.45.5 See Also	158
4.46 CatalogNodeCategoryGet Method	158
4.46.1 Syntax	158

4.46.1.1 Parameters	158
4.46.1.2 Return Value	159
4.46.2 Exceptions	159
4.46.3 Examples	159
4.46.4 See Also	159
4.47 CatalogNodeCategoryGetByName Method	159
4.47.1 Syntax	160
4.47.1.1 Parameters	160
4.47.1.2 Return Value	160
4.47.2 Exceptions	160
4.47.3 Examples	160
4.47.4 See Also	161
4.48 CatalogNodeCategoryUpdate Method	161
4.48.1 Syntax	161
4.48.1.1 Parameters	161
4.48.2 Exceptions	161
4.48.3 Remarks	162
4.48.4 Examples	162
4.48.5 See Also	163
4.49 CatalogNodeCategoryUploadImage Method	163
4.49.1 Syntax	163
4.49.1.1 Parameters	163
4.49.2 Exceptions	163
4.49.3 Examples	164
4.50 CatalogNodeOverrideAdd Method	164
4.50.1 Syntax	164
4.50.1.1 Parameters	165
4.50.1.2 Return Value	165
4.50.2 Exceptions	165
4.50.3 Remarks	166
4.50.4 Examples	166
4.50.5 See Also	166
4.51 CatalogNodeOverrideAddListValue Method	167
4.51.1 Syntax	167
4.51.1.1 Parameters	167
4.51.1.2 Return Value	167
4.51.2 Exceptions	167
4.51.3 Remarks	168
4.51.4 Examples	168
4.51.5 See Also	168

4.52 CatalogNodeOverrideDelete Method	168
4.52.1 Syntax	169
4.52.1.1 Parameters	169
4.52.2 Exceptions	169
4.52.3 Remarks	169
4.52.4 Examples	169
4.52.5 See Also	170
4.53 CatalogNodeOverrideGet Method	170
4.53.1 Syntax	170
4.53.1.1 Parameters	170
4.53.1.2 Return Value	170
4.53.2 Exceptions	170
4.53.3 Examples	171
4.53.4 See Also	171
4.54 CatalogNodeOverrideGetByListValue Method	171
4.54.1 Syntax	171
4.54.1.1 Parameters	172
4.54.1.2 Return Value	172
4.54.2 Exceptions	172
4.54.3 Examples	172
4.55 CatalogNodeOverridesGetByPropertyId Method	173
4.55.1 Syntax	173
4.55.1.1 Parameters	173
4.55.1.2 Return Value	173
4.55.2 Exceptions	173
4.55.3 Examples	173
4.55.4 See Also	174
4.56 CatalogNodeOverridesGetByTypeId Method	174
4.56.1 Syntax	174
4.56.1.1 Parameters	174
4.56.1.2 Return Value	174
4.56.2 Exceptions	175
4.56.3 Examples	175
4.56.4 See Also	175
4.57 CatalogNodeOverrideUpdate Method	175
4.57.1 Syntax	176
4.57.1.1 Parameters	176
4.57.2 Exceptions	176
4.57.3 Remarks	176
4.57.4 Examples	177

4.57.5 See Also	177
4.58 CatalogNodeOverrideUploadImage Method	177
4.58.1 Syntax	178
4.58.1.1 Parameters	178
4.58.2 Exceptions	178
4.58.3 Examples	178
4.59 CatalogNodeTypeAdd Method	179
4.59.1 Syntax	179
4.59.1.1 Parameters	179
4.59.1.2 Return Value	180
4.59.2 Exceptions	180
4.59.3 Remarks	180
4.59.4 Examples	180
4.59.5 See Also	181
4.60 CatalogNodeTypeClone Method	181
4.60.1 Syntax	181
4.60.1.1 Parameters	181
4.60.1.2 Return Value	182
4.60.2 Exceptions	182
4.60.3 Remarks	182
4.60.4 Examples	182
4.60.5 See Also	182
4.61 CatalogNodeTypeDelete Method	183
4.61.1 Syntax	183
4.61.1.1 Parameters	183
4.61.2 Exceptions	183
4.61.3 Remarks	183
4.61.4 Examples	183
4.61.5 See Also	184
4.62 CatalogNodeTypeGet Method	184
4.62.1 Syntax	184
4.62.1.1 Parameters	184
4.62.1.2 Return Value	185
4.62.2 Exceptions	185
4.62.3 Examples	185
4.62.4 See Also	185
4.63 CatalogNodeTypeGetByName Method	185
4.63.1 Syntax	186
4.63.1.1 Parameters	186
4.63.1.2 Return Value	186

4.63.2 Exceptions	186
4.63.3 Examples	186
4.63.4 See Also	187
4.64 CatalogNodeTypePropertyAdd Method	187
4.64.1 Syntax	187
4.64.1.1 Parameters	187
4.64.1.2 Return Value	188
4.64.2 Exceptions	188
4.64.3 Remarks	188
4.64.4 Examples	188
4.64.5 See Also	189
4.65 CatalogNodeTypePropertyDelete Method	189
4.65.1 Syntax	189
4.65.1.1 Parameters	189
4.65.2 Exceptions	189
4.65.3 Remarks	190
4.65.4 Examples	190
4.66 CatalogNodeTypePropertyGet Method	190
4.66.1 Syntax	190
4.66.1.1 Parameters	191
4.66.1.2 Return Value	191
4.66.2 Exceptions	191
4.66.3 Examples	191
4.66.4 See Also	191
4.67 CatalogNodeTypePropertyGetByName Method	192
4.67.1 Syntax	192
4.67.1.1 Parameters	192
4.67.1.2 Return Value	192
4.67.2 Exceptions	192
4.67.3 Examples	193
4.68 CatalogNodeTypePropertyUpdate Method	193
4.68.1 Syntax	193
4.68.1.1 Parameters	193
4.68.2 Exceptions	194
4.68.3 Remarks	194
4.68.4 Examples	194
4.68.5 See Also	195
4.69 CatalogNodeTypeUpdate Method	195
4.69.1 Syntax	196
4.69.1.1 Parameters	196

4.69.2 Exceptions	196
4.69.3 Remarks	196
4.69.4 Examples	197
4.69.5 See Also	198
4.70 CatalogNodeTypeUploadBackground Method	198
4.70.1 Syntax	198
4.70.1.1 Parameters	198
4.70.2 Exceptions	198
4.70.3 Remarks	199
4.70.4 Examples	199
4.70.5 See Also	199
4.71 CatalogNodeTypeUploadImage Method	200
4.71.1 Syntax	200
4.71.1.1 Parameters	200
4.71.2 Exceptions	200
4.71.3 Remarks	200
4.71.4 Examples	200
4.71.5 See Also	201
4.72 CatalogVendorAdd Method	201
4.72.1 Syntax	201
4.72.1.1 Parameters	202
4.72.1.2 Return Value	202
4.72.2 Exceptions	202
4.72.3 Examples	202
4.72.4 See Also	202
4.73 CatalogVendorDelete Method	203
4.73.1 Syntax	203
4.73.1.1 Parameters	203
4.73.2 Exceptions	203
4.73.3 Remarks	203
4.73.4 Examples	203
4.73.5 See Also	204
4.74 CatalogVendorGet Method	204
4.74.1 Syntax	204
4.74.1.1 Parameters	204
4.74.1.2 Return Value	205
4.74.2 Exceptions	205
4.74.3 Remarks	205
4.74.4 Examples	205
4.74.5 See Also	205

4.75 CatalogVendorGetByName Method	205
4.75.1 Syntax	206
4.75.1.1 Parameters	206
4.75.1.2 Return Value	206
4.75.2 Exceptions	206
4.75.3 Examples	206
4.75.4 See Also	207
4.76 CatalogVendorUpdate Method	207
4.76.1 Syntax	207
4.76.1.1 Parameters	207
4.76.2 Exceptions	207
4.76.3 Remarks	208
4.76.4 Examples	208
4.76.5 See Also	208
4.77 DiagramGetHeight Method	208
4.77.1 Syntax	209
4.77.1.1 Parameters	209
4.77.1.2 Return Value	209
4.77.2 Exceptions	209
4.77.3 Examples	209
4.77.4 See Also	210
4.78 DiagramGetLinksByTypeld Method	210
4.78.1 Syntax	210
4.78.1.1 Parameters	210
4.78.1.2 Return Value	211
4.78.2 Exceptions	211
4.78.3 Examples	211
4.78.4 See Also	212
4.79 DiagramGetMarginSize Method	212
4.79.1 Syntax	212
4.79.1.1 Parameters	212
4.79.1.2 Return Value	212
4.79.2 Exceptions	212
4.79.3 Examples	213
4.79.4 See Also	213
4.80 DiagramGetNodesByTypeGroup Method	213
4.80.1 Syntax	213
4.80.1.1 Parameters	214
4.80.1.2 Return Value	214
4.80.2 Exceptions	214

4.80.3 Examples	214
4.80.4 See Also	215
4.81 DiagramGetNodesByTypeid Method	215
4.81.1 Syntax	215
4.81.1.1 Parameters	216
4.81.1.2 Return Value	216
4.81.2 Exceptions	216
4.81.3 Examples	216
4.81.4 See Also	217
4.82 DiagramGetWidth Method	217
4.82.1 Syntax	217
4.82.1.1 Parameters	217
4.82.1.2 Return Value	218
4.82.2 Exceptions	218
4.82.3 Examples	218
4.82.4 See Also	218
4.83 InstanceMoveToFront Method	218
4.83.1 Syntax	219
4.83.1.1 Parameters	219
4.83.2 Exceptions	219
4.83.3 Remarks	219
4.83.4 Examples	220
4.84 InstanceSendToBack Method	220
4.84.1 Syntax	220
4.84.1.1 Parameters	220
4.84.2 Exceptions	221
4.84.3 Remarks	221
4.84.4 Examples	221
4.85 LinkDelete Method	221
4.85.1 Syntax	222
4.85.1.1 Parameters	222
4.85.2 Exceptions	222
4.85.3 Examples	222
4.85.4 See Also	222
4.86 LinkGetPropertyJsonValue Method	223
4.86.1 Syntax	223
4.86.1.1 Parameters	223
4.86.1.2 Return Value	223
4.86.2 Exceptions	223
4.86.3 Examples	224

4.87 LinkGetPropertyByName Method	224
4.87.1 Syntax	224
4.87.1.1 Parameters	224
4.87.1.2 Return Value	225
4.87.2 Exceptions	225
4.87.3 Examples	225
4.88 LinkGetTypeId Method	225
4.88.1 Syntax	226
4.88.1.1 Parameters	226
4.88.1.2 Return Value	226
4.88.2 Exceptions	226
4.88.3 Examples	226
4.88.4 See Also	227
4.89 LinkInsert Method	227
4.89.1 Syntax	227
4.89.1.1 Parameters	227
4.89.1.2 Return Value	228
4.89.2 Exceptions	228
4.89.3 Remarks	228
4.89.4 Examples	228
4.89.5 See Also	228
4.90 LinkPropertyUpdate Method	229
4.90.1 Syntax	229
4.90.1.1 Parameters	229
4.90.1.2 Exceptions	229
4.90.1.3 Examples	230
4.91 LinkTypeGetId Method	230
4.91.1 Syntax	230
4.91.1.1 Parameters	230
4.91.1.2 Return Value	231
4.91.1.3 Exceptions	231
4.91.1.4 Examples	231
4.91.1.5 See Also	231
4.92 NodeDelete Method	231
4.92.1 Syntax	232
4.92.1.1 Parameters	232
4.92.1.2 Exceptions	232
4.92.1.3 Examples	232
4.92.1.4 See Also	232
4.93 NodeGetPropertyByName Method	233

4.93.1 Syntax	233
4.93.1.1 Parameters	233
4.93.1.2 Return Value	233
4.93.2 Exceptions	233
4.93.3 Examples	234
4.94 NodeGetPropertyByName Method	234
4.94.1 Syntax	234
4.94.1.1 Parameters	234
4.94.1.2 Return Value	235
4.94.2 Exceptions	235
4.94.3 Examples	235
4.95 NodeGetTypeGroup Method	235
4.95.1 Syntax	236
4.95.1.1 Parameters	236
4.95.1.2 Return Value	236
4.95.2 Exceptions	236
4.95.3 Examples	236
4.95.4 See Also	237
4.96 NodeGetTypeId Method	237
4.96.1 Syntax	237
4.96.1.1 Parameters	237
4.96.1.2 Return Value	237
4.96.2 Exceptions	237
4.96.3 Examples	238
4.96.4 See Also	238
4.97 NodeInsert Method	238
4.97.1 Syntax	238
4.97.1.1 Parameters	239
4.97.1.2 Return Value	239
4.97.2 Exceptions	239
4.97.3 Examples	239
4.97.4 See Also	240
4.98 NodePropertyUpdate Method	240
4.98.1 Syntax	240
4.98.1.1 Parameters	240
4.98.2 Exceptions	241
4.98.3 Examples	241
4.99 NodeReparent Method	241
4.99.1 Syntax	241
4.99.1.1 Parameters	242

4.99.2 Exceptions	242
4.99.3 Examples	242
4.99.4 See Also	242
4.100 NodeSetCanMove Method	243
4.100.1 Syntax	243
4.100.1.1 Parameters	243
4.100.2 Exceptions	243
4.100.3 Remarks	243
4.100.4 Examples	244
4.101 NodeSetHeight Method	244
4.101.1 Syntax	244
4.101.1.1 Parameters	244
4.101.2 Exceptions	245
4.101.3 Remarks	245
4.101.4 Examples	245
4.102 NodeSetWidth Method	245
4.102.1 Syntax	246
4.102.1.1 Parameters	246
4.102.2 Exceptions	246
4.102.3 Remarks	246
4.102.4 Examples	246
4.103 NodeSetX Method	247
4.103.1 Syntax	247
4.103.1.1 Parameters	247
4.103.2 Exceptions	248
4.103.3 Remarks	248
4.103.4 Examples	248
4.103.5 See Also	248
4.104 NodeSetY Method	248
4.104.1 Syntax	249
4.104.1.1 Parameters	249
4.104.2 Exceptions	249
4.104.3 Remarks	249
4.104.4 Examples	250
4.104.5 See Also	250
4.105 NodesGetByName Method	250
4.105.1 Syntax	250
4.105.1.1 Parameters	251
4.105.1.2 Return Value	251
4.105.2 Exceptions	251

4.105.3 Remarks	251
4.105.4 Examples	251
4.105.5 See Also	251
4.106 NodeTypeGetId Method	252
4.106.1 Syntax	252
4.106.1.1 Parameters	252
4.106.1.2 Return Value	252
4.106.2 Exceptions	252
4.106.3 Examples	253
4.106.4 See Also	253
4.107 TestConnection Method	253
4.107.1 Syntax	253
4.107.2 Exceptions	254
4.107.3 Examples	254
4.107.4 See Also	254
4.108 VisNodeSetAttribute Method	254
4.108.1 Syntax	255
4.108.1.1 Parameters	255
4.108.2 Exceptions	255
4.108.3 Remarks	255
4.108.4 Examples	256
4.108.5 See Also	256
4.109 InstanceEffects Enumeration	256
4.109.1 Syntax	256
4.109.2 Members	257
4.109.3 See Also	257
4.110 LinkCategory Class	257
4.110.1 Inheritance Hierarchy	257
4.110.2 Syntax	257
4.110.3 Constructors	258
4.110.4 Fields	258
4.110.5 See Also	258
4.111 LinkOverride Class	258
4.111.1 Inheritance Hierarchy	258
4.111.2 Syntax	259
4.111.3 Constructors	259
4.111.4 Fields	259
4.111.5 See Also	260
4.112 LinkStyles Enumeration	260
4.112.1 Syntax	260

4.112.2 Members	260
4.112.3 See Also	260
4.113 LinkType Class	260
4.113.1 Inheritance Hierarchy	261
4.113.2 Syntax	261
4.113.3 Constructors	261
4.113.4 Fields	261
4.114 LinkTypeProperty Class	262
4.114.1 Inheritance Hierarchy	262
4.114.2 Syntax	262
4.114.3 Constructors	262
4.114.4 Fields	263
4.114.5 See Also	264
4.115 NewNodeTypeInfo Class	264
4.115.1 Inheritance Hierarchy	264
4.115.2 Syntax	264
4.115.3 Constructors	265
4.115.4 Methods	265
4.115.5 Fields	265
4.116 NodeCategory Class	265
4.116.1 Inheritance Hierarchy	266
4.116.2 Syntax	266
4.116.3 Constructors	266
4.116.4 Fields	266
4.116.5 See Also	266
4.117 NodeOverride Class	267
4.117.1 Inheritance Hierarchy	267
4.117.2 Syntax	267
4.117.3 Constructors	267
4.117.4 Fields	267
4.117.5 See Also	268
4.118 NodeType Class	268
4.118.1 Inheritance Hierarchy	268
4.118.2 Syntax	268
4.118.3 Constructors	268
4.118.4 Fields	269
4.118.5 See Also	270
4.119 NodeTypeGroups Enumeration	270
4.119.1 Syntax	270
4.119.2 Members	270

4.119.3 See Also	271
4.120 NodeTypeProperty Class	271
4.120.1 Inheritance Hierarchy	271
4.120.2 Syntax	271
4.120.3 Constructors	272
4.120.4 Fields	272
4.120.5 See Also	273
4.121 OverrideRules Enumeration	273
4.121.1 Syntax	273
4.121.2 Members	274
4.121.3 See Also	274
4.122 Roles Enumeration	274
4.122.1 Syntax	274
4.122.2 Members	274
4.122.3 See Also	275
4.123 TextAligns Enumeration	275
4.123.1 Syntax	275
4.123.2 Members	275
4.123.3 See Also	275
4.124 TextJustification Enumeration	275
4.124.1 Syntax	276
4.124.2 Members	276
4.124.3 See Also	276
4.125 UpwardsPropagations Enumeration	276
4.125.1 Syntax	276
4.125.2 Members	276
4.125.3 See Also	277
4.126 User Class	277
4.126.1 Inheritance Hierarchy	277
4.126.2 Syntax	277
4.126.3 Constructors	277
4.126.4 Fields	278
4.126.5 See Also	278
4.127 Vendor Class	278
4.127.1 Inheritance Hierarchy	278
4.127.2 Syntax	279
4.127.3 Constructors	279
4.127.4 Fields	279
4.127.5 See Also	279

Document Code. GN_D_n9-05 Last revision: 10/05/2024

© 2024 Graphical Networks LLC. All rights reserved (some wrongs still available).

Graphical Networks and netTerrain are registered trademarks of Graphical Networks LLC. Other product names mentioned in this manual may be trademarks or registered trademarks of their respective companies and are hereby acknowledged and stuff.

If rash, irritation, redness, or swelling develops, discontinue reading. Safety goggles may be required during use. Do not eat this guide. This disclaimer is not intended as legal advice. For that, better call Saul.

Image: Lake in Finland.

Graphical Networks LLC
Telephone: +1-240-912-6223
Fax: +1-240 something something

1 About this guide

1.1 Who should use it

This guide is for all those software developers out there that can't wait to create integrations with netTerrain. It's also dedicated to those netTerrain power users that want to add their special foo and are too anxious to wait for that pet feature in the roadmap. Yes, you can create your own custom menus in netTerrain and train them to do a bunch of things.

Users of the API are typically programmers familiar with C# (or Java or Python or whatever you get your hands on that can connect to WCF). If you are not familiar with any of these vastly superior OO languages and all you did was write some spaghetti PHP scripts or hack some SQL you are still welcome, we forgive you. Plenty of examples are provided throughout the guide to help you along the way.

Now go turn those cups of coffee into lines of code.

1.2 SOAP vs REST API

This is our SOAP Programming guide. We also have a super robust REST API. There are a few instances where the SOAP API is a better choice:

- 1) you need to create a custom dll that you want to launch from netTerrain as a node double-click
- 2) You want to create an event trigger (such as an on-property change trigger) that is executed on the server when a property value for a given node changes
- 3) You want to create a custom action using the context menu

The three instances mentioned above are examples where you probably want to use the netTerrain SOAP API to interact with netTerrain. In section 2.5 we'll go over these three examples. In most other cases you are probably better off using the REST API. To use the REST API simply refer to the Swagger documentation directly available online on the help ribbon of your netTerrain application.

1.3 Assumptions

The Web API description guide assumes you have a good understanding of the following concepts:

- netTerrain (that thing that Graphical Networks makes)
- The difference between an instance and a type (in netTerrain terms). Ok, in netTerrain a type is defined in the catalog (chair), and an instance is a manifestation of that type in the project (the second chair on the left, in the blue conference room). It is akin to class vs instantiation of that class in OO programming. Now you know.
- Node and link properties and their values
- Object oriented programming languages (using C# for example)

1.4 Guide format

Throughout the guide, we use C# as our reference language. This does not mean that the netTerrain API is language specific. You can write external applications that interact with netTerrain using another programming language like Java. If your framework can reference a wsdl file and use SOAP envelopes to connect to WCF you are good. Consider that the methods for gaining access to the API, the syntax and examples may differ for other platforms or languages.

In the API reference guide, we review each method that is exposed through the API interface including the syntax, exceptions, remarks and an example.

For the method syntax we use C# as our reference language and review each input parameter associated with the method signature.

In the exceptions paragraph we specify the exception notation and condition for an exception to be raised.

In the remarks section we may review special aspects to consider, such as enumerations, default values, return values and so on.

Finally, every method includes one example, written in C#.

2 SOAP API Basics

The netTerrain Application Programming Interface (API) is based on the Microsoft Windows Communication Foundation (WCF) framework and it is implemented as a web-accessible SSL-protected WCF service.

Some use cases for the netTerrain API include:

- Inserting, updating or deleting objects in netTerrain from an external application
- Extracting information from netTerrain programmatically for reporting or analysis purposes
- Synchronizing netTerrain with other application data in real-time
- Creating your own special menus or custom double click behaviors

Users familiar with the netTerrain Integration Toolkit (ITK) and the netTerrain database may achieve similar results using the ITK or tapping into the netTerrain backend database. There are certain advantages to using the API though:

- It is asynchronous in nature: as opposed to the ITK, which polls data from a source in a synchronous fashion or upon manual triggering, you can push data asynchronously into netTerrain. This could be a better alternative for certain real-time applications, or to reduce the number of processes used to update data in netTerrain
- It is database structure independent: using the API for data extraction or reporting purposes is independent of any changes that happen to the netTerrain backend database structure.

This guide provides step-by-step instructions on how to set-up and use the netTerrain API with a deployed netTerrain instance (or better). It includes descriptions of all the API methods along with some examples.

All netTerrain API methods obey application layer business rules and work in the same way as the equivalent operations performed through the graphical user interface.

2.1 Setting up access to the API

To make the netTerrain API accessible to an external application it is necessary to first make some modifications to the web.config file.

Open the web.config file in a text editor and insert the following code inside the tag:

```
<system.serviceModel>
    <services>
        <service name="NetTerrain.WebApi.WebApiService">
            <endpoint address="" binding="wsHttpBinding"
bindingConfiguration="WebApiSecureBinding" behaviorConfiguration=""
contract="NetTerrain.WebApi.INetTerrainWebApi" />
            <endpoint address="mex" binding="mexHttpsBinding"
contract="IMetadataExchange" />
        </service>
    </services>
    <behaviors>
```

```

<serviceBehaviors>
    <behavior name="">
        <serviceMetadata httpGetEnabled="false"
httpsGetEnabled="true" />
        <serviceDebug includeExceptionDetailInFaults="true" />
        <serviceCredentials>
            <serviceCertificate
findValue="eng.graphicalnetworks.com"
storeLocation="LocalMachine" storeName="My"
x509FindType="FindBySubjectName" />
            <userNameAuthentication
userNapasswordValidationMode="MembershipProvider"
membershipProviderName="NetTerrainMembershipProvider" />
            <clientCertificate>
                <authentication
certificateValidationMode="None" />
            </clientCertificate>
        </serviceCredentials>
    </behavior>
</serviceBehaviors>
</behaviors>
<bindings>
    <wsHttpBinding>
        <binding name="WebApiSecureBinding">
            <security mode="TransportWithMessageCredential">
                <transport clientCredentialType="None"
proxyCredentialType="None" realm="" />
                <message clientCredentialType="UserName"
algorithmSuite="Default" />
            </security>
        </binding>
    </wsHttpBinding>
</bindings>
<serviceHostingEnvironment multipleSiteBindingsEnabled="true" />
</system.serviceModel>

```

We will briefly review some important aspects of the WCF service configuration tags in your web.config file, necessary for netTerrain to properly enable API access. Please refer to the Microsoft WCF guide for a more comprehensive description of these WCF service settings.

2.1.1 WCF Service and endpoint address

The netTerrain API is declared as a WCF service named NetTerrain.WebApi.Web ApiService. A client application uses this name to identify the service. Services are described in terms of endpoints.

```
<endpoint address=""  
binding="wsHttpBinding"  
bindingConfiguration="WebApiSecureBinding"  
behaviorConfiguration=""  
contract="NetTerrain.WebApi.INetTerrainWebApi"/>
```

The service endpoint describes how a client interacts with the service. The endpoint combines the address, binding and contract settings of a service. The table below provides more insights into how the WCF service is comprised.

Attribute Name	Value	Description
address		Specifies where to send messages for this endpoint. This setting may not be required as the API uses just one default endpoint.
binding	wsHttpBinding	Specifies how to send a message for this endpoint. wsHttpBinding is a protocol providing enough security for the purposes of the API.
bindingConfiguration	WebApiSecureBinding	A reference to the binding configuration in the bindings section (described later).
behaviorConfiguration		A reference to the behavior configuration in the behavior section. Usually no value needs to be provided as only one default behavior is used.
contract	NetTerrain.WebApi.INetTerrainWebApi	Specifies the content of messages for this endpoint. This is, in essence, a list of API methods.

Clients use a standard endpoint to receive service metadata. This endpoint also specifies the SSL security settings that will be used for the exchange metadata.

The Endpoint address tag is set up as follows:

```
<endpoint address="mex" binding="mexHttpsBinding"
           contract="IMetadataExchange">
```

2.1.2 Behavior

Let's review some of the behavior related tags in your WCF configuration. For starters, the serviceMetadata should be configured as follow:

```
<serviceMetadata httpGetEnabled="false" httpsGetEnabled="true"/>
```

This tag includes directives to prevent service metadata extraction by a client through the http protocol, and instead, enables the https protocol in order to operate in a similar secured environment as normal browser-based end users do.

Next, the serviceDebug tag provides a flag to obtain exception data in case of faults during the execution of a service method:

```
<serviceDebug includeExceptionDetailInFaults="true"/>
```

The service credentials section sets up the server certificate data for working through SSL. For security reasons, the API should only work with your netTerrain instance by means of a signed X509 certificate:

```
<serviceCertificate findValue="eng.graphicalnetworks.com"
                   storeLocation="LocalMachine"
                   storeName="My"
                   x509FindType="FindBySubjectName"/>
```

Notice the locator that describes where to find the certificate. In our example the certificate is searched by its name, such as "eng.graphicalnetworks.com".

As mentioned before, we want the API user to be authenticated in a similar way as through the regular browser interface. To achieve that, we use the `userNameAuthentication` tag, which sets up the mechanism by which credentials are passed. We highly recommend keeping this section the same was as shown below:

```
<userNameAuthentication  
    userNamePasswordValidationMode="MembershipProvider"  
    membershipProviderName="NetTerrainMembershipProvider"/>
```

Finally, the `clientCertificate` tag shown below disables the requirement for an installed certificate on the client machine. Otherwise, an API client would also need the certificate on their machine.

```
<clientCertificate>  
    <authentication certificateValidationMode="None"/>  
</clientCertificate>
```

2.1.3 Binding

A binding protocol is used by the service to control the client/server interaction. The Web API uses the so-called `wsHttpBinding` protocol for that purpose. The binding section contains just one configuration parameter (`WebApiSecureBinding`) and the main service endpoint refers to it. It specifies that the Web API user will need to send his `netTerrain` credentials to use the service. The credentials validation process occurs on every message transmission (essentially every method call) while the client/server interaction uses Transport Layer Security.

```
<security mode="TransportWithMessageCredential">  
    <transport clientCredentialType="None" proxyCredentialType="None"  
    realm="" />  
    <message clientCredentialType="UserName"  
    algorithmSuite="Default" />  
</security>
```

2.2 Checking API accessibility

Your `netTerrain` application includes a special file used by the API called `NetTerrainWebApi.svc`, which is located in the `WebApi` folder under the `netTerrain` installed path:

```
c:\(netTerrain path)\WebApi\NetTerrainWebApi.svc.
```


This file contains a @ServiceHost WCF directive intended to host the Web API service:

```
<%@ ServiceHost Language="C#" Debug="true"  
Service="NetTerrain.WebApi.WebApiService" %>
```

After the API settings are added to the web.config file you can proceed to access the NetTerrainWebApi.svc file from a web browser by its URL address, as we show in the example below:

```
https://(netTerrainURL)/WebApi/NetTerrainWebApi.svc
```

This will force the directive to run and if the service creation process was successful, the following dialog should appear:

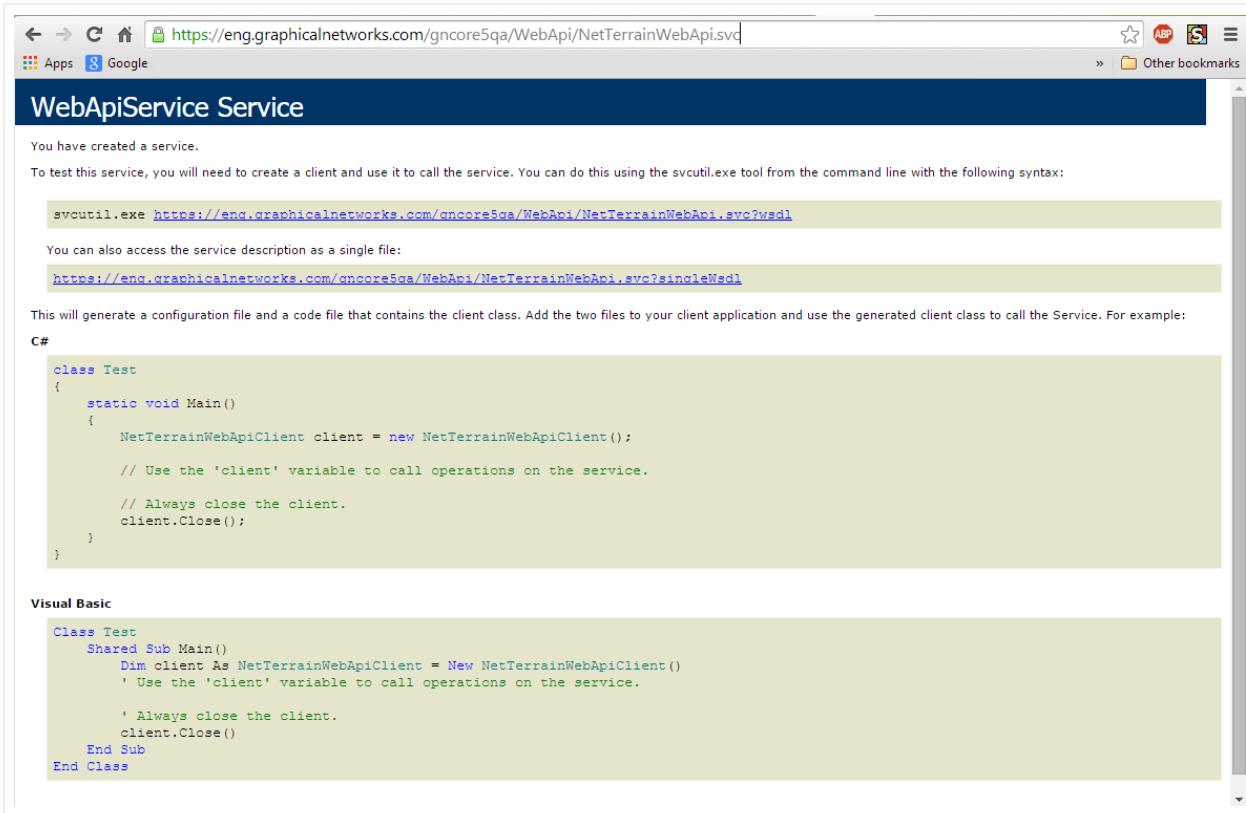

Next, the Web API service is created, and you should be able to start working with the netTerrain API.


2.3 Using the API

As mentioned before, the netTerrain API is not language specific. You can write external applications that interact with netTerrain using a language like Java. Take into account though, that the methods for gaining access to the API may differ for other platforms or languages.

In order to demonstrate a client-side application using the netTerrain Web API, a simple C# console application will be created using Microsoft Visual Studio 2012. It is recommended to install version 4.0 of the Microsoft .Net Framework on your client machine.


2.3.1 Creating a test console application

To start the creation of our simple test console application we first open Microsoft Visual Studio and create a Visual C# console application:

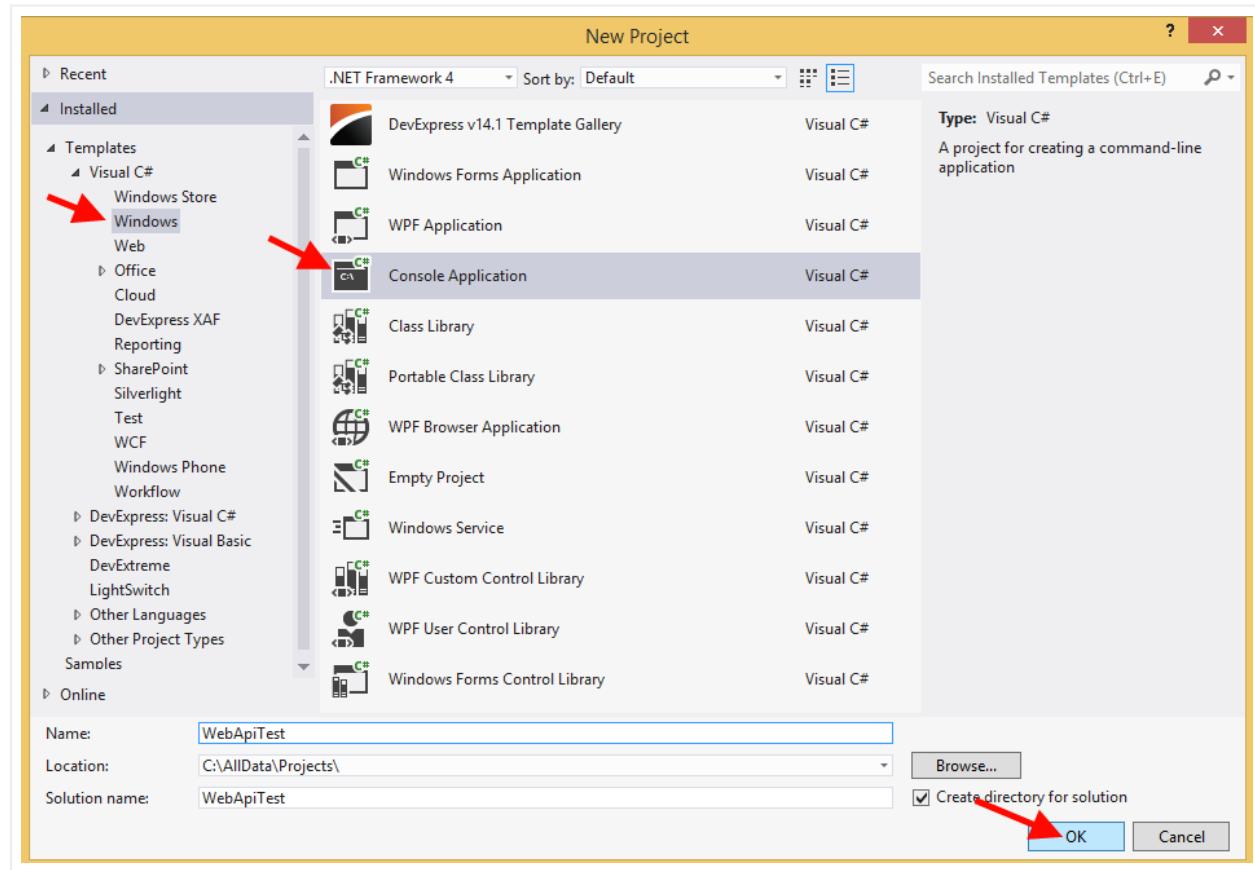


To make the Web API methods available by the application, a service reference should be added:


1. Select the 'Add Service Reference' menu item after right clicking on the References folder of your application:

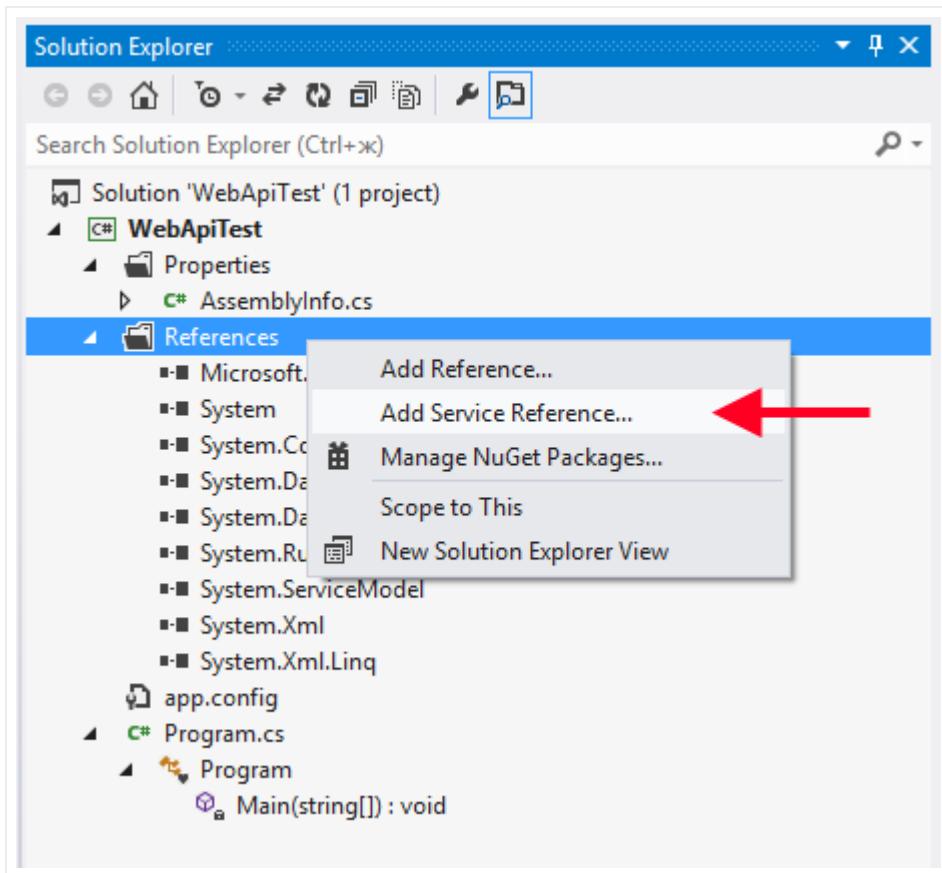

- 2) Type the full Web API URL address into the address field.
- 3) Click on 'Go'. If the Web ApiService service is accessible, it will appear in the window below.
- 4) Expand it to ensure it contains the INetTerrainWebApi interface and review the methods on the right.
- 5) Specify the service reference name you want to use in your application.
- 6) Click 'Ok'.

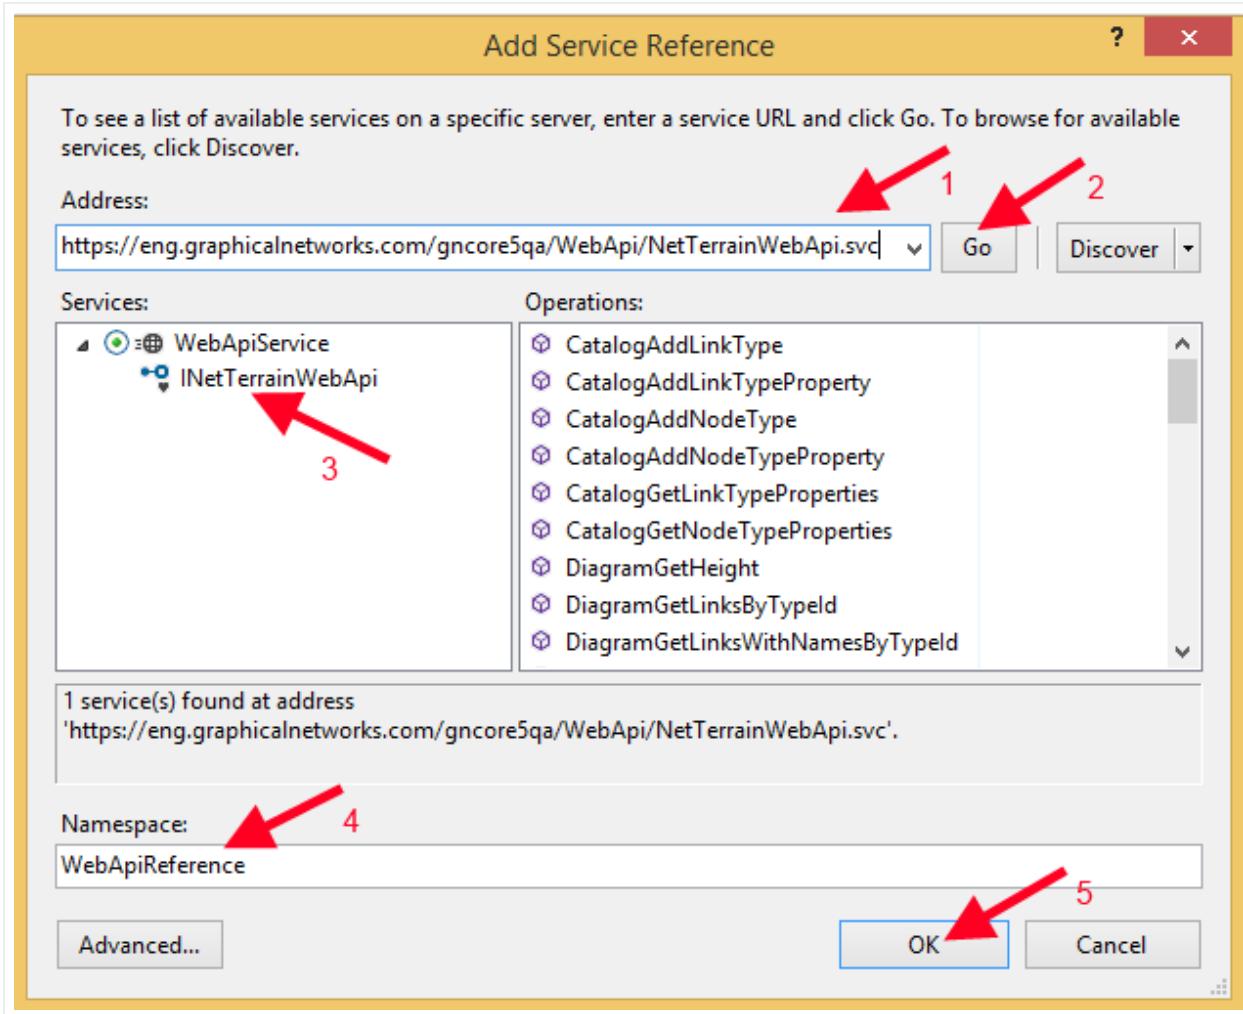

7) The reference to the Web API will appear in your Solution Explorer:

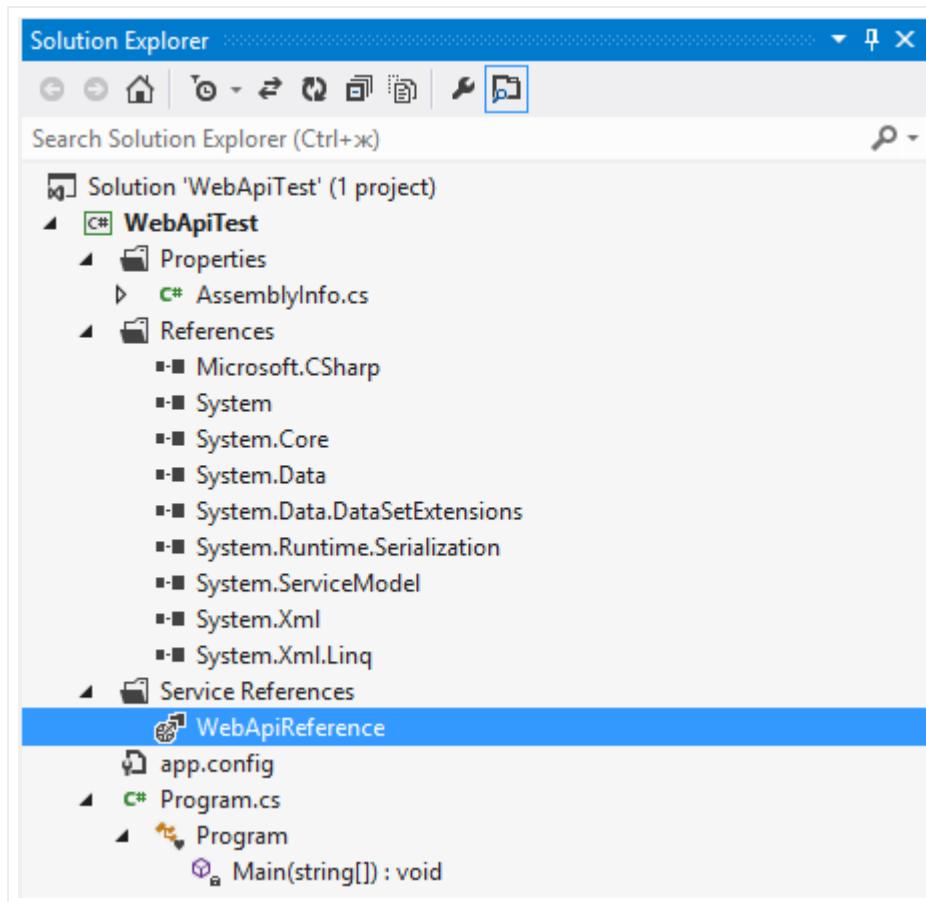

Visual Studio will create a WebApiReference folder and a set of files implementing the service interface to make its methods accessible from your code:

Name	Date modified	Type	Size
configuration.svcinfo	13-Nov-14 20:07	SVCINFO File	2 KB
configuration91.svcinfo	13-Nov-14 20:07	SVCINFO File	21 KB
NetTerrainWebApi.disco	13-Nov-14 20:07	DISCO File	1 KB
NetTerrainWebApi.xsd	13-Nov-14 20:07	XSD File	22 KB
NetTerrainWebApi1.xsd	13-Nov-14 20:07	XSD File	1 KB
NetTerrainWebApi2.xsd	13-Nov-14 20:07	XSD File	1 KB
NetTerrainWebApi3.xsd	13-Nov-14 20:07	XSD File	3 KB
NetTerrainWebApi4.xsd	13-Nov-14 20:07	XSD File	3 KB
C# Reference.cs	13-Nov-14 20:07	Visual C# Source f...	38 KB
Reference.svcmap	13-Nov-14 20:07	SVCMAP File	3 KB
Web ApiService.wsdl	13-Nov-14 20:07	WSDL File	72 KB

8) To ensure that the Web API interface is visible declare it in the program. At this stage the whole main program should look like this:

```
namespace WebApiTest
{
    class Program
    {
        static void Main(string[] args)
        {
            WebApiReference.INetTerrainWebApi connection = null;
        }
    }
}
```

Ensure that the WebApiReference namespace is visible and build the application. The code should compile without any errors.

2.3.2 Adding the connection factory

As a next step, and in preparation for some netTerrain specific code, we will add a private method in our Program class encapsulating the connection settings. In general, these settings merge the ones corresponding to the web.config file described previously.

As a rule of thumb, the method should work as if no settings in your web.config file were modified. To make the connection factory work correctly in terms of the credentials, add the following parameters:

Name	Type	Description
url	string	An address to the web service, which can point to another instance of netTerrain.
username	string	The netTerrain user name to obtain permissions. Currently all methods are exposed to any user, as such only admin type user connections are supported
password	string	

Let's take a closer look at our method source code:

```
private static ChannelFactory<WebApiReference.INetTerrainWebApi>
CreateConnectionFactory(
    string url, string username, string password)
```

```

{
    // 1\. Set up binding options: TransportWithMessageCredential
    mode:
        // Transport forces the use of the HTTPS protocol.
        // MessageCredential specifies that the WCF service will perform
        credentials validation on
        // every service method call.
        WSHttpBinding binding = new WSHttpBinding();
        binding.Security.Mode =
SecurityMode.TransportWithMessageCredential;
        binding.Security.Message.ClientCredentialType =
MessageCredentialType.UserName;

    // 2\. Endpoint address sets the service Uri.
    EndpointAddress endpointAddress = new EndpointAddress(new
Uri(url));

    // 3\. Channel factory combines binding options with the service
address.
    ChannelFactory<WebApiReference.INetTerrainWebApi> factory =
new ChannelFactory<WebApiReference.INetTerrainWebApi>(binding,
endpointAddress);

    // 4\. Add user credentials to the factory.
    // The service accepts native netTerrain or Active Directory
users.
    // To distinguish AD users from native ones the AD postfix '|'
AD_H4fU7d' must be added:
    factory.Credentials.UserName.UserName = username;
    factory.Credentials.UserName.Password = password;

    // 5\. This line removes client-side certificate validation.
Otherwise we'll need the same certificate
    // installed on the client machine.

factory.Credentials.ServiceCertificate.Authentication.CertificateValidati
=
X509CertificateValidationMode.None;

    return factory;
}

```

This method requires the following references that must be added at the beginning of your code (before the namespace definition):

```
using System;
using System.ServiceModel;
using System.ServiceModel.Security;
```

Your application should now be able to build, without any errors.

2.3.3 Creating and testing the web service connection

With the helper method just added, it is now very easy to create the connection:

```
ChannelFactory<WebApiReference.INetTerrainWebApi> factory =
CreateConnectionFactory(
    @"https://eng.graphicalnetworks.com/gncore5qa/WebApi/
NetTerrainWebApi.svc",
    "username",
    "password");
WebApiReference.INetTerrainWebApi connection =
factory.CreateChannel();
```

If you are passing credentials as an Active Directory user, refer to the syntax below:

```
ChannelFactory<WebApiReference.INetTerrainWebApi> factory =
CreateConnectionFactory(
    @"https://eng.graphicalnetworks.com/gncore5qa/WebApi/
NetTerrainWebApi.svc",
    "username|AD_H4fU7d", // Username postfix to distinguish AD users.
    "password");
WebApiReference.INetTerrainWebApi connection =
factory.CreateChannel();
```

Now that we have a channel for the factory, we can proceed to test it. The following syntax is not only intended to test the connection itself, but can also precede every method you write:

```
try
{
    // Test call.
    connection.TestConnection();
```

```

    }
    catch (FaultException<FaultInfo> info)
    {
        // FaultException is the type that refers to any errors caught via
        Web API.
        .....// The "info" parameter may contain
        // some useful data about the cause of the error.
        Console.WriteLine(string.Format("Connection failed: {0}",
        info.Detail.Details));
    }
    catch (Exception ex)
    {
        // Unknown exception.
        Console.WriteLine(string.Format("Connection failed: {0}",
        ex.Message));
    }
    Console.WriteLine("Connection established.");
    Console.ReadKey();

```

Our TestConnection sample code above does nothing except check if a connection was established correctly. In case of problems an exception will be raised. Note that the WCF specification uses Faults rather than Exceptions, to pass useful information about errors through the open channel. As such, the following reference is required at the beginning of your code to support the FaultInfo class:

```
using WebApiTest.WebApiReference;
```

Below is the complete code for the Main method (without references):

```

static void Main(string[] args)
{
    // Create connection.
    ChannelFactory<WebApiReference.INetTerrainWebApi> factory =
    CreateConnectionFactory(
        @"https://eng.graphicalnetworks.com/gncore5qa/WebApi/
NetTerrainWebApi.svc",
        "username", // Username postfix to distinguish AD users.
        "password");
    WebApiReference.INetTerrainWebApi connection =
    factory.CreateChannel();
    try
    {
        // Test call.

```

```

        connection.TestConnection();
    }
    catch (FaultException<FaultInfo> info)
    {
        // FaultException is the type that refers to any errors caught via
        // Web API.
        .....// The "info" parameter may contain
        // some useful data about the cause of the error.
        Console.WriteLine(string.Format("Connection failed: {0}",
            info.Detail.Details));
    }
    catch (Exception ex)
    {
        // Unknown exception.
        Console.WriteLine(string.Format("Connection failed: {0}",
            ex.Message));
    }
    Console.WriteLine("Connection established.");
    Console.ReadKey();
}

```

2.4 Setting up your Web API with no SSL protection

You can configure your Web API to interface netTerrain via an unprotected communications channel. The recommended setting to use this unsecured configuration is a controlled environment (such as a secure LAN network) where the traffic between the client and the service cannot be intercepted from the outside.

2.4.1 Configuring the web.config file for unprotected access

The full configuration is shown here:

```

<system.serviceModel>
    <services>
        <service name="NetTerrain.WebApi.Web ApiService">
            <endpoint address="" binding="customBinding"
bindingConfiguration="AllowInsecureTransportBinding"
            contract="NetTerrain.WebApi.INetTerrainWebApi" />
            <endpoint address="mex" binding="mexHttpBinding"
contract="IMetadataExchange" />
        </service>
    </services>

```

```

<behaviors>
    <serviceBehaviors>
        <behavior name="">
            <serviceMetadata httpGetEnabled="true" />
            <serviceDebug includeExceptionDetailInFaults="true" />
            <serviceCredentials>
                <userNameAuthentication
                    userNamePasswordValidationMode="MembershipProvider"
                    membershipProviderName="NetTerrainMembershipProvider" />
            </serviceCredentials>
        </behavior>
    </serviceBehaviors>
</behaviors>
<bindings>
    <customBinding>
        <binding name="AllowInsecureTransportBinding">
            <textMessageEncoding />
            <security authenticationMode="UserNameOverTransport"
                allowInsecureTransport="true" />
            <httpTransport />
        </binding>
    </customBinding>
</bindings>
</system.serviceModel>

```

2.4.2 Configuring the client application for unprotected access

To allow an end-user client application to access an unprotected Web API channel factory, the source code will require changes to match the corresponding settings of your configuration file:

```

private static ChannelFactory<WebApiReference.INetTerrainWebApi>
CreateConnectionFactory(
    string url, string username, string password)
{
    // 1\. Configure security properties for unprotected access.
    var security =
        SecurityBindingElement.CreateUserNameOverTransportBindingElement();
    security.EnableUnsecuredResponse = true;
    security.AllowInsecureTransport = true;

    // 2\. Create custom binding element with unprotected security,

```

```

text message encoding
// and http transport.
var customBinding = new CustomBinding(security,
new TextMessageEncodingBindingElement(),
new HttpTransportBindingElement());

// 3\. Endpoint address sets the service Uri.
EndpointAddress endpointAddress = new EndpointAddress(new
Uri(url));

// 4\. Channel factory combines binding options with the service
address.
ChannelFactory<WebApiReference.INetTerrainWebApi> factory =
new
ChannelFactory<WebApiReference.INetTerrainWebApi>(customBinding,
endpointAddress);

// 5\. Add user credentials to the factory.
// The service accepts native netTerrain or Active Directory
users.
// To distinguish AD users from native ones the AD postfix '|'
AD_H4fU7d' must be added
// to the username.
factory.Credentials.UserName.UserName = username;
factory.Credentials.UserName.Password = password;

return factory;
}

```

2.5 Custom Modules

The functionality of your netTerrain application can be extended with custom modules (also referred to as "extension modules"). These are user generated dynamic-link libraries (or DLL extensions) written in C# or any other language that supports WCF and Named Pipes (more on that later).

From the netTerrain point of view, a DLL extension is a client application that uses the netTerrain Web API. The difference between a custom module and an external application that uses the netTerrain Web API is that the custom module is integrated into your netTerrain server and accessible from the netTerrain GUI through a context menu or a node double click behavior, whereas the external application accesses netTerrain from the outside, is not exposed in the netTerrain GUI and requires authentication to work. As opposed to a regular netTerrain Web API client application, custom modules require no user interaction to establish a connection to the service.


An extension module uses the so-called Named Pipes transport protocol to interact with your netTerrain server instance.

2.5.1 Setting up Named Pipes support

To set up the communication between your custom module and netTerrain we will use a transport protocol referred to as "Named Pipes" (NP).

The NP protocol relies on local transport only, thus the client application must be placed on the same machine where the netTerrain server application lives. This is not a limitation for our custom modules deployment, quite the opposite: custom modules are integrated and interact directly with the netTerrain server. Also, by leveraging local transport on the same server, custom modules do not require authentication, let alone SSL or other security features.

To turn on NP support you need to include net.pipe binding to the netTerrain site in IIS, as shown in the screenshot below. Use "netTerrain" as the value in the Binding information field.

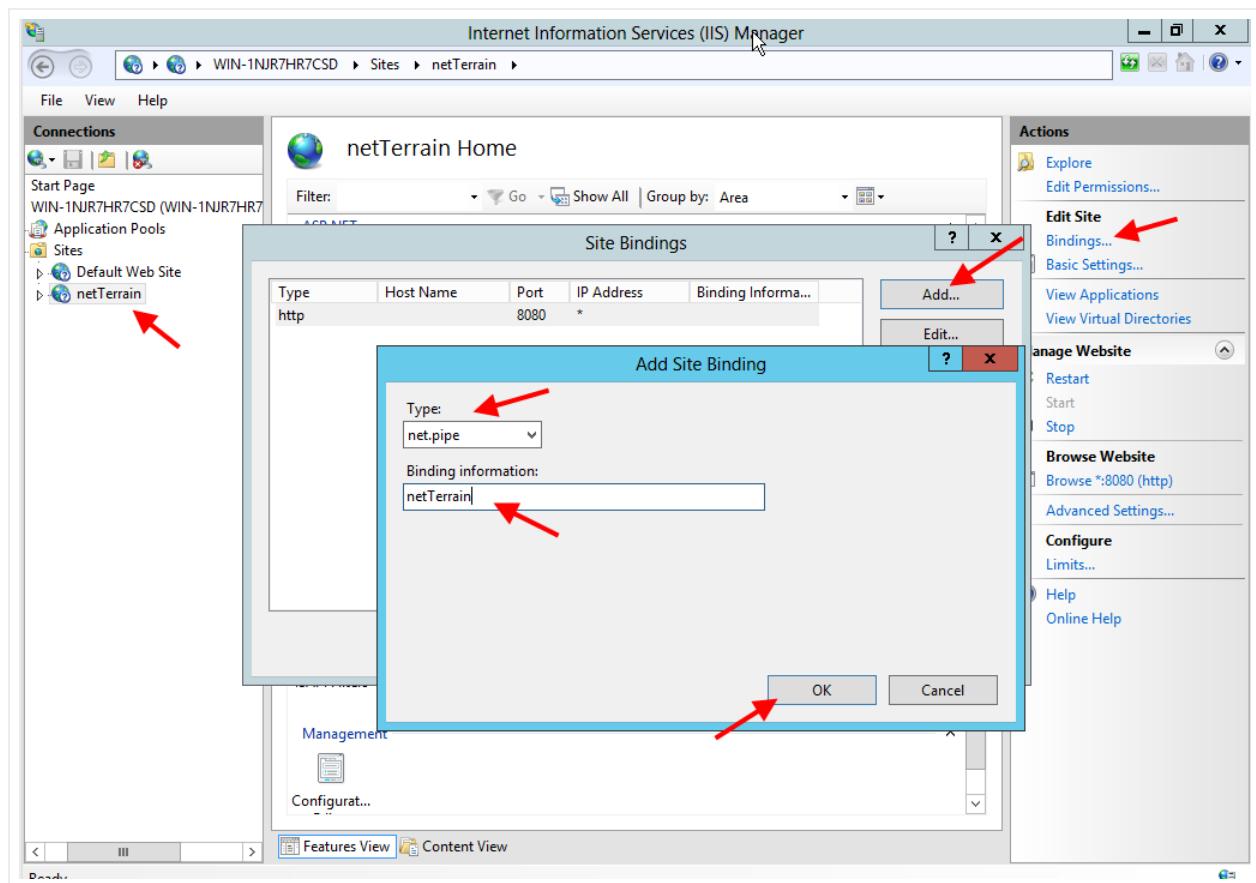

If the net.pipe binding was already added before, make sure the binding information is correct.


As a second step, add the NP support in your web.config file (under the netTerrain/vis folder in your netTerrain app server). If you applied the contents to work with the Web API specified in the previous paragraphs (2.1 to 2.4) no further action is needed.

All settings related to NP are shown below. Make sure the "WebApiNetPipeAddress" key in the "appSettings" section is present.

```
<configuration>
    ...
    <appSettings>
        ...
        <add key="WebApiNetPipeAddress" value="netTerrain" />
        ...
    </appSettings>
    ...
    <system.serviceModel>
        <services>
            <service>
                ...
                <!-- Internal endpoints for Web API extension modules
access. -->
                <endpoint address="" binding="netNamedPipeBinding"
                    bindingConfiguration="pipeBinding"
                    contract="NetTerrain.WebApi.INetTerrainWebApi" />
                <endpoint address="pmex" binding="mexNamedPipeBinding"
                    contract="IMetadataExchange"/>
                ...
            </service>
        </services>
        <bindings>
            ...
            <netNamedPipeBinding>
                <binding name="pipeBinding"
hostNameComparisonMode="Exact">
                    <security mode="None" />
                </binding>
            </netNamedPipeBinding>
            ...
        </bindings>
    </system.serviceModel>
```

```
...  
</configuration>
```

Finally, make sure the “Named Pipe Activation” windows feature is turned on:

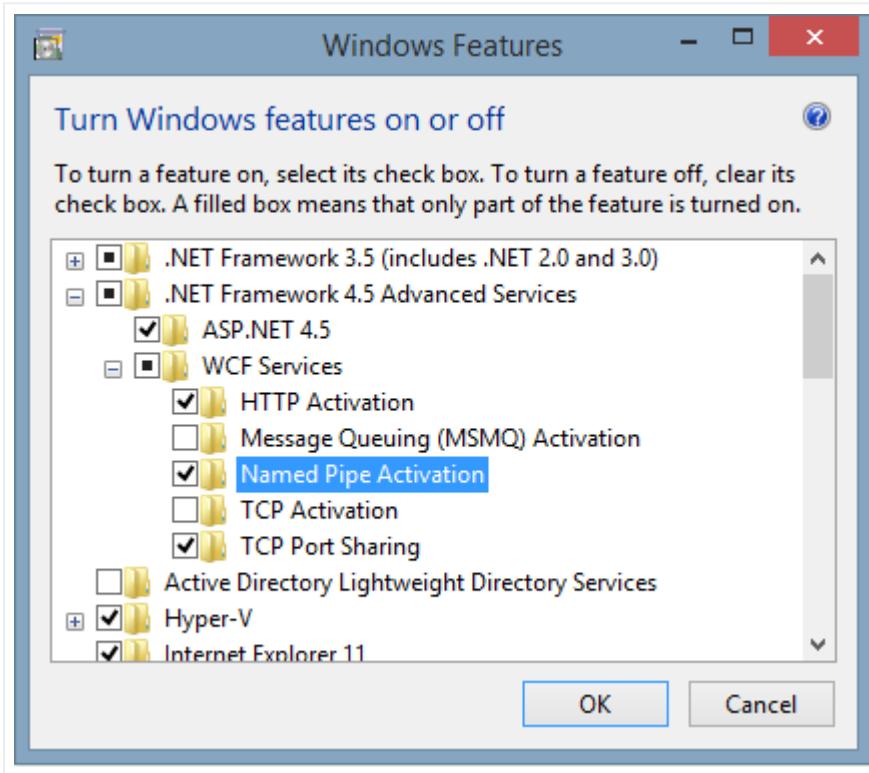


2.5.2 Creating a sample extension module

An extension module can be written in any programming language that supports WCF and NP. As is usual in life, certain restrictions apply, so the easiest way is to write your extension in C#. It is also the language of choice in our guide. The netTerrain installer provides a sample extension module called NetTerrainExtModule, which we will refer to in the upcoming exercise. You can find it under the API folder of your netTerrain server installer, typically under C:\ProgramData\Graphical Networks\netTerrain\vis\WebApi\modules. To test it you must be able to access the netTerrain instance with a Web API call already.

2.5.2.1 Opening the solution

Unzip the contents of the Extension Module Toolkit.zip file and open the NetTerrainExtModule.sln solution in Microsoft Visual Studio 2012 (or better). The structure of the project is shown below and the more important files for our exercise are marked with red arrows.

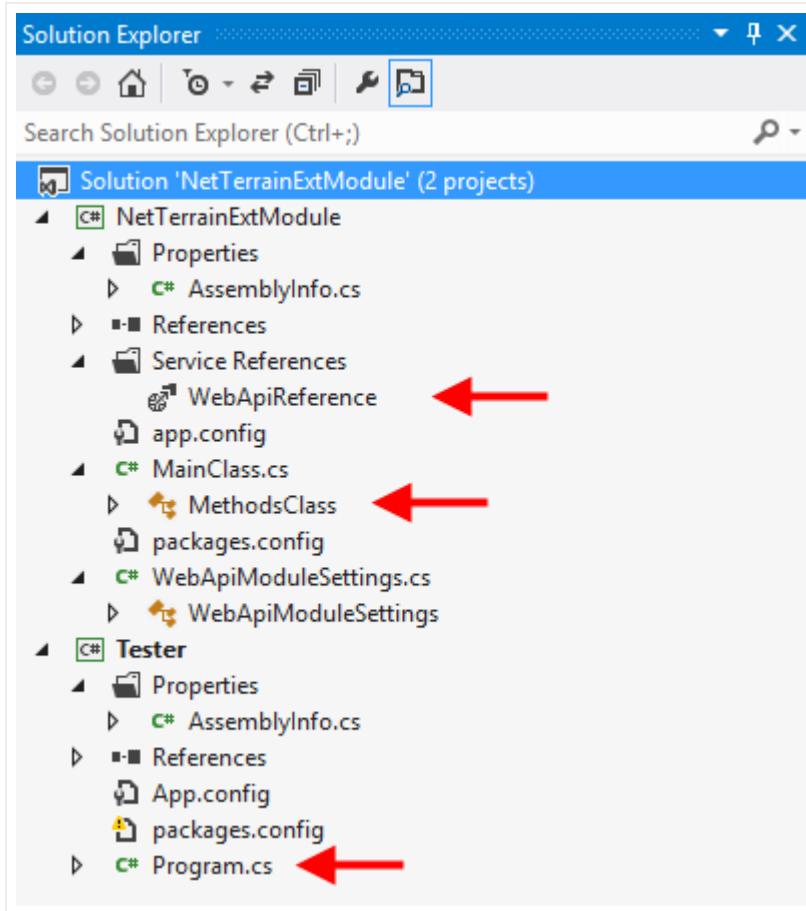


- WebApiReference: is a service reference to the netTerrain Web API. You will need to configure it to refer to a real service address you have access to.
- MethodsClass: this is the class where your extension methods will be placed.
- Program.cs: this file contains your extension module test code.

2.5.2.2 Configuring the Web API service reference

The service reference is only required during the development phase of your extension module for testing purposes. It also allows Visual Studio's IntelliSense feature to expose available methods and their signature. The service reference is not used by the extension module after its integration into netTerrain. You don't need to be concerned about specific endpoints used in the service reference since the extension module will not depend on them once placed in the actual folder of the deployed (or production) instance.

Set up the service reference by right-clicking on the WebApiReference entry in the solution explorer and select "Configure Service Reference":

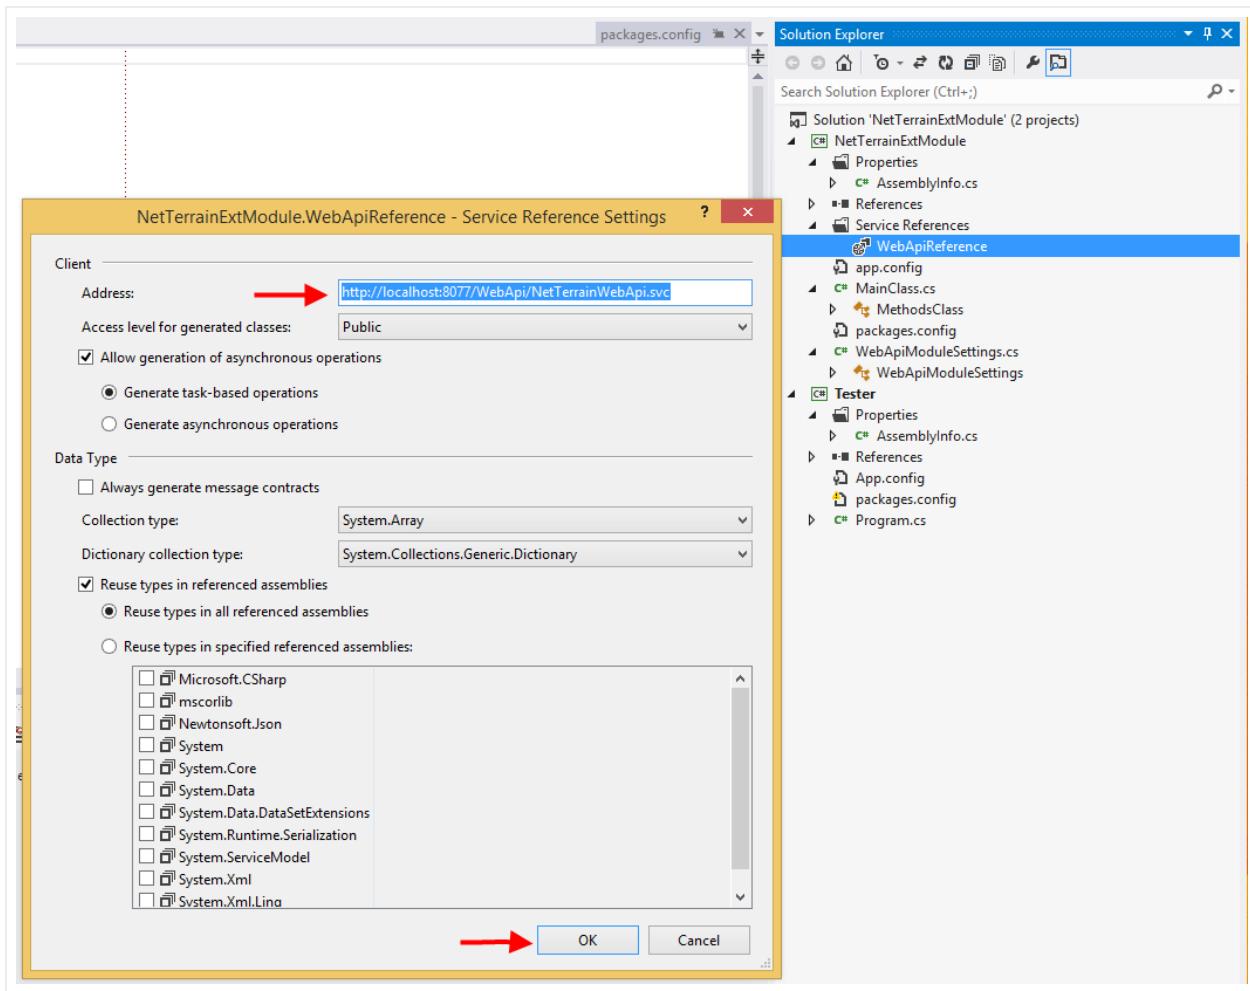

Provide a working Web API address for the existing netTerrain instance and click 'OK'. If the address is correct Visual Studio will update the reference accordingly. At this point you should be able to write and test your own methods.

2.5.2.3 Exploring the Methods Class

Our netTerrain extension module template encapsulates all operations related to the WCF service work and NP transport, so you only need to focus on writing your methods. To help you with this process, our `MethodsClass` contains a set of simple methods demonstrating different key aspects of the extension

module. Feel free to choose the methods that better align with your requirements. Below is a list of methods in our sample project and an example:

- ExtensionMethodExample
- RunMethodWithParameters
- RunARealMethodAndRefresh
- Return150NoRefresh
- RunOpenGoogleUrl
- RunOpenUrlInNetTerrain
- RunTryOpenEmptyUrl
- ThrowErrorResponse
- RunMethodWithWrongInputData
- ThrowExceptionManually

```
// Extension method. Use this template to create your own methods.  
// Parameters 'serviceUrl' and 'webApiUser' should always be at the  
first and second places  
// respectively.  
public string ExtensionMethodExample(string serviceUrl, string  
webApiUser)  
{  
    // 'CallExtensionMethod' wrapper establishes a connection with the  
service and registers the  
    // user. Always use this wrapper for your methods.  
    return CallExtensionMethod(serviceUrl, webApiUser, (proxy) =>  
    {  
        // Add your code here...  
        // Call Api methods using "proxy":  
        proxy.TestConnection();  
  
        // Make a response according to method's results. Response format  
is JSON string.  
        // Use "true" as the second parameter to force page refresh after  
method is completed.  
        return CreateSuccessfulResponse("Sucessful response text.", true);  
    } );  
}
```

Notice how this module handles all housekeeping background operations including error handling for you.

2.5.2.4 Method responses

Upon execution of an extension module, netTerrain waits for a result message. Depending on the type of result, netTerrain will trigger a specific action. These actions include:

- Informing the user of a successful operation
- Reporting to the user that something went wrong
- Opening a URL
- Refreshing the netTerrain browser page

Successful response

The successful response object and syntax are as follows:

```
string CreateSuccessfulResponse(string message, bool isRefresh);  
...  
return CreateSuccessfulResponse("Successful response text.", true);
```

When this response is received by netTerrain it shows the user a message determined by the "message" parameter. After the user closes the message dialog, it refreshes the diagram.



After clicking on 'Ok' the page is refreshed. To prevent netTerrain from refreshing itself use the 'false' flag in the second parameter of the signature.


Error Response

The error response object is defined as follows:

```
string CreateErrorResponse(string error);
```

When this response is received by the netTerrain application, it shows the user an error message determined by the 'error' parameter. Upon closing the response dialog the page is not refreshed.


```
public string ThrowErrorResponse(string serviceUrl, string webApiUser)
{
    return CallExtensionMethod(serviceUrl, webApiUser, (proxy) =>
    {
        return CreateErrorResponse("Your text of Error response here.");
    });
}
```

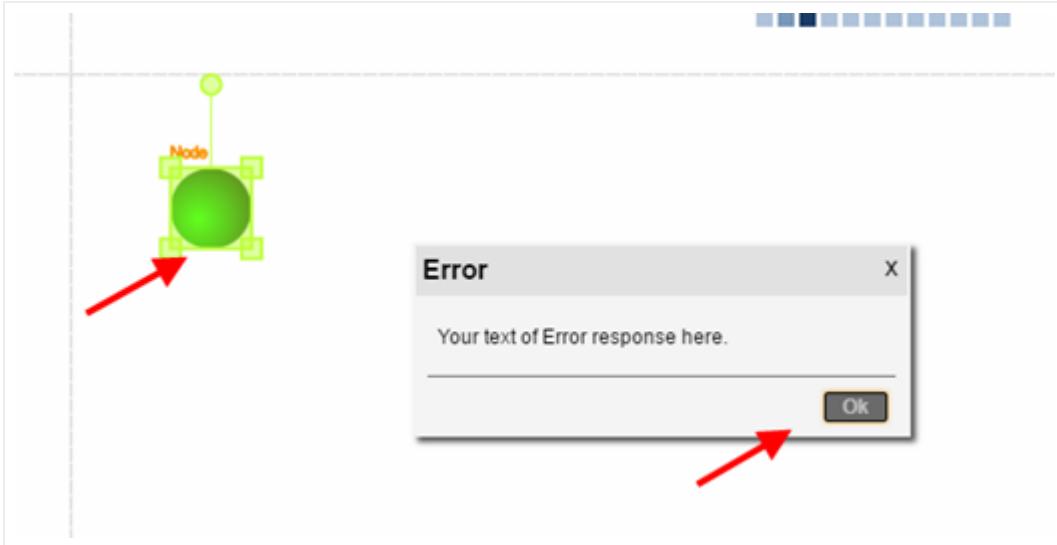

A similar response dialog is displayed automatically when an unexpected error occurs during the processing of an API method. In those cases, the contents of the error thrown by the netTerrain engine are displayed in the body of the error message. Below is an example of a function that forces an application level error to be thrown by netTerrain upon execution of the module.

```
public string RunMethodWithWrongInputData(string serviceUrl, string
webApiUser)
{
    return CallExtensionMethod(serviceUrl, webApiUser, (proxy) =>
{
    proxy.NodeSetWidth(123, 123, 123);
    return CreateSuccessfulResponse("This response will never
    be returned");
});
```

```
occur.", true);
    });
}
```

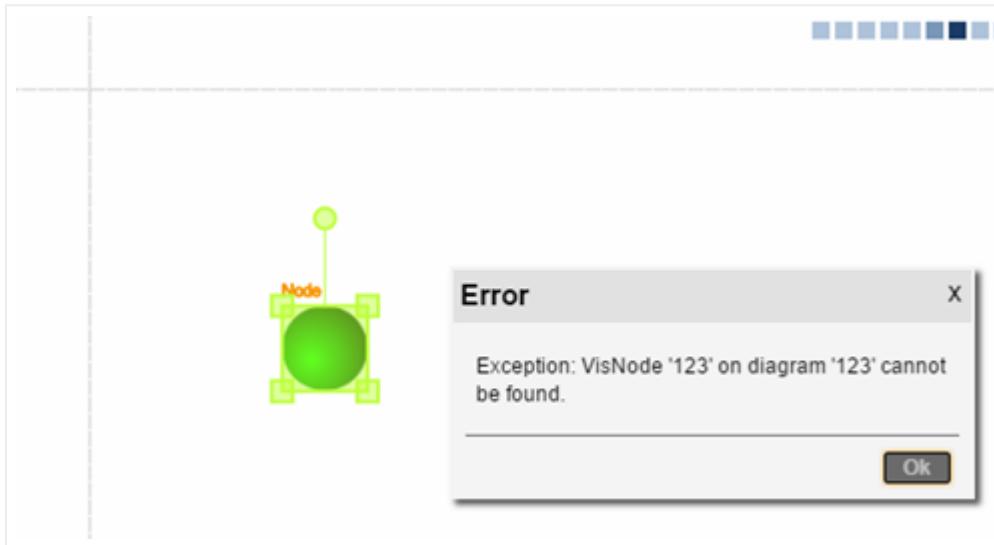

Redirection Response

The redirection response object is defined as follows:

```
string CreateSuccessfulOpenUrlResponse(string message, string url,
bool isInNewTab, bool isAddBaseUrl);
```

This is a special successful response that opens a page using the specified URL. This response does not refresh the netTerrain page.

```
public string RunOpenGoogleUrl(string serviceUrl, string webApiUser)
{
    return CallExtensionMethod(serviceUrl, webApiUser, (proxy) =>
    {
        return CreateSuccessfulOpenUrlResponse(
            "Press 'Ok' to open url...",
            @"http://google.com",
            true,
            false);
    });
}
```

Upon execution of this method, netTerrain will show a dialog prompting the user to press 'Ok' to open a page with the specified URL. When the third parameter is set to true, the corresponding web page will be opened in a new tab. The last parameter is set to true when an inner URL (netTerrain page on that same application) needs to be opened, such as the example below.

```
public string RunOpenUrlInNetTerrain(string serviceUrl, string
webApiUser)
{
    return CallExtensionMethod(serviceUrl, webApiUser, (proxy) =>
    {
        return CreateSuccessfulOpenUrlResponse(
            "Press 'Ok' to open url...",
            @"Catalog/ObjectOverrides",
            false,
            true);
    });
}
```

To open this page successfully, the URL is appended to the base URL.

2.5.2.5 Running Web API methods in the extension module

The extension module encapsulates all background work and exposes all API methods via a "proxy" object as depicted below:

```
public string RunARealMethodAndRefresh(string serviceUrl, string
webApiUser)
{
    return CallExtensionMethod(serviceUrl, webApiUser, (proxy) =>
    {
        proxy.NodeInsert("Scylla", 240000000001, 2600000000000000);
        proxy.NodeInsert("SomePoorGreekGalley", 240000000001,
26000000000000);
        proxy.NodeInsert("Charybdis", 240000000001, 2600000000000000);
        return CreateSuccessfulResponse("Three nodes have been
added.", true);
    });
}
```

Using the proxy object, all methods in the API reference are available. This allows users to extend netTerrain functionality by manipulating objects in netTerrain and extend its functionality. Not too shabby.

2.5.2.6 Using parameters

Each custom module method includes two mandatory parameters already seen before (serviceUrl and webApiUser). In addition to these two parameters, several optional parameters can be added to your method signature so that netTerrain can work with custom data. Below is an example showing a series of parameters in the method call:

```
public string RunMethodWithParameters(string serviceUrl, string
webApiUser,
    long id, long diagramId, long userId, string selection, string x,
    string y,
    string containerId, string stringParam, bool boolParam, int
intParam,
    string sqlExpressionParam, float floatParam, double doubleParam,
    float floatSqlExpParam)
{
    return CallExtensionMethod(serviceUrl, webApiUser, (proxy) =>
    {
        return CreateSuccessfulResponse("Parameters: " +
            "Id(long): " + id + "\n" +
            "DiagramId(long): " + diagramId + "\n" +
            "UserId(long): " + userId + "\n" +
            "Selection(string): " + selection + "\n" +
            "X: " + x + "\n" +
            "Y: " + y + "\n" +
            "ContainerId: " + containerId + "\n" +
            "String param: " + stringParam + "\n" +
            "Bool param: " + boolParam + "\n" +
            "Int param: " + intParam + "\n" +
            "SQL Expression param: " + sqlExpressionParam + "\n" +
            "Float param: " + floatParam + "\n" +
            "Double param: " + doubleParam + "\n" +
            "Float SQL Exp param: " + floatSqlExpParam + "."
            , false);
    });
}
```

Later in this section we explore how to use all these parameters and pass them in netTerrain.

2.5.2.7 Testing extension module methods

A testing console application is included in our sample solution containing a “Program.cs” file. It provides a simple testing example, as shown below:


```
static void Main(string[] args)
{
    NetTerrainExtModule.MethodsClass serviceTester =
        new NetTerrainExtModule.MethodsClass(
            "http://localhost:8077/WebApi/NetTerrainWebApi.svc",
            "serviceUser",
            "servicePassword");
    string result =
        serviceTester.RunARealMethodAndRefresh(string.Empty, string.Empty);
    Console.WriteLine(result);
    Console.ReadKey();
}
```

Note that the first and second parameters of the API method consist of empty strings. Leave them empty whenever you are using the module in test mode. netTerrain will automatically use them after the integration of the extension module into its corresponding instance.

Also note that for testing purposes you need proper netTerrain Web API and service credentials. This is only the case for testing, once integrated into netTerrain, the module utilizes the credentials of the user invoking the module.

Be careful when testing an extension module as you could still be affecting an actual netTerrain instance!

In the image below, we show the results of our test case above, after being executed:

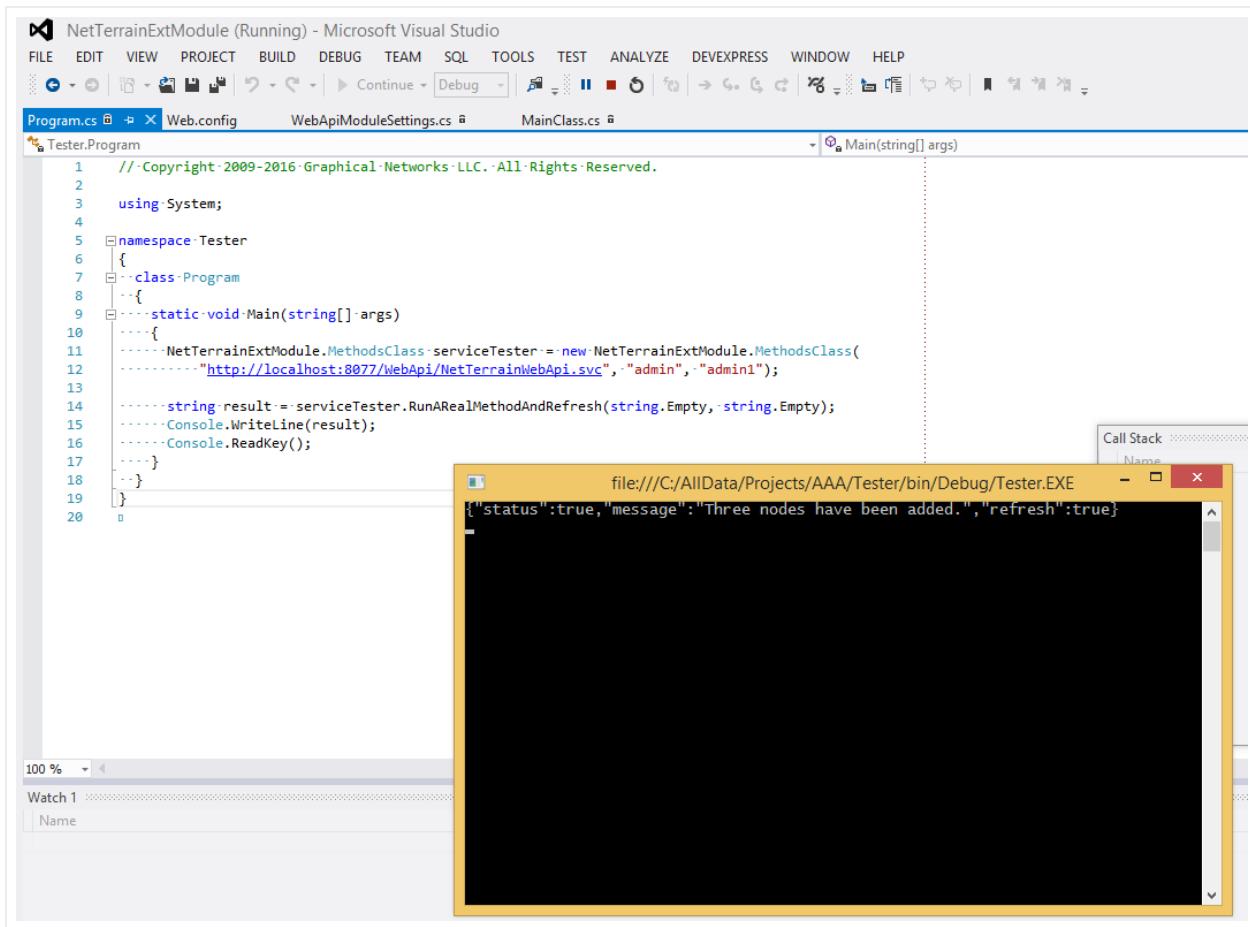


The extension module methods return responses in JSON format, such as the following output:

```
{
    "status":true,
    "message":"Three nodes have been added.",
    "refresh":true
}
```


You can analyze this output to check if your method works as expected.

2.5.2.8 Integrating the extension module into netTerrain

After successful testing of your method, we recommend rebuild your project in “Release” mode and fetching the resulting DLL file - in this case the “NetTerrainExtModule.dll” file - found under the “ExtModuleOutput” folder in your solution.

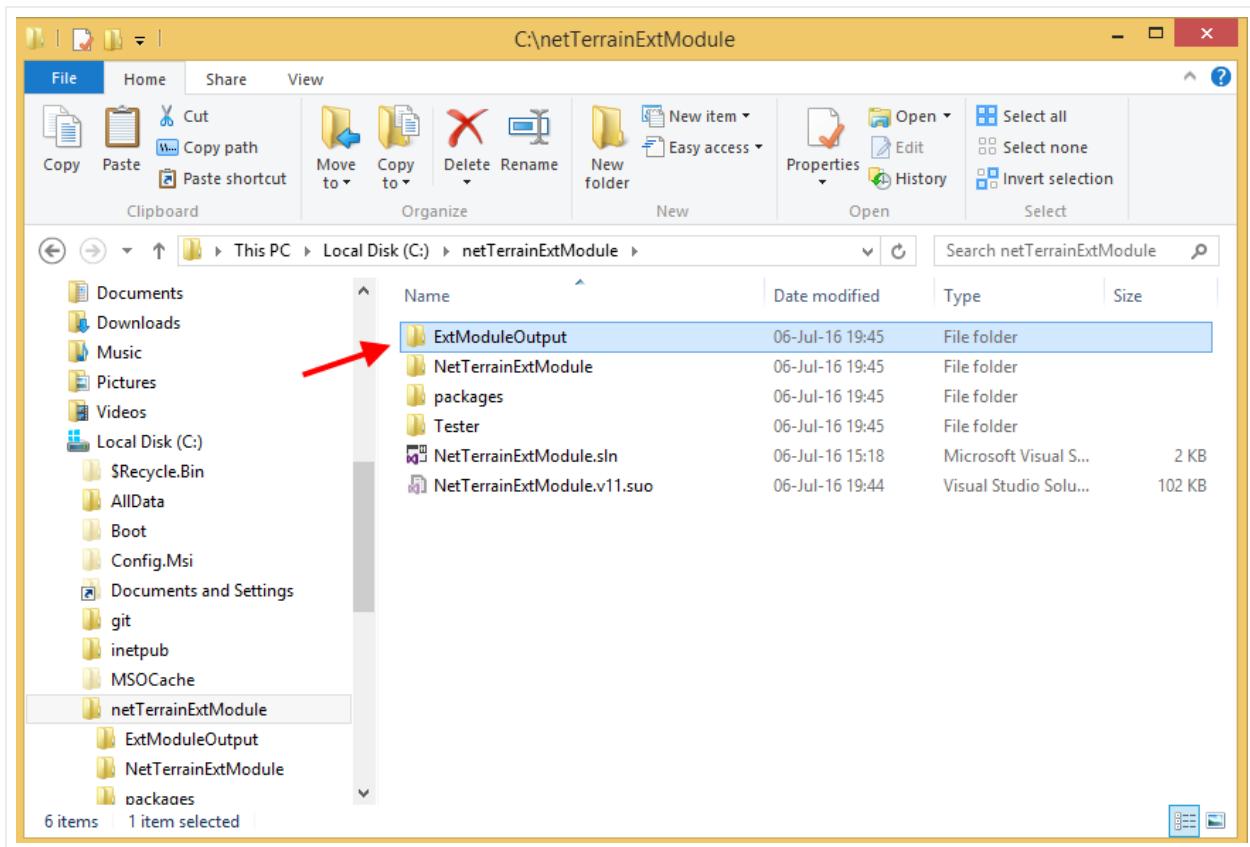

You can rename the DLL file and integrate it into your netTerrain instance. To do so, copy the file to the "WebApi/modules" folder under your netTerrain application instance path.

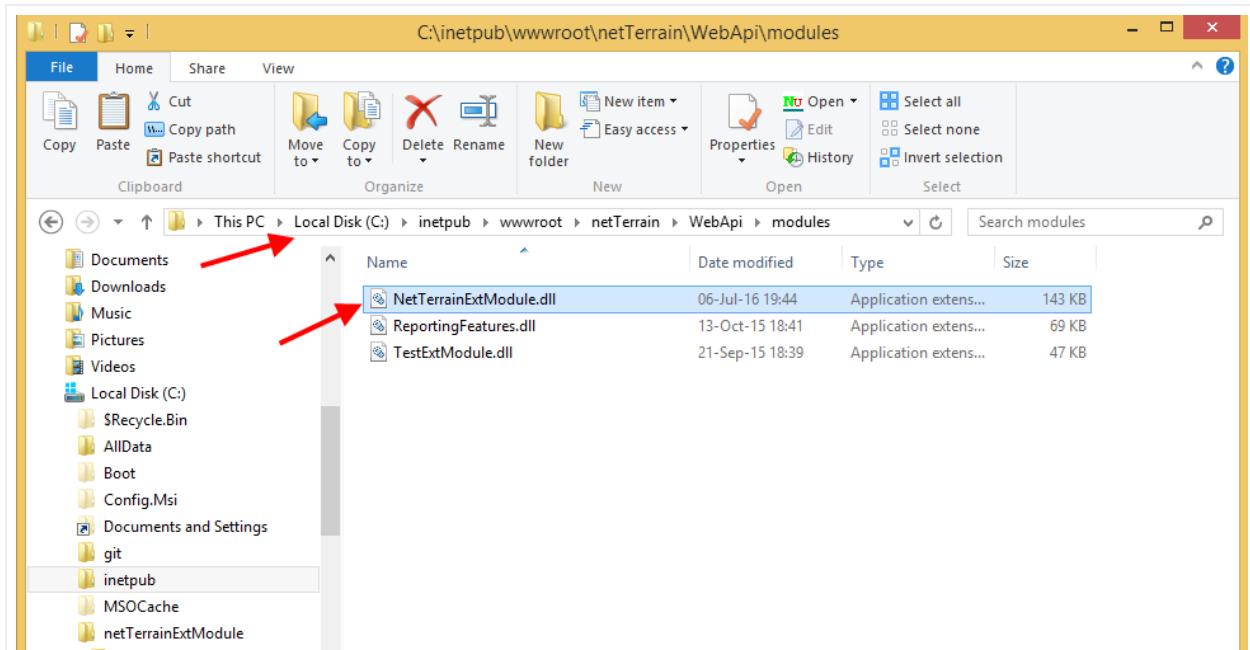

Now your module is integrated! You can use this within any netTerrain instance, the only requirement being that the Web API version you use matches the version of the targeted netTerrain instance.

2.5.3 Using the extension module from the netTerrain GUI


After all this work creating our extension module, we want to make sure our end users can take advantage of it.

There are two ways to utilize extension modules within the netTerrain GUI:

- Through node double-click behaviors
- Inside the custom Actions menu in the diagram or object context menu

2.5.3.1 Setting up a double-click custom action


Log into netTerrain and select a node you want to use to run the extension module. Right click and select “Double Click Behavior”. Click on “Run Web API module” and select your module and a method you want to run:

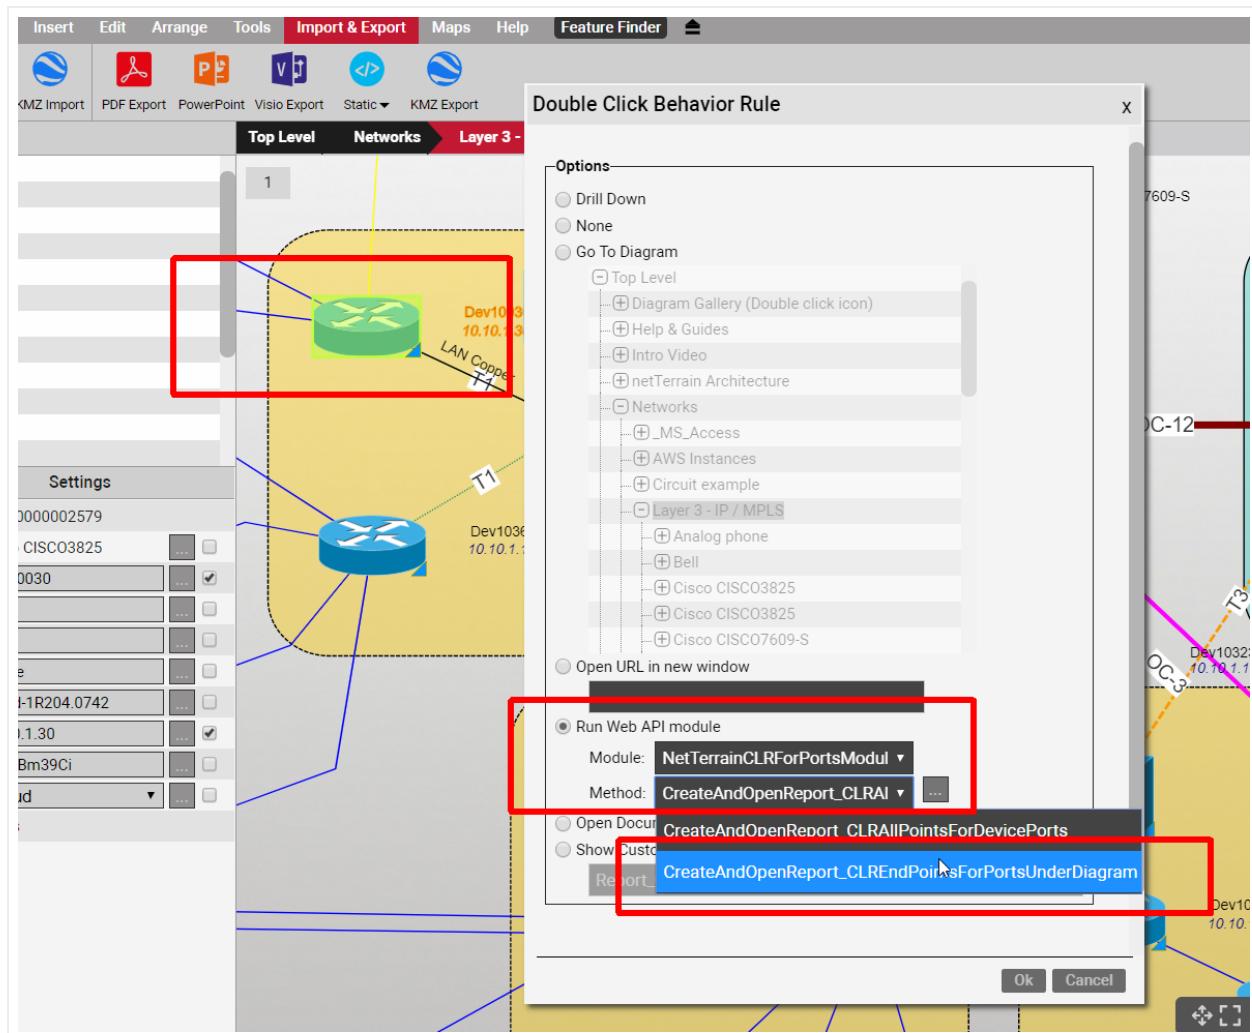

Click "Ok" to close the dialog and double-click the node to run the selected method. netTerrain will show you a message with the result after processing the method.

2.5.3.2 Setting up a custom action

Custom Actions are also accessible from a diagram or object right-click context menu.

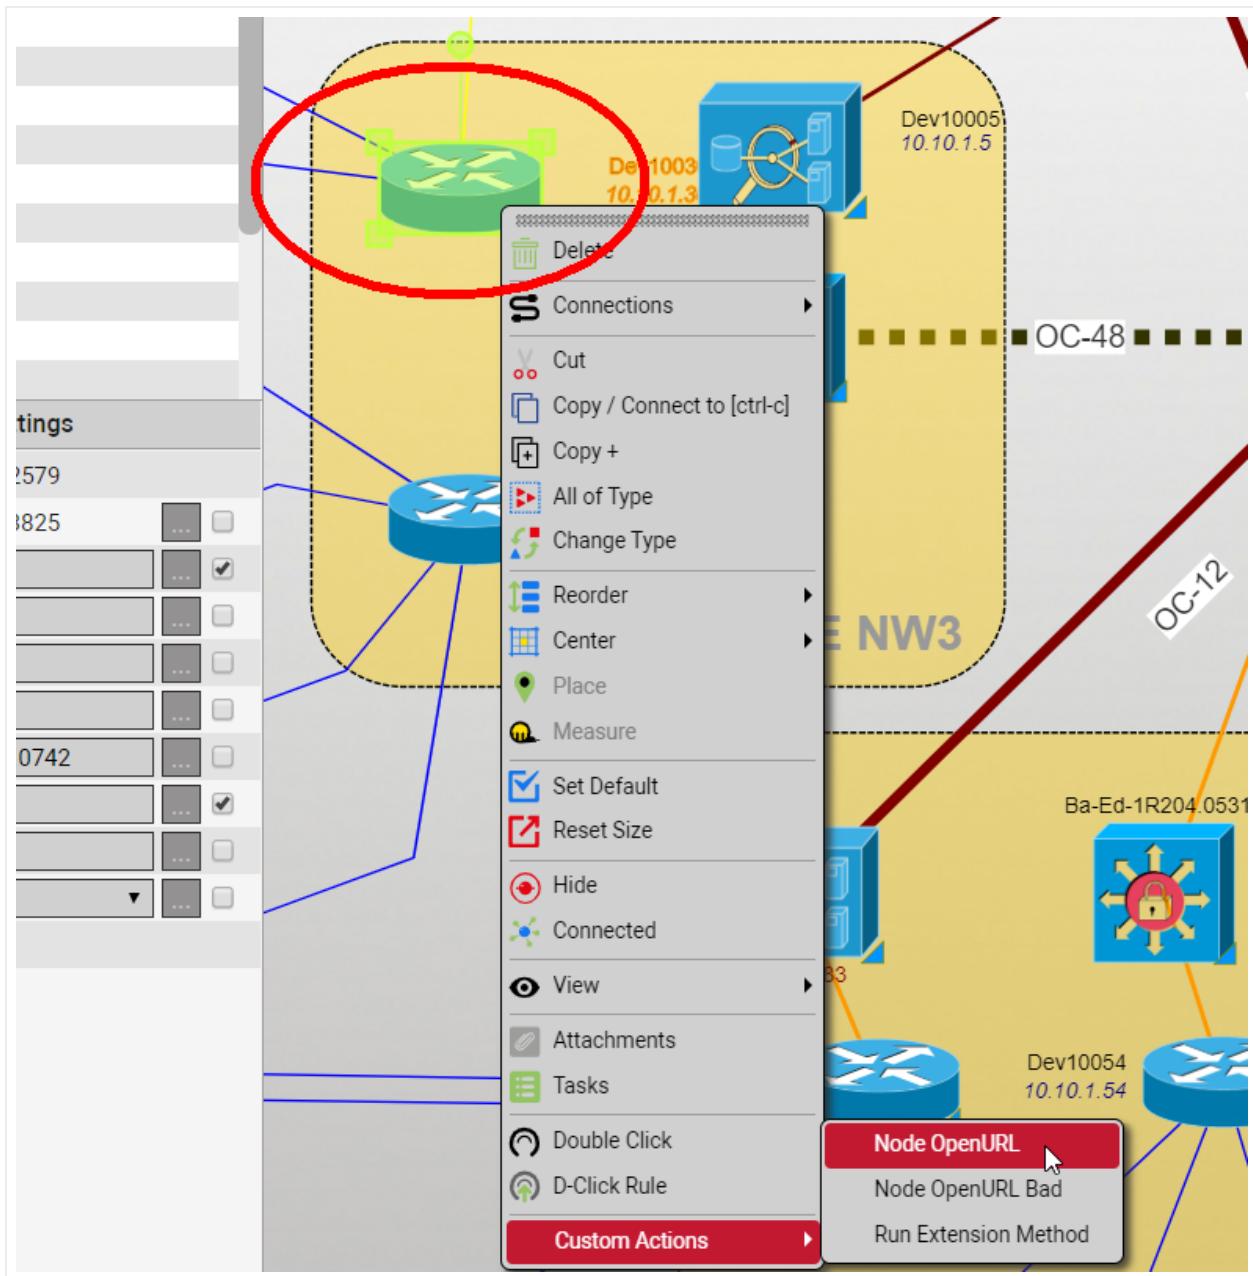

All custom actions are defined in an xml file located in C:\ProgramData\Graphical Networks\netTerrain\vis\CustomActions\CustomUserActions.xml

Below is an example of a custom action xml definition:

```

<CustomUserAction>
  <Name>Display Name Goes Here</Name>
  <Action>runextmethod</Action>
  <Filter>nodes,links,diagrams</Filter>
  <Parameters>
    ...
  </Parameters>

```

```

<Module>NetTerrainExtModule.dll</Module>
<Method>RunMethodWithParameters</Method>
<MethodParameters>
    <Id>[Id]</Id>
    <DiagramId>[DiagramId]</DiagramId>
    <UserId>[UserId]</UserId>
    <Selection>[Selection]</Selection>
    <X>[X]</X>
    <Y>[Y]</Y>
    <ContainerId>[ContainerId]</ContainerId>
    <StringParam>My String Parameter</StringParam>
    <BoolParam>true</BoolParam>
    <IntParam>7298</IntParam>
    <SQLExpParam>$atest</SQLExpParam>
    <FloatParam>-677</FloatParam>
    <DoubleParam>434754467298</DoubleParam>
    <DoubleSQLExpParam>$atest</DoubleSQLExpParam>
</MethodParameters>
</Parameters>
</CustomUserAction>


```

In the next section we will review the parameters that can be used in the context of a custom module.


2.5.3.3 Setting up a trigger

You can set up triggers in netTerrain for any node instance. A trigger can execute a method inside a custom dll, which will be triggered upon the event being fired. Currently we only support the property change event. This event is automatically triggered by the netTerrain server when the property on the object instance for which the trigger was defined experiences a change in value.

To use the property change event first right click on the desired node that is supposed to trigger the event and click on 'Triggers':

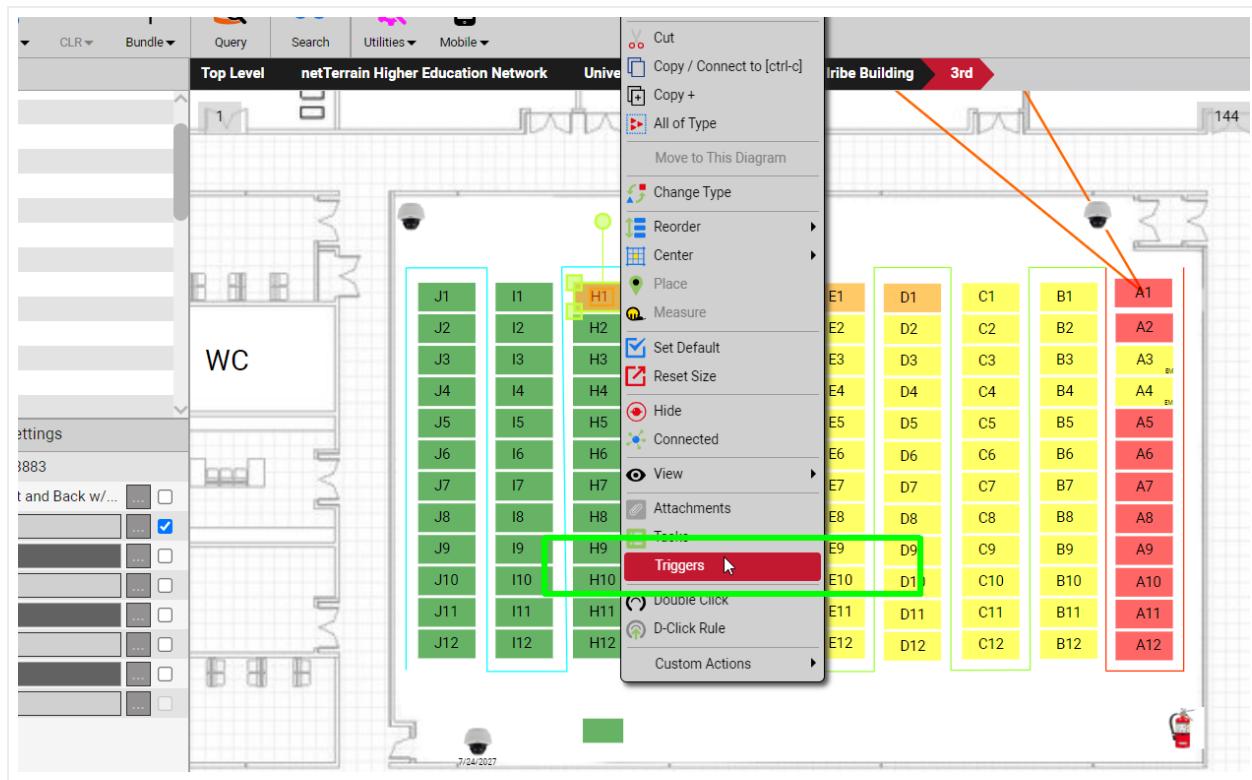


In the 'object triggers' dialog box click on Add New to define your new property change trigger event:

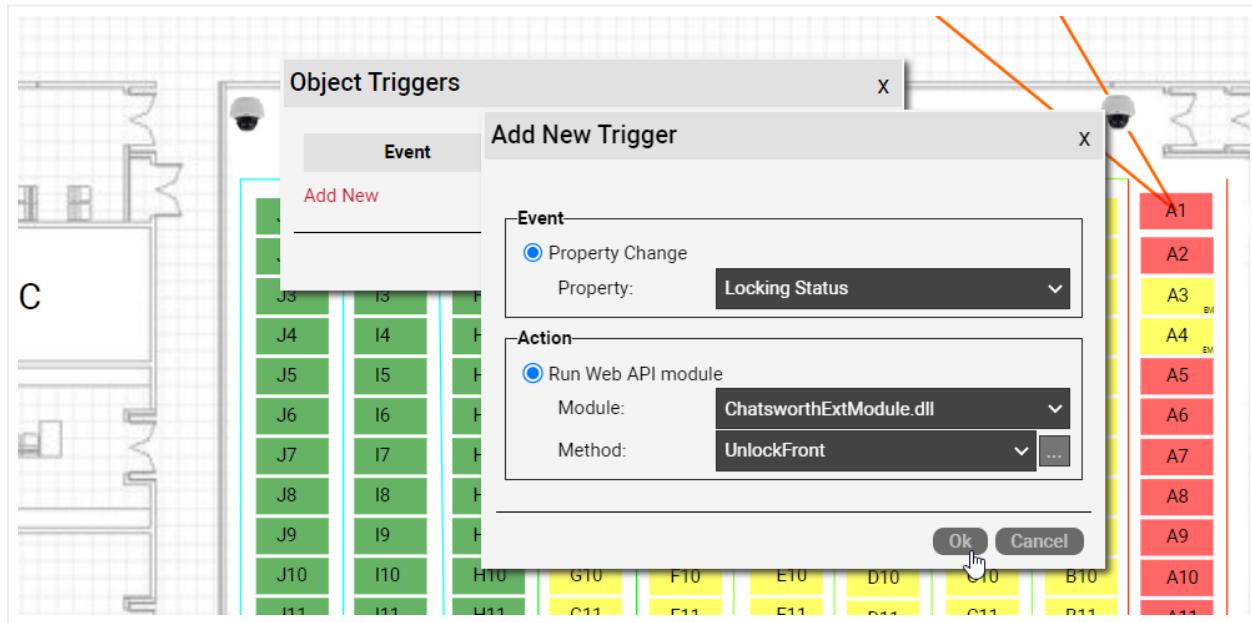


First, choose the object property that will trigger the event and then for the 'Action', pick the custom module and method that should be executed upon the property change.

2.5.4 Using parameters

netTerrain can pass parameters of different types to a custom module method. The previous showed an example of how to use parameters in the custom action xml definition. The image below shows an example of how to edit parameters when invoking a custom module through a double-click action override:

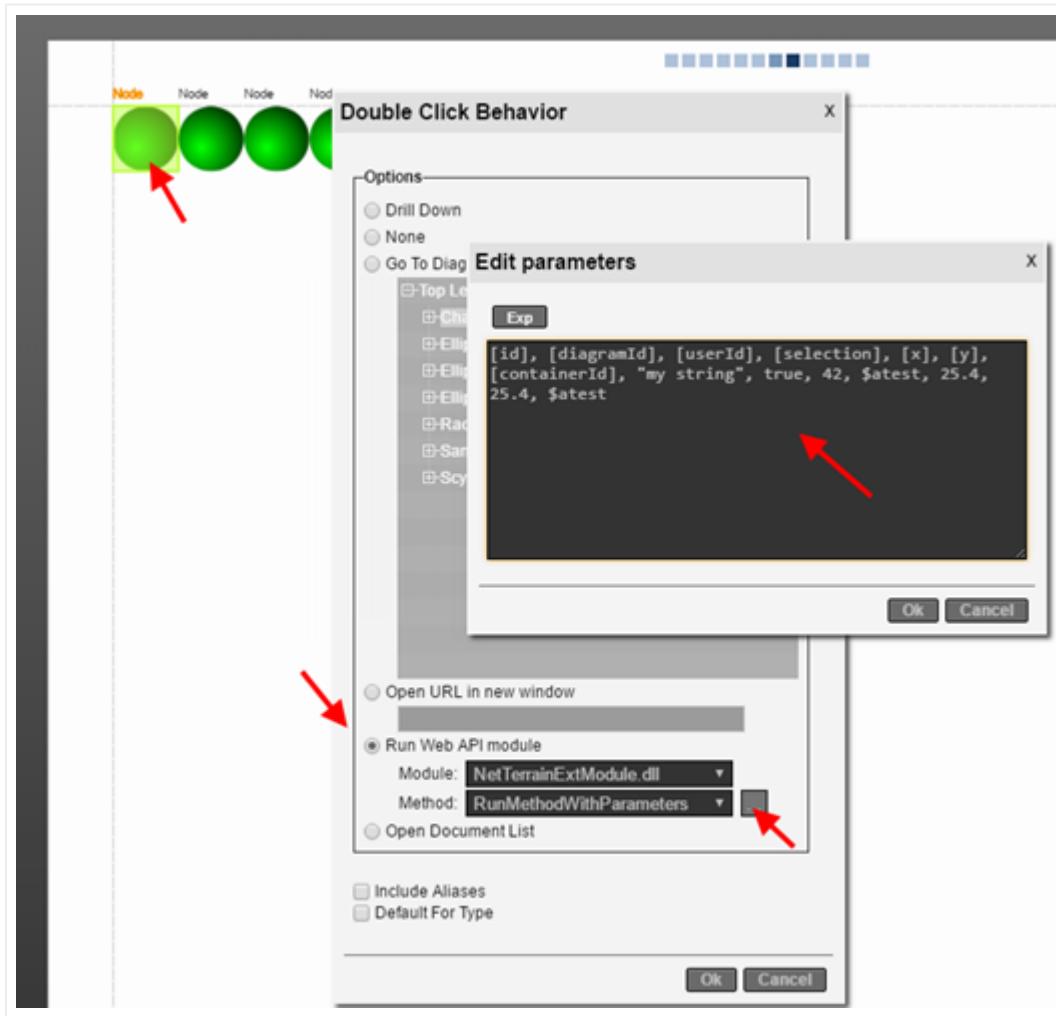

The result of executing the above method with the provided parameters is shown below:

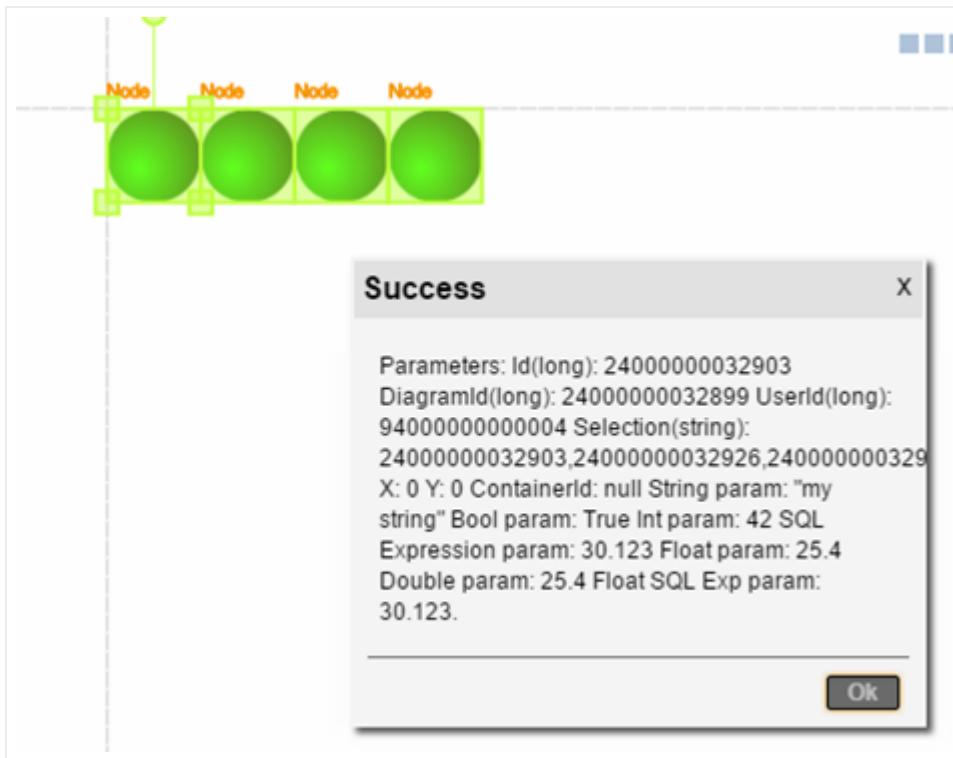

All the accepted parameter types are defined in the extension method.

```
public string RunMethodWithParameters(  
    string serviceUrl,  
    string webApiUser,  
    long id,  
    long diagramId,  
    long userId,  
    string selection,  
    string x,  
    string y,  
    string containerId,  
    string stringParam,  
    bool boolParam,  
    int paramInt,  
    string sqlExpressionParam,  
    float floatParam,  
    double doubleParam,  
    float floatSqlExpParam  
) ;
```

The following table shows a set of sample parameter data, its associated type, computed value and definition:

Parameter	Type	Value	Definition
id	long	24000000032903	Id of the current node (for example, the node a user double-clicked on to run the custom module method)
diagramId	long	24000000032899	Id of the current diagram
userId	long	94000000000004	Current user Id
selection	string	"24000000032903, 24000000032926, 24000000032927, 24000000032928"	A set of Ids of currently selected nodes. The set is represented as a string.
x	string	0	X coordinate of the current node
y	string	0	Y coordinate of the current node
containerId	string	"null"	If the current node is mounted in some rack container this parameter contains the id of this container. Otherwise it is null.
"my string"	string	"my string"	Constant string
true	bool	true	Constant bool value
42	int	42	Constant int value
\$atest	string	"30.123"	netTerrain SQL expression (please check the database description and scripting guide for more details about expressions). In this case the method returns the value 30.123\. The result is represented as a string.
25.4	float	25.4	Constant float value
25.4	double	25.4	Constant double value
\$atest	float	30.123	Same SQL expression as above, this time returning the result as a float value.

3 Main API Classes

3.1 NetTerrain.WebApi Namespace

The NetTerrain.WebApi namespace contains several enumerations and classes and also provides the INetTerrainWebApi interface containing netTerrain's Web API methods.

3.1.1 Classes

Class	Description
	FaultInfo This class contains fault information including a description of what caused the fault during the Web API method execution. If the fault was caused by an exception in netTerrain, FaultInfo provides exception details.
	FileUploadAttributes This class combines parameters for uploading a file to the server.
	Group This class contains parameters of a user group.
	LinkCategory This class contains parameters of a link category.
	LinkOverride This class contains parameters of a link property override.
	LinkType This class represents a link type object.
	LinkTypeProperty This class contains parameters of a link type property.
	NewNodeTypeInfo This class combines parameters of a new node type in conjunction with the CatalogAddNodeType(NewNodeTypeInfo) method - an older version of the node type creation method for versions compatibility. It is advised to use the newer method [CatalogNodeTypeAdd(String, NodeTypeGroups, String, Boolean)](#459-catalognodetypeadd-method).
	NodeCategory This class contains parameters of a node category.
	NodeOverride This class contains parameters of a node property override.
	NodeType This class represents a node type object.

Icon	Class	Description
	NodeTypeProperty	This class contains parameters of a node type property.
	User	This class contains parameters of a user.
	Vendor	This class contains parameters of a vendor. Applicable for node types as Racks, Devices or Cards.

3.1.2 Interfaces

Icon	Interface	Description
	INetTerrainWebApi	The INetTerrainWebApi interface provides all methods exposed in the netTerrain Web API. Ultimately, these are the calls that API users will be utilizing most of the time to build external applications that interact with netTerrain.

3.1.3 Enumerations

Icon	Enumeration	Description
	ArrowStyles	This enumeration type sets link arrow styles.
	DoubleClickBehaviors	This enumeration type sets the double-click behavior of a node.
	FontFamilies	This enumeration type sets available text font families.
	HierarchySearchModes	This enumeration type sets how deeply nodes should be searched in the hierarchy tree.
	InstanceEffects	This enumeration type sets effects for an overridden instance.
	LinkStyles	This enumeration type sets styles of lines used to display links.
	NodeTypeGroups	This enumeration type describes groups of node types used in netTerrain.

Enumeration	Description
 OverrideRules	This enumeration type sets override rules for node and link properties.
 Roles	This enumeration type sets group roles.
 TextAligns	This enumeration type sets horizontal alignment for multiline text within a field.
 TextJustification	This enumeration type sets the text field justification point.
 UpwardsPropagations	This enumeration type sets the upwards propagation effect applied to an overridden instance.

3.2 ArrowStyles Enumeration

This enumeration type sets link arrow styles.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

3.2.1 Syntax

C#

```
public enum ArrowStyles
```

3.2.2 Members

Member name	Value	Description
Plain	0	Plain.
Reversed	1	Reversed.
Solid	2	Solid.
SolidReversed	3	Solid Reversed.
Open	4	Open.
OpenReversed	5	Open Reversed.
Triangle	6	Triangle.

Member name	Value	Description
TriangleReversed	7	Triangle Reversed.
TriangleSolid	8	Triangle Solid.
TriangleSolidReversed	9	Triangle Solid Reversed.
Diamond	10	Diamond.
DiamondSolid	11	Diamond Solid.
Square	12	Square.
SquareSolid	13	Square Solid.
Circle	14	Circle.
CircleSolid	15	Circle Solid.

3.2.3 See Also

[NetTerrain.WebApi Namespace](#)

3.3 DoubleClickBehaviors Enumeration

This enumeration type sets the double-click behavior of a node.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

3.3.1 Syntax

C#

```
public enum DoubleClickBehaviors
```

3.3.2 Members

Member name	Value	Description
DrillDown	0	Drill down.
None	1	Do nothing.

Member name	Value	Description
GoToDiagram	2	Go to a specific diagram.
OpenURL	3	Open a specified URL.

3.3.3 See Also

[NetTerrain.WebApi Namespace](#)

3.4 FaultInfo Class

This class contains fault information including a description of what caused the fault during the Web API method execution. If the fault was caused by an exception in netTerrain, **FaultInfo** provides exception details.

3.4.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.FaultInfo

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

3.4.2 Syntax

C#

```
public class FaultInfo
```

The **FaultInfo** type exposes the following members.

3.4.3 Constructors

	Name	Description
	FaultInfo	

3.4.4 Fields

	Name	Description
◆	Description	Fault description.
◆	Details	Full content of the exception thrown in netTerrain.
◆	Message	Exception message thrown in netTerrain.
◆	Type	Type of the exception thrown in netTerrain.

3.4.5 See Also

[NetTerrain.WebApi Namespace](#)

3.5 FileUploadAttributes Class

This class combines parameters for uploading a file to the server.

3.5.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.FileUploadAttributes

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

3.5.2 Syntax

C#

```
public class FileUploadAttributes : IDisposable
```

The **FileUploadAttributes** type exposes the following members.

3.5.3 Constructors

Name	Description
FileUploadAttributes	

Name	Description
	

3.5.4 Methods

Name	Description
	Dispose Closes file byte stream if opened.

3.5.5 Fields

Name	Description
	FileStream Byte stream for uploading the file to the server.
	FileName Uploaded file name.
	ObjectId Id of the related object the file is intended for (Node type, node override etc).

3.5.6 See Also

[NetTerrain.WebApi Namespace](#)

3.6 FontFamilies Enumeration

This enumeration type sets the available text font families.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

3.6.1 Syntax

C#

```
public enum FontFamilies
```

3.6.2 Members

Member name	Value	Description
Arial	0	Arial.
ArialBlack	1	Arial Black.
ComicSansMS	2	Comic Sans MS.
CourierNew	3	Courier New.
Georgia	4	Georgia.
PalatinoLinotype	5	Palatino Linotype.
Tahoma	6	Tahoma.
TimesNewRoman	7	Times New Roman.
TrebuchetMS	8	Trebuchet MS.
LucidaSansUnicode	9	Lucida Sans Unicode.
LucidaConsole	10	Lucida Console.
MSSerif	11	MS Serif.
Verdana	12	Verdana.

3.6.3 See Also

[NetTerrain.WebApi Namespace](#)

3.7 Group Class

This class contains parameters of a user group.

3.7.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.Group

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

3.7.2 Syntax

C#

```
public class Group
```

The `Group` type exposes the following members.

3.7.3 Constructors

	Name	Description
	Group	

3.7.4 Fields

	Name	Description
	Id	Group id.
	IsSystem	If set to true indicates that the group belongs to system groups list and cannot be altered or deleted.
	Name	Group name.
	Role	Group role according to permissions for group members.

3.7.5 See Also

[NetTerrain.WebApi Namespace](#)

3.8 HierarchySearchModes Enumeration

This enumeration type sets how deeply nodes should be searched in the hierarchy tree.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

3.8.1 Syntax

C#

```
public enum HierarchySearchModes
```

3.8.2 Members

Member name	Value	Description
DiagramOnly	0	Search on a specified diagram only.
N_Levels	1	Search up to N levels down inclusively.
Full	2	search throughout all levels.

3.8.3 See Also

[NetTerrain.WebApi Namespace](#)

4 API Reference

4.1 INetTerrainWebApi Interface

The `INetTerrainWebApi` interface provides all methods exposed in the `netTerrain` Web API. Ultimately, these are the calls that API users will be utilizing most of the time to build external applications that interact with `netTerrain`.

Namespace: `NetTerrain.WebApi` Assembly: `NetTerrain` (in `NetTerrain.dll`) Version: 7.1.720

4.1.1 Syntax

C#

```
public interface INetTerrainWebApi
```

The `INetTerrainWebApi` type exposes the following members.

4.1.2 Methods

Name	Description
 AdminGroupAdd	This method adds a new user group.
 AdminGroupDelete	This method deletes a user group.
 AdminGroupGet	This method gets a user group.
 AdminGroupGetByName	This method gets a user group by name.
 AdminGroupUpdate	This method updates the user group.
 AdminUserAdd	This method adds a new user.
 AdminUserDelete	This method deletes a user.
 AdminUserGet	This method gets a user.
 AdminUserGetByName	This method gets a user by name.
 AdminUserSetPassword	This method changes user password.
 AdminUserUpdate	This method updates the user.
 CatalogAddLinkType	This method adds a new link type to the catalog. This is an older version of the method. It is advised to use the newer method [CatalogLinkTypeAdd(String, Boolean)]
 CatalogAddLinkTypeProperty	This method adds a new property to an existing link type in the catalog. This is an older version of the [CatalogLinkTypePropertyAdd(Int64, String, String, Boolean, Boolean, Boolean)] method. The new method was added to follow the current method naming convention.
 CatalogAddNodeType	This method adds a new node type to the catalog. This is an older version of the method. It is advised to use the newer method [CatalogNodeTypeAdd(String, NodeTypeGroups, String, Boolean)] with better handling of the TypeGroupNumber parameter.

Name	Description
CatalogAddNodeTypeProperty	This method adds a new property to an existing node type in the catalog. This is an older copy of [CatalogNodeTypePropertyAdd(Int64, String, String, Boolean, Boolean, Boolean) method. The new method was added to follow the current method naming convention.
CatalogGetLinkTypeProperties	This method gets a list of properties for a link type.
CatalogGetNodeTypeProperties	This method gets a list of properties for a node type.
CatalogLinkCategoryAdd	This method adds a new link category.
CatalogLinkCategoryDelete	This method deletes a link category from the catalog.
CatalogLinkCategoryGet	This method returns a link category.
CatalogLinkCategoryGetByName	This method returns a link category providing its name.
CatalogLinkCategoryUpdate	This method updates the link category in the catalog.
CatalogLinkCategoryUploadImage	This method uploads a new icon image for an existing link category.
CatalogLinkOverrideAdd	This method adds a new override for a link type property.
CatalogLinkOverrideAddListValue	This method adds a new list value for a link type property.
CatalogLinkOverrideDelete	This method deletes a link override (list value) from the catalog.
CatalogLinkOverrideGet	This method returns a link override.
CatalogLinkOverrideGetListValue	This method returns a link override providing its list value and link property id.
CatalogLinkOverridesGetPropertyId	Gets a list of link overrides for a specified link type property.
CatalogLinkOverridesGetTypeId	

Name	Description
	Gets a list of link overrides for all properties of a specified link type.
 CatalogLinkOverrideUpdate	This method updates the link override in the catalog.
 CatalogLinkTypeAdd	This method adds a new link type to the catalog.
 CatalogLinkTypeClone	This method clones an existing link type in the catalog.
 CatalogLinkTypeDelete	This method deletes a link type from the catalog.
 CatalogLinkTypeGet	This method returns a link type.
 CatalogLinkTypeGetByName	This method returns a link type providing its name.
 CatalogLinkTypePropertyAdd	This method adds a new property to an existing link type in the catalog.
 CatalogLinkTypePropertyDelete	This method deletes a link type property from the catalog.
 CatalogLinkTypePropertyGet	This method returns a link type property.
 CatalogLinkTypePropertyGetByName	This method returns a link type property providing its name.
 CatalogLinkTypePropertyUpdate	This method updates the link type property in the catalog.
 CatalogLinkTypeUpdate	This method updates the link type in the catalog.
 CatalogNodeCategoryAdd	This method adds a new node category.
 CatalogNodeCategoryDelete	This method deletes a node category from the catalog.
 CatalogNodeCategoryGet	This method returns a node category.
 CatalogNodeCategoryGetByName	This method returns a node category providing its name.
 CatalogNodeCategoryUpdate	This method updates the node category in the catalog.

Name	Description
 CatalogNodeCategoryUploadImage	This method uploads a new icon image for an existing node category.
 CatalogNodeOverrideAddtd>	This method adds a new override for a node type property.
 CatalogNodeOverrideAddListValue	This method adds a new list value for a node type property.
 CatalogNodeOverrideDelete	This method deletes a node override (list value) from the catalog.
 CatalogNodeOverrideGet	This method returns a node override.
 CatalogNodeOverrideGetByListValue	This method returns a node override providing its list value and node property id.
 CatalogNodeOverridesGetByPropertyId	Gets a list of node overrides for a specified node type property.
 CatalogNodeOverridesGetByTypeId	Gets a list of node overrides for all properties of a specified node type.
 CatalogNodeOverrideUpdate	This method updates the node override in the catalog.
 CatalogNodeOverrideUploadImage	This method uploads a new override image for an existing node override.
 CatalogNodeTypeAdd	This method adds a new node type to the catalog.
 CatalogNodeTypeClone	This method clones an existing node type in the catalog.
 CatalogNodeTypeDelete	This method deletes a node type from the catalog.
 CatalogNodeTypeGet	This method returns a node type.
 CatalogNodeTypeGetByName	This method returns a node type providing its name.
 CatalogNodeTypePropertyAdd	This method adds a new property to an existing node type in the catalog.
 CatalogNodeTypePropertyDelete	This method deletes a node type property from the catalog.

Name	Description
CatalogNodeTypePropertyGet	This method returns a node type property.
CatalogNodeTypePropertyGetByName	This method returns a node type property providing its name.
CatalogNodeTypePropertyUpdate	This method updates the node type property in the catalog.
CatalogNodeTypeUpdate	This method updates the node type in the catalog.
CatalogNodeTypeUploadBackground	This method uploads a new background for an existing node type.
CatalogNodeTypeUploadImage	This method uploads a new image for an existing node type.
CatalogVendorAdd	This method adds a new vendor to the catalog.
CatalogVendorDelete	This method deletes a vendor from the catalog.
CatalogVendorGet	This method gets a vendor from the catalog.
CatalogVendorGetByName	This method gets a vendor by name.
CatalogVendorUpdate	This method updates the specified vendor.
DiagramGetHeight	This method gets the height of a diagram.
DiagramGetLinksByTypeId	This method gets a list of link names providing the type and the diagram.
DiagramGetMarginSize	This method gets the margin size of a diagram.
DiagramGetNodesByTypeGroup	This method gets a dictionary of node ids and names providing the type group and the diagram.
DiagramGetNodesByTypeId	Gets a list of nodes of a selected type on a selected diagram.
DiagramGetWidth	This method gets the width of a diagram.
InstanceMoveToFront	This method moves an instance on a diagram to the front.
InstanceSendToBack	

Name	Description
 LinkBack	This method sends an instance on a diagram to the back.
 LinkDelete	This method deletes a link.
 LinkGetPropertyValue	This method gets the value of a link property.
 LinkGetPropertyValueByName	This method gets the value of a link property passing the property name.
 LinkGetTypeId	This method gets the type id of a link.
 LinkInsert	This method inserts a link with a specific name and of a specific type providing the end nodes.
 LinkPropertyUpdate	This method updates a link property.
 LinkTypeGetId	This method gets the id of the link type providing its name.
 NodeDelete	This method deletes a node.
 NodeGetPropertyValue	This method gets the value of a node property.
 NodeGetPropertyValueByName	This method gets the value of a node property by passing the property name.
 NodeGetTypeGroup	This method gets the type group of a node.
 NodeGetTypeId	This method gets the type id of a node.
 NodeInsert	This method inserts a node with a specific name and of a specific type providing the parent diagram.
 NodePropertyUpdate	This method updates a node property.
 NodeReparent	This method moves a node to another diagram.
 NodeSetCanMove	This method updates the 'CanMove' setting of a visNode based on the node id and diagram id.
 NodeSetHeight	This method sets the height of a visNode based on the node id and diagram id.
 NodeSetWidth	

Name	Description
	This method sets the width of a visNode based on the node id and diagram id.
 NodeSetX	This method sets the X coordinate of the top-left corner of a visNode based on the node id and diagram id.
 NodeSetY	This method sets the Y coordinate of the top-left corner of a visNode based on the node id and diagram id.
 NodesGetByName	Gets a list of nodes with the specified name.
 NodeTypeGetId	This method gets the id of the node type providing its name.
 TestConnection	This method tests the opened channel between the server and the client. This method does nothing unless a problem is detected, in which case it throws a FaultException(TDetail) error, including the problem description.
 VisNodeSetAttribute	This method updates a set of attributes of a visNode based on the node id and diagram id.

4.1.3 See Also

[NetTerrain.WebApi Namespace](#)

4.2 AdminGroupAdd Method

This method adds a new user group.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.2.1 Syntax

C#

```
long AdminGroupAdd(
    string name,
```

```
    Roles role  
)
```

4.2.1.1 Parameters

name

Type: System.String

Group name.

role

Type: [NetTerrain.WebApi.Roles](#)

The role of the group.

4.2.1.2 Return Value

Type: Int64 Returns the id of the newly created group.

4.2.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.2.3 Examples

The following example shows how to add a new user group using the AdminGroupAdd method.

```
try  
{  
    long groupId = api.AdminGroupAdd("Team Lumbergh",  
Roles.PowerUser);  
}  
catch (FaultException<FaultInfo> info)  
{  
    Console.WriteLine(string.Format(  
        "Cannot add group: {0}", info.Detail.Details));  
}
```

4.2.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.3 AdminGroupDelete Method

This method deletes a user group.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.3.1 Syntax

C#

```
void AdminGroupDelete (
    long groupId
)
```

4.3.1.1 Parameters

groupId

Type: System.Int64

The id of the group to delete.

4.3.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.3.3 Remarks

Only non-system groups with no users can be deleted.

4.3.4 Examples

The following example shows how to delete a user group using the AdminGroupDelete method.

```
try
{
    // Get existing group.
    Group group = api.AdminGroupGetByName("Team Lumbergh");

    // Delete the group.
    api.AdminGroupDelete(group.Id);
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot delete group: {0}", info.Detail.Details));
}
```

4.3.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.4 AdminGroupGet Method

This method gets a user group.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.4.1 Syntax

C#

```
Group AdminGroupGet (
    long groupId
)
```

4.4.1.1 Parameters

groupId

Type: System.Int64

Group id.

4.4.1.2 Return Value

Type: [Group](#) Returns the group object.

4.4.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.4.3 Examples

The following example shows how to get a user group using the AdminGroupGet method.

```
try
{
    Group group = api.AdminGroupGet(12000000000018);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(
        string.Format("Cannot get user group: {0}", info.Detail.Details));
}
```

4.4.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.5 AdminGroupGetByName Method

This method gets a user group by name.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.5.1 Syntax

C#

```
Group AdminGroupGetByName (
    string groupName
)
```

4.5.1.1 Parameters

groupName

Type: System.String

Group name.

4.5.1.2 Return Value

Type: [Group](#) Returns the group object.

4.5.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.5.3 Examples

The following example shows how to get a user group using the AdminGroupGetByName method.

```
try
{
    Group group = api.AdminGroupGetByName ("Team Lumbergh");
}
```

```
        catch (FaultException<FaultInfo> info)
    {
        Console.WriteLine(
            string.Format("Cannot get user group: {0}", info.Detail.Details)
        );
    }
}
```

4.5.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.6 AdminGroupUpdate Method

This method updates the user group.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.6.1 Syntax

C#

```
void AdminGroupUpdate(
    Group group
)
```

4.6.1.1 Parameters

group

Type: [NetTerrain.WebApi.Group](#)

Group object with updated data.

4.6.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.6.3 Remarks

To update the user group get the group object, change one or more necessary parameters and then run the update method for this object. The Id parameter should not be changed.

System groups cannot be updated. A non-system group cannot be changed to a system group by setting the IsSystem parameter to true.

When altering the Name parameter (renaming the group) the new name must be unique throughout all groups.

4.6.4 Examples

The following example shows how to update the user group using the AdminGroupUpdate method.

```
try
{
    // Get node type object.
    Group group = api.AdminGroupGetByName("Team Lumbergh");

    // Update group parameters.
    group.Name = "Updated group name";
    group.Role = Roles.Editor;

    // Update the group.
    api.AdminGroupUpdate(group);
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot update the user group: {0}", info.Detail.Details)
    );
}
```

4.6.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.7 AdminUserAdd Method

This method adds a new user.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.7.1 Syntax

C#

```
long AdminUserAdd(  
    string name,  
    bool isAdAccount,  
    bool overrideAdGroup,  
    long groupId,  
    string password,  
    string email,  
    string description,  
    string comments )
```

4.7.1.1 Parameters

name

Type: System.String

User name.

isAdAccount

Type: System.Boolean

If set to true indicates that the user belongs to an Active Directory domain.

overrideAdGroup

Type: System.Boolean

If set to true forces an Active Directory user to use a manually specified Group instead of the one determined by the domain controller. This parameter is ignored for non-Active Directory users.

groupId

Type: System.Int64

Id of the user group. Should always be specified for native users. Ignored for Active Directory users when overrideAdGroup parameter is set to false.

password

Type: System.String

User password. Ignored for Active Directory users.

email

Type: System.String

User email. Ignored for Active Directory users.

description

Type: System.String

User description. Ignored for Active Directory users.

comments

Type: System.String

Additional comments. Ignored for Active Directory users.

4.7.1.2 Return Value

Type: Int64 Returns the id of the newly created user.

4.7.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.7.3 Remarks

When adding an Active Directory user this method requires the name of the user to already exist in the Active Directory domain. New users cannot be added into an Active Directory domain using this method.

4.7.4 Examples

The following example shows how to add a new user using the AdminUserAdd method.

```
try
{
    // Get group for a new native user.
    Group powerUserGroup = api.AdminGroupGetByName ("PowerUser");
```

```

// Add a native user.
long nativeUserId = api.AdminUserAdd(
    "Milton Waddams", false, false, powerUserGroup.Id,
"kj1GleFds$4",
    "Milton@initech.com", "This is a test native user", "");

// Add an Active Directory user.
long adUserId = api.AdminUserAdd(
    "MiltonADUser", true, false, 0, "", "", "", "");

// Add an Active Directory user with group override.
long adUserId2 = api.AdminUserAdd(
    "WaddamsADUser2", true, true, powerUserGroup.Id, "", "", "", "",
");
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot add user: {0}", info.Detail.Details)
    );
}

```

4.7.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.8 AdminUserDelete Method

This method deletes a user.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.8.1 Syntax

C#

```
void AdminUserDelete(
    long userId
)
```

4.8.1.1 Parameters

userId

Type: System.Int64

The id of the user to delete.

4.8.2 Exceptions

Exception	Condition
FaultException<TDetail>	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.8.3 Remarks

Service account used to open this WebApi channel cannot be deleted this way.

4.8.4 Examples

The following example shows how to delete a user using the AdminUserDelete method.

```
try
{
    // Get existing user.
    User user = api.AdminUserGetByName("Nina");

    // Delete the user.
    api.AdminUserDelete(user.Id);
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
```

```
        "Cannot delete user: {0}", info.Detail.Details)
    );
}
```

4.8.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.9 AdminUserGet Method

This method gets a user.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.9.1 Syntax

C#

```
User AdminUserGet(
    long userId
)
```

4.9.1.1 Parameters

userId

Type: System.Int64

User id.

4.9.1.2 Return Value

Type: [User](#) Returns the user object.

4.9.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.9.3 Examples

The following example shows how to get a user using the AdminUserGet method.

```
try
{
    User user = api.AdminUserGet(9400000000132);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get user: {0}", info.Detail.Details)
    );
}
```

4.9.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.10 AdminUserGetByName Method

This method gets a user by name.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.10.1 Syntax

C#

```
User AdminUserGetByName (
    string userName
)
```

4.10.1.1 Parameters

userName

Type: System.String

User name.

4.10.1.2 Return Value

Type: **User** Returns the user object.

4.10.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.10.3 Examples

The following example shows how to get a user using the AdminUserGetByName method.

```
try
{
    User user = api.AdminUserGetByName ("Samir Nagheenajar");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get user: {0}", info.Detail.Details)
    );
}
```

4.10.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.11 AdminUserSetPassword Method

This method changes a user password.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.11.1 Syntax

C#

```
void AdminUserSetPassword(
    long userId,
    string password
)
```

4.11.1.1 Parameters

userId

Type: System.Int64

User id.

password

Type: System.String

New user password.

4.11.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.11.3 Remarks

Password of current service account cannot be changed.

4.11.4 Examples

The following example shows how to change a user password using the AdminUserSetPassword method.

```
try
{
    User user = api.AdminUserGetByName("Michael Bolton");
    api.AdminUserSetPassword(user.Id, "k1Es1DS;3s");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get user: {0}", info.Detail.Details));
}
```

4.11.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.12 AdminUserUpdate Method

This method updates the user.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.12.1 Syntax

C#

```
void AdminUserUpdate(
    User user
)
```

4.12.1.1 Parameters

user

Type: [NetTerrain.WebApi.User](#)

User object with updated data.

4.12.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.12.3 Remarks

To update the user get the user object, change one or more necessary parameters and then run the update method for this object. The Id parameter should not be changed.

User parameters of an Active Directory user stored on the Domain Acontroller cannot be updated.

User Name cannot be changed (user renaming is not possible).

Active Directory status of the user cannot be changed.

For Active Directory users the user group can only be changed if the IsOverrideAdGroup parameter is true.

User 'admin' account and current service user accounts cannot be changed.

4.12.4 Examples

The following example shows how to update the user using the AdminUserUpdate method.

```
try
{
    // Get node type object.
    User user = api.AdminUserGetByName("Bob Slydell");

    // Get group for user update.
    Group editorGroup = api.AdminGroupGetByName("Edit");

    // Update user parameters.
    user.Description = "I am a consultant";
```

```

        user.Comments = "Is this good for the company?";
        user.GroupId = editorGroup.Id;
        user.IsLocked = false;

        // Update the user.
        api.AdminUserUpdate(user);
    }
    catch (FaultException<FaultInfo> info)
    {
        Console.WriteLine(string.Format(
            "Cannot update the user: {0}", info.Detail.Details)
    );
}

```

4.12.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.13 CatalogAddLinkType Method

This method adds a new link type to the catalog. This is an older version of the method. It is advised to use the newer method [CatalogLinkTypeAdd\(String, Boolean\)](#)

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.13.1 Syntax

C#

```

long CatalogAddLinkType(
    string name,
    bool isFavorite,
    float thickness,
    LinkStyles linkStyle
)

```

4.13.1.1 Parameters

name

Type: System.String

Name of the new type. This name must be unique throughout the link type catalog.

isFavorite

Type: System.Boolean

Flag to set the type as a favorite.

thickness

Type: System.Single

Link thickness.

linkStyle

Type: [NetTerrain.WebApi.LinkStyles](#)

Link style value of [LinkStyles](#) enumeration.

4.13.1.2 Return Value

Type: **Int64** Returns the id of the newly created link type.

4.13.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.13.3 Remarks

Link type attributes not specified in the method signature use the following default values:

SnappedToEdge	false
Color	#000000
CategoryId	null
StartArrow	null
EndArrow	null

4.13.4 Examples

The following example shows how to create a new link type using the CatalogAddLinkType method.

```
try
{
    long catalogLinkId = api.CatalogAddLinkType(
        "New Link Type", true, 2, LinkStyles.DashDot);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Cannot create link type: {0}",
        info.Detail.Details));
}
```

4.13.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.14 CatalogAddLinkTypeProperty Method

This method adds a new property to an existing link type in the catalog. This is an older copy of [CatalogLinkTypePropertyAdd\(Int64, String, String, Boolean, Boolean, Boolean\)](#) method. The new method was added to follow method naming convention.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.14.1 Syntax

C#

```
long CatalogAddLinkTypeProperty(
    long linkTypeId,
    string propertyName,
    string defaultValue,
    bool isMandatory,
```

```
    bool isDisplayed,  
    bool isInProperties  
)
```

4.14.1.1 Parameters

linkTypeId

Type: System.Int64

Target link type id.

propertyName

Type: System.String

Name of the new property. Must be unique for properties of this type.

defaultValue

Type: System.String

Default property value.

isMandatory

Type: System.Boolean

Makes the property mandatory if set to true.

isDisplayed

Type: System.Boolean

Makes the property displayed if set to true.

isInProperties

Type: System.Boolean

If set to true, the new property will be displayed in the properties list when a link of this type is selected in the netTerrain project.

4.14.1.2 Return Value

Type: Int64 Returns the id of the created link type property.

4.14.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.14.3 Remarks

Property attributes not specified in the method signature use the following default values:

FontSize	10
FontColor	#000000
FillColor	null

4.14.4 Examples

The following example shows how to add a new link type property using the CatalogAddLinkTypeProperty method.

```
try
{
    long catalogLinkTypePropertyId = api.CatalogAddLinkTypeProperty(
        27000000000164, "Bandwidth", "defValue",
        true, true, true);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot create link type property: {0}",
        info.Detail.Details));
}
```

4.14.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.15 CatalogAddNodeType Method

This method adds a new node type to the catalog. This is an older version of the method. It is advised to use the newer method [CatalogNodeTypeAdd\(String, NodeTypeGroups, String, Boolean\)](#) with better handling of the TypeGroupNumber parameter.

4.15.1 Syntax

C#

```
void CatalogAddNodeType(
    NewNodeTypeInfo parameters
)
```

4.15.1.1 Parameters

parameters

Type: [NetTerrain.WebApi.NewNodeTypeInfo](#)

Parameters of a new node type.

4.15.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.15.3 Remarks

A new node type requires an associated icon image. This image cannot be passed to the server as a usual method parameter; instead it requires a file uploading process. As such, due to the specifics of the WCF service, this method cannot return the id of the created node type. You can retrieve this id in a subsequent method call by using [NodeTypeGetId\(String\)](#) or [CatalogNodeTypeGetByName\(String\)](#).

This method is an older version of the node type addition method and was kept for compatibility purposes. It is advised to use the newer method [CatalogNodeTypeAdd\(String, NodeTypeGroups, String, Boolean\)](#) which sets the node type group based on the [NodeTypeGroups](#) enumeration rather than the TypeGroupNumber int value.

4.15.4 Examples

The following example shows how to add a new node type using the CatalogAddNodeType method.

```
try
{
    FileStream stream = new FileStream(
        @"c:\CiscoSwitchImage.png", FileMode.Open, FileAccess.Read);
    api.CatalogAddNodeType(new NewNodeTypeInfo {
        ImageFileName = "CiscoSwitchImage.png",
        ImageByteStream = stream,
        Name = "Cisco Switch",
        TypeGroupNumber = 1,
        IsEnabled = true,
        IsFavourite = true,
        DefaultHeight = (float)0.5,
        DefaultWidth = (float)0.5
    });

    long typeId = api.NodeTypeGetId("Cisco Switch");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot create node type: {0}", info.Detail.Details));
}
```

4.15.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.16 CatalogAddNodeTypeProperty Method

This method adds a new property to an existing node type in the catalog. This is an older copy of the [CatalogNodeTypePropertyAdd\(Int64, String, String, Boolean, Boolean, Boolean\)](#) method. The new method was added to follow better method naming convention.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.16.1 Syntax

C#

```
long CatalogAddNodeTypeProperty(  
    long nodeId,  
    string propertyName,  
    string defaultValue,  
    bool isMandatory,  
    bool isDisplayed,  
    bool isInProperties  
)
```

4.16.1.1 Parameters

nodeTypeid

Type: System.Int64

The node type id.

propertyName

Type: System.String

Name of the new property. Must be unique for properties of this type.

defaultValue

Type: System.String

Default property value.

isMandatory

Type: System.Boolean

Makes property mandatory if set to true.

isDisplayed

Type: System.Boolean

Makes property displayed if set to true.

isInProperties

Type: System.Boolean

If set to true the new property will be displayed in the properties list when a node of this type is selected on a diagram.

4.16.1.2 Return Value

Type: **Int64** Returns the id of the created node type property.

4.16.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.16.3 Remarks

Property attributes not specified in the method signature use the following default values:

FontSize	10
FontColor	#000000
FillColor	transparent

4.16.4 Examples

The following example shows how to add a new node type property using the CatalogAddNodeTypeProperty method.

```
try
{
    long nodeTypePropertyId = api.CatalogAddNodeTypeProperty(
26000000003247, "IP Address", "127.0.0.0", true, true, true);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot create node type property: {0}", info.Detail.Details));
}
```

4.16.5 See Also

[INetTerrainWebApi Interface](#)

4.17 CatalogGetLinkTypeProperties Method

This method gets a list of properties for a link type.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.17.1 Syntax

C#

```
Dictionary<long, string> CatalogGetLinkTypeProperties(  
    long linkTypeId  
)
```

4.17.1.1 Parameters

linkTypeId

Type: System.Int64

Link type id.

4.17.1.2 Return Value

Type: Dictionary(Int64, String) Returns a dictionary containing 'property id' - 'property name' pairs.

4.17.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.17.3 Remarks

The returned list will at a minimum contain the built-in 'Name' property.

4.17.4 Examples

The following example shows how to retrieve all the properties for the specified link type using the CatalogGetLinkTypeProperties method.

```
try
{
    Dictionary<long, string> list =
    api.CatalogGetLinkTypeProperties(27000000000138);
    foreach (KeyValuePair<long, string> entry in list) {
        Console.WriteLine(string.Format("Property id: {0}, name: {1}",
            entry.Key, entry.Value));
    }
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Cannot get properties list: {0}",
        info.Detail.Details));
}
// The example will return an output such as the following:
// Property id: 29000000039974, name: A port
// Property id: 29000000039973, name: IP Address
// Property id: 29000000039971, name: Name
// Property id: 29000000039972, name: Zippity port
```

4.17.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.18 CatalogGetNodeTypeProperties Method

This method gets a list of properties for a node type.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.18.1 Syntax

C#

```
Dictionary<long, string> CatalogGetNodeTypeProperties(  
    long nodeTypeId  
)
```

4.18.1.1 Parameters

nodeTypeId

Type: System.Int64

Node type id.

4.18.1.2 Return Value

Type: Dictionary(Int64, String) Returns a dictionary containing 'property id' - 'property name' pairs.

4.18.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.18.3 Remarks

The returned list will at a minimum contain the built-in 'Name' property.

4.18.4 Examples

The following example shows how to retrieve all the properties for the specified node type using the CatalogGetNodeTypeProperties method.

```
try  
{  
    Dictionary<long, string> list =  
        api.CatalogGetNodeTypeProperties(26000000004197);  
    foreach (KeyValuePair<long, string> entry in list) {
```

```

        Console.WriteLine(string.Format("Property id: {0}, name: {1}",
            entry.Key, entry.Value));
    }
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Cannot get properties list: {0}",
        info.Detail.Details));
}
// The example outputs something like the following:
// Property id: 28000000006473, name: Address
// Property id: 28000000006472, name: Phone No
// Property id: 28000000006470, name: Name
// Property id: 28000000006471, name: Shoe Size

```

4.18.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.19 CatalogLinkCategoryAdd Method

This method adds a new link category.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.19.1 Syntax

C#

```

long CatalogLinkCategoryAdd(
    string name,
    long parentId,
    string imageFileName,
    bool isFavorite
)

```

4.19.1.1 Parameters

name

Type: System.String

Link category name. This name must be unique throughout the link categories catalog.

parentId

Type: System.Int64

Parent category id. '0' should be used if no parent category required.

imageFileName

Type: System.String

Category icon image file name if the image has already been uploaded to the netTerrain application server.

Must be empty otherwise.

isFavorite

Type: System.Boolean

Flag to set the category as a favorite.

4.19.1.2 Return Value

Type: **Int64** Returns the id of the newly created link category.

4.19.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.19.3 Remarks

To set the category icon image, it should first be uploaded to the netTerrain application separately using the [CatalogLinkCategoryUploadImage\(FileUploadAttributes\)](#) method (see the example). The same image can be used for different categories.

4.19.4 Examples

The following example shows how to add a new link category using the CatalogLinkCategoryAdd method.

```
try
{
    //Add a new category with a parent category (should exist) and
    // default icon image.
    long newCategoryId = api.CatalogLinkCategoryAdd( "Fiber", 0,
string.Empty, true);

    // Create file stream for image upload.
    FileStream stream = new FileStream(
        @"c:\Fiber.jpg", FileMode.Open, FileAccess.Read);

    // Upload the image for the new category.
    api.CatalogLinkCategoryUploadImage(new FileUploadAttributes() {
        FileName = @"Fiber.jpg", FileByteStream = stream, ObjectId =
newCategoryId });

    // Release the stream.
    stream.Dispose();
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot create link category: {0}",
        info.Detail.Details));
}
}
```

4.19.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.20 CatalogLinkCategoryDelete Method

This method deletes a link category from the catalog.

4.20.1 Syntax

C#

```
void CatalogLinkCategoryDelete(
    long linkCategoryId
)
```

4.20.1.1 Parameters

linkCategoryId

Type: System.Int64

Id of the link category to delete.

4.20.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.20.3 Remarks

A link category cannot be deleted if it has any associated link types or any child link categories.

4.20.4 Examples

The following example shows how to delete a category using the CatalogLinkCategoryDelete method.

```
try
{
    // Get existing link category.
    LinkCategory linkCategory =
        api.CatalogLinkCategoryGetByName("Fiber");

    // Delete the link category.
    api.CatalogLinkCategoryDelete(linkCategory.Id);
```

```
        }

    catch (FaultException<FaultInfo> info)
    {
        Console.WriteLine(string.Format(
            "Cannot delete link category: {0}", info.Detail.Details)
        );
    }
}
```

4.20.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.21 CatalogLinkCategoryGet Method

This method returns a link category.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.21.1 Syntax

C#

```
LinkCategory CatalogLinkCategoryGet (
    long linkCategoryId
)
```

4.21.1.1 Parameters

linkCategoryId

Type: System.Int64

Link category id.

4.21.1.2 Return Value

Type: [LinkCategory](#) Returns the link category object.

4.21.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.21.3 Examples

The following example shows how to get a link category using the CatalogLinkCategoryGet method.

```
try
{
    LinkCategory linkCategory =
    api.CatalogLinkCategoryGet(32000000000351);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get link category: {0}",
        info.Detail.Details));
}
```

4.21.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.22 CatalogLinkCategoryGetByName Method

This method returns a link category providing its name.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.22.1 Syntax

C#

```
LinkCategory CatalogLinkCategoryGetByName (
    string linkCategoryName
)
```

4.22.1.1 Parameters

linkCategoryName

Type: System.String

Link category name.

4.22.1.2 Return Value

Type: [LinkCategory](#) Returns the link category object.

4.22.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.22.3 Examples

The following example shows how to get a link category using the CatalogLinkCategoryGetByName method.

```
try
{
    LinkCategory linkCategory =
    api.CatalogLinkCategoryGetByName("Fiber");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get link category: {0}", info.Detail.Details))
```

```
) ;  
}
```

4.22.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.23 CatalogLinkCategoryUpdate Method

This method updates the link category in the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.23.1 Syntax

C#

```
void CatalogLinkCategoryUpdate(  
    LinkCategory linkCategory  
)
```

4.23.1.1 Parameters

linkCategory

Type: [NetTerrain.WebApi.LinkCategory](#)

Link category object with updated data.

4.23.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.23.3 Remarks

To update the link category get the link category object, change one or more necessary parameters and then run the update method for this object. The Id parameter should not be changed.

The type group of the link category cannot be changed.

When altering the Name parameter (renaming the link category) the new name must be unique throughout all link categories.

When changing the ImageFileName parameter, the image file should already exist on the server. The same icon image can be used for different categories. To update the link category icon image with a new image file the [CatalogLinkCategoryUploadImage\(FileUploadAttributes\)](#) method should be used. Use an empty string to remove the icon image.

In case of setting or altering the ParentId parameter (reparenting) the link type group of the new parent link category must coincide with this link category. The new parent category should exist.

4.23.4 Examples

The following example shows how to update the link category using the CatalogLinkCategoryUpdate method.

```
try
{
    // Get link category object.
    LinkCategory linkCategory =
        api.CatalogLinkCategoryGetByName("Fiber");

    // Update link category parameters.
    linkCategory.ImageFileName = "AnotherExistingIcon.jpg";
    linkCategory.IsFavorite = false;
    linkCategory.Name = "Renamed category";
    linkCategory.ParentId = 32000000000005;

    // Update the link category.
    api.CatalogLinkCategoryUpdate(linkCategory);
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot update the link category: {0}", info.Detail.Details))
```

```
) ;  
}
```

4.23.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.24 CatalogLinkCategoryUploadImage Method

This method uploads a new icon image for an existing link category.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.24.1 Syntax

C#

```
void CatalogLinkCategoryUploadImage(  
    FileUploadAttributes fileUploadAttributes  
)
```

4.24.1.1 Parameters

fileUploadAttributes

Type: [NetTerrain.WebApi.FileUploadAttributes](#)

Attributes of a new link category icon image.

4.24.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.24.3 Examples

The following example shows how to upload an image using the CatalogLinkCategoryUploadImage method.

```
try
{
    // Get existing link category.
    LinkCategory linkCategoryToUpdate =
        api.CatalogLinkCategoryGetByName("Fiber");
    FileStream stream = new FileStream(
        @"c:\Fiber.jpg", FileMode.Open, FileAccess.Read);
    api.CatalogLinkCategoryUploadImage(new FileUploadAttributes()
    {
        FileName = "Fiber.jpg",
        FileByteStream = stream,
        ObjectId = linkCategoryToUpdate.Id
    });
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot upload link category image: {0}",
        info.Detail.Details));
}
```

4.25 CatalogLinkOverrideAdd Method

This method adds a new override for the link type property.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.25.1 Syntax

C#

```
long CatalogLinkOverrideAdd(
    long linkPropertyId,
    bool isOverride,
    OverrideRules rule,
```

```
    string listValue,
    string color,
    float thickness,
    LinkStyles linkStyle,
    ArrowStyles startArrow,
    ArrowStyles endArrow )
```

4.25.1.1 Parameters

linkPropertyId

Type: System.Int64

The id of the link type property.

isOverride

Type: System.Boolean

If set to true adds a real override, otherwise adds just a list value.

rule

Type: [NetTerrain.WebApi.OverrideRules](#)

Override rule used for this value.

listValue

Type: System.String

Value for the property's values list.

color

Type: System.String

Color hex code override for a link.

thickness

Type: System.Single

Thickness override for a link.

linkStyle

Type: [NetTerrain.WebApi.LinkStyles](#)

Line style override for a link.

startArrow

Type: [NetTerrain.WebApi.ArrowStyles](#)

Start arrow override for a link.

endArrow

Type: [NetTerrain.WebApi.ArrowStyles](#)

End arrow override for a link.

4.25.1.2 Return Value

Type: [Int64](#) Returns the id of the newly created link override object.

4.25.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.25.3 Examples

The following example shows how to add a new link override using the CatalogLinkOverrideAdd method.

```
try
{
    //Add a new link override '10'.
    long newOverrideId = api.CatalogLinkOverrideAdd(
        29000000000378,
        true,
        OverrideRules.GreaterThan,
        "10",
        "#123456",
        2.8f,
        LinkStyles.DashDot,
        ArrowStyles.Solid,
        ArrowStyles.SolidReversed
    );
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot create link override: {0}",
        info.Detail.Details)
);
}
```

4.25.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.26 CatalogLinkOverrideAddListValue Method

This method adds a new list value for a link type property.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.26.1 Syntax

C#

```
long CatalogLinkOverrideAddListValue(  
    long linkPropertyId,  
    string listView  
)
```

4.26.1.1 Parameters

linkPropertyId

Type: System.Int64

The id of the link type property.

listValue

Type: System.String

Value for the property's values list.

4.26.1.2 Return Value

Type: **Int64** Returns the id of the newly created link override object representing this list value.

4.26.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.26.3 Remarks

A list value can also be viewed as an override entry that does not override anything.

4.26.4 Examples

The following example shows how to add a new link list value using the CatalogLinkOverrideAddListValue method.

```
try
{
    // Add a new list value '10'.
    long newOverrideId = api.CatalogLinkOverrideAddListValue(
        29000000000378, "10"
    );
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot create link list value: {0}",
        info.Detail.Details)
);
}
```

4.26.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.27 CatalogLinkOverrideDelete Method

This method deletes a link override (list value) from the catalog.

4.27.1 Syntax

C#

```
void CatalogLinkOverrideDelete(
    long overrideId
)
```

4.27.1.1 Parameters

overrideId

Type: System.Int64

Id of a link override to delete.

4.27.2 Exceptions

Exception	Condition
FaultException<TDetail>	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.27.3 Remarks

A link override (or a list value) can be deleted even if it is currently active for some links.

4.27.4 Examples

The following example shows how to delete an override using the CatalogLinkOverrideDelete method.

```
try
{
    // Delete the link override.
    api.CatalogLinkOverrideDelete(142);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
```

```
        "Cannot delete link override: {0}",
        info.Detail.Details)
    );
}
```

4.27.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.28 CatalogLinkOverrideGet Method

This method returns a link override.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.28.1 Syntax

C#

```
LinkOverride CatalogLinkOverrideGet (
    long overrideId
)
```

4.28.1.1 Parameters

overrideId

Type: System.Int64

Link override id.

4.28.1.2 Return Value

Type: [LinkOverride](#) Returns the link override object.

4.28.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.28.3 Examples

The following example shows how to get a link override using the CatalogLinkOverrideGet method.

```
try
{
    LinkOverride linkOverride = api.CatalogLinkOverrideGet(142);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get link override: {0}",
        info.Detail.Details));
}
```

4.28.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.29 CatalogLinkOverrideGetByListValue Method

This method returns a link override providing its list value and link property id.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.29.1 Syntax

C#

```
LinkOverride CatalogLinkOverrideGetByListValue(  
    long propertyId,  
    string value  
)
```

4.29.1.1 Parameters

propertyId

Type: System.Int64

Link property id.

value

Type: System.String

List value for this property.

4.29.1.2 Return Value

Type: [LinkOverride](#) Returns the link override object.

4.29.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.29.3 Examples

The following example shows how to get a link override using the CatalogLinkOverrideGetByListValue method.

```
try  
{  
    LinkOverride linkOverride =  
        api.CatalogLinkOverrideGetByListValue(29000000000378, "14");  
}
```

```

    catch (FaultException<FaultInfo> info)
    {
        Console.WriteLine(string.Format(
            "Cannot get link override: {0}",
            info.Detail.Details)
    );
}

```

4.30 CatalogLinkOverridesGetByPropertyId Method

Gets a list of link overrides for a specified link type property.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.30.1 Syntax

C#

```

List<long> CatalogLinkOverridesGetByPropertyId(
    long linkPropertyId
)

```

4.30.1.1 Parameters

linkPropertyId

Type: System.Int64

Link property id.

4.30.1.2 Return Value

Type: [List\(Int64\)](#) Returns a list of override id corresponding to the specified link property.

4.30.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.30.3 Examples

The following example shows how to get the list of link override ids using the CatalogLinkOverridesGetByPropertyId method.

```
try
{
    long[] linkOverrideIds =
api.CatalogLinkOverridesGetByPropertyId(29000000000378);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
        info.Detail.Details));
}
```

4.30.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.31 CatalogLinkOverridesGetByTypeId Method

Gets a list of link overrides for all properties of a specified link type.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.31.1 Syntax

C#

```
List<long> CatalogLinkOverridesGetByTypeId(
    long linkTypeID
)
```

4.31.1.1 Parameters

linkTypeId

Type: System.Int64

Link type id.

4.31.1.2 Return Value

Type: List(Int64) Returns a list of override ids corresponding to properties belonging to the specified link type.

4.31.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.31.3 Examples

The following example shows how to get the list of link override ids using the CatalogLinkOverridesGetByTypeid method.

```
try
{
    long[] linkOverrideIds =
api.CatalogLinkOverridesGetByTypeid(27000000000023);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.31.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.32 CatalogLinkOverrideUpdate Method

This method updates the link override in the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.32.1 Syntax

C#

```
void CatalogLinkOverrideUpdate(
    LinkOverride linkOverride
)
```

4.32.1.1 Parameters

linkOverride

Type: [NetTerrain.WebApi.LinkOverride](#)

Link override object with updated data.

4.32.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.32.3 Remarks

To update the link override get the override object, change one or more necessary parameters and then run the update method for this object. The Id parameter should not be changed.

The link property id cannot be changed.

By altering the IsOverride parameter an override can be transformed into a list value and vice versa.

4.32.4 Examples

The following example shows how to update the link override using the CatalogLinkOverrideUpdate method.

```
try
{
    // Get link override object.
    LinkOverride linkOverride = api.CatalogLinkOverrideGet(143);

    // Update link override parameters.
    linkOverride.Override = true;
    linkOverride.Value = "17";
    linkOverride.Rule = OverrideRules.LowerThan;
    linkOverride.Color = "#111222";
    linkOverride.Thickness = 2;
    linkOverride.LinkStyle = LinkStyles.DashDotDot;
    linkOverride.StartArrow = ArrowStyles.Diamond;
    linkOverride.EndArrow = ArrowStyles.Diamond;

    // Update the link override.
    api.CatalogLinkOverrideUpdate(linkOverride);
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot update the link override: {0}", info.Detail.Details)
    );
}
```

4.32.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.33 CatalogLinkTypeAdd Method

This method adds a new link type to the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.33.1 Syntax

C#

```
long CatalogLinkTypeAdd(  
    string name,  
    bool isFavorite  
)
```

4.33.1.1 Parameters

name

Type: System.String

Link type name. This name must be unique throughout the link types catalog.

isFavorite

Type: System.Boolean

Flag to set the link type as a favorite.

4.33.1.2 Return Value

Type: Int64 Returns the id of the newly created link type.

4.33.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.33.3 Examples

The following example shows how to add a new link type using the CatalogLinkTypeAdd method.

```
try  
{  
    //Add a new link type.  
    long newLinkId = api.CatalogLinkTypeAdd("SONET", true);  
}  
catch (FaultException<FaultInfo> info)
```

```
{  
    Console.WriteLine(string.Format(  
        "Cannot create link type: {0}", info.Detail.Details)  
    );  
}
```

4.34 CatalogLinkTypeClone Method

This method clones an existing link type in the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.34.1 Syntax

C#

```
long CatalogLinkTypeClone(  
    long linkTypeId,  
    string clonedTypeName  
)
```

4.34.1.1 Parameters

linkTypeId

Type: System.Int64

Id of the source link type.

clonedTypeName

Type: System.String

Name of the cloned link type.

4.34.1.2 Return Value

Type: Int64 Returns the cloned link type id.

4.34.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.34.3 Remarks

Only non-system link types can be cloned.

4.34.4 Examples

The following example shows how to clone a link type using the CatalogLinkTypeClone method.

```
try
{
    // Get existing link type.
    LinkType sourceLinkType = api.CatalogLinkTypeGetByName ("MPLS");

    // Clone the link type and change the name to 'Layer 2'.
    long clonedLinkId =
        api.CatalogLinkTypeClone(sourceLinkType.Id, "Layer 2");
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot clone link type: {0}", info.Detail.Details));
}
```

4.34.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.35 CatalogLinkTypeDelete Method

This method deletes a link type from the catalog.

4.35.1 Syntax

C#

```
void CatalogLinkTypeDelete(  
    long linkTypeId  
)
```

4.35.1.1 Parameters

linkTypeId

Type: System.Int64

Id of a link type to delete.

4.35.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.35.3 Remarks

Only non-system link types without associated links can be deleted.

4.35.4 Examples

The following example shows how to delete a link type using the CatalogLinkTypeDelete method.

```
try  
{  
    // Get existing link type.  
    LinkType linkType = api.CatalogLinkTypeGetByName("X.25");  
  
    // Delete the link type.  
    api.CatalogLinkTypeDelete(linkType.Id);  
}
```

```
        catch (FaultException<FaultInfo> info)
    {
        Console.WriteLine(string.Format(
            "Cannot delete link type: {0}", info.Detail.Details)
    );
}
```

4.35.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.36 CatalogLinkTypeGet Method

This method returns a link type.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.36.1 Syntax

C#

```
LinkType CatalogLinkTypeGet (
    long linkTypeId
)
```

4.36.1.1 Parameters

linkTypeId

Type: System.Int64

Link type id.

4.36.1.2 Return Value

Type: [LinkType](#) Returns the link type object.

4.36.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.36.3 Examples

The following example shows how to get a link type using the CatalogLinkTypeGet method.

```
try
{
    LinkType linkType = api.CatalogLinkTypeGet(26000000005732);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get link type: {0}", info.Detail.Details));
}
```

4.36.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.37 CatalogLinkTypeGetByName Method

This method returns a link type providing its name.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.37.1 Syntax

C#

```
LinkType CatalogLinkTypeGetByName (
    string linkTypeName
)
```

4.37.1.1 Parameters

linkTypeName

Type: System.String

Link type name.

4.37.1.2 Return Value

Type: [LinkType](#) Returns the link type object.

4.37.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.37.3 Examples

The following example shows how to get a link type using the CatalogLinkTypeGetByName method.

```
try
{
    LinkType linkType = api.CatalogLinkTypeGetByName ("SONET");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get link type: {0}", info.Detail.Details));
}
```

4.37.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.38 CatalogLinkTypePropertyAdd Method

This method adds a new property to an existing link type in the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.38.1 Syntax

C#

```
long CatalogLinkTypePropertyAdd (
    long linkTypeId,
    string propertyName,
    string defaultValue,
    bool isMandatory,
    bool isDisplayed,
    bool isInProperties
)
```

4.38.1.1 Parameters

linkTypeId

Type: System.Int64

Target link type id.

propertyName

Type: System.String

Name of the new property. Must be unique for properties of this type.

defaultValue

Type: System.String

Default property value.

isMandatory

Type: System.Boolean

Makes the property mandatory if set to true.

isDisplayed

Type: System.Boolean

Makes the property displayed if set to true.

isInProperties

Type: System.Boolean

If set to true, the new property will be displayed in the properties list when a link of this type is selected in the netTerrain project.

4.38.1.2 Return Value

Type: **Int64** Returns the id of the created link type property.

4.38.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.38.3 Remarks

Property attributes not specified in the method signature use the following default values:

FontSize	10
FontColor	#000000
FillColor	null

4.38.4 Examples

The following example shows how to add a new link type property using the CatalogLinkTypePropertyAdd method.

```
try
{
```

```
        long catalogLinkTypePropertyId = api.CatalogLinkTypePropertyAdd(
            270000000000164, "Color", "Red", true, true, true
        );
    }
    catch (FaultException<FaultInfo> info)
    {
        Console.WriteLine(string.Format(
            "Cannot create link type property: {0}", info.Detail.Details)
    );
}
```

4.38.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.39 CatalogLinkTypePropertyDelete Method

This method deletes a link type property from the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.39.1 Syntax

C#

```
void CatalogLinkTypePropertyDelete(
    long linkTypePropertyId
)
```

4.39.1.1 Parameters

linkTypePropertyId

Type: System.Int64

Id of the link type property to delete.

4.39.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.39.3 Remarks

Only non-system link type properties can be deleted.

4.39.4 Examples

The following example shows how to delete a link type property using the CatalogLinkTypePropertyDelete method.

```
try
{
    // Get existing link type property.
    LinkTypeProperty linkTypeProperty =
        api.CatalogLinkTypePropertyGetByName(
            "Color", 27000000000077
        );

    // Delete the link type property.
    api.CatalogLinkTypePropertyDelete(linkTypeProperty.Id);
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot delete link type property: {0}", info.Detail.Details)
    );
}
```

4.40 CatalogLinkTypePropertyGet Method

This method returns a link type property.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.40.1 Syntax

C#

```
LinkTypeProperty CatalogLinkTypePropertyGet (
    long linkTypePropertyId
)
```

4.40.1.1 Parameters

linkTypePropertyId

Type: System.Int64

Link type property id.

4.40.1.2 Return Value

Type: [LinkTypeProperty](#) Returns the link type property object.

4.40.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.40.3 Examples

The following example shows how to get a link type properties using the CatalogLinkTypePropertyGet method.

```
try
{
    LinkTypeProperty linkTypeProperty =
    api.CatalogLinkTypePropertyGet(29000000000385);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get link type property: {0}", info.Detail.Details))
```

```
) ;  
}
```

4.40.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.41 CatalogLinkTypePropertyGetByName Method

This method returns a link type property providing its name.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.41.1 Syntax

C#

```
LinkTypeProperty CatalogLinkTypePropertyGetByName (  
    string name,  
    long linkTypeId  
)
```

4.41.1.1 Parameters

name

Type: System.String

Link type property name.

linkTypeId

Type: System.Int64

4.41.1.2 Return Value

Type: [LinkTypeProperty](#) Returns the link type property object.

4.41.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.41.3 Examples

The following example shows how to get a link type property using the CatalogLinkTypePropertyGetByName method.

```
try
{
    LinkTypeProperty linkTypeProperty =
    api.CatalogLinkTypePropertyGetByName(
        "Color", 2700000000077
    );
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get link type property: {0}", info.Detail.Details)
    );
}
```

4.42 CatalogLinkTypePropertyUpdate Method

This method updates the link type property in the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.42.1 Syntax

C#

```
void CatalogLinkTypePropertyUpdate(
    LinkTypeProperty linkTypeProperty
)
```

4.42.1.1 Parameters

linkTypeProperty

Type: [NetTerrain.WebApi.LinkTypeProperty](#)

Link type property object with updated data.

4.42.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.42.3 Remarks

To update the link type property get the link type property object, change one or more necessary parameters and then run the update method for this object. The Id parameter should not be changed.

The Link type id cannot be changed.

When altering the Name parameter (renaming the link type property) the new name must be unique. Only non-system properties can be renamed.

System status of a property cannot be changed. The following parameters of system properties cannot be changed: Name, IsInProperties, Mandatory, LockList, Position.

The IsTypeField parameter cannot be changed. For type fields the following parameters cannot be changed: DefaultValue, IsUniqueForThisType, IsUniqueForAllTypes.

The LockList parameter cannot be set to 'true' if a property does not have any list values.

4.42.4 Examples

The following example shows how to update the link type property using the CatalogLinkTypePropertyUpdate method.

```
try
{
    // Get link type property object.
    LinkTypeProperty linkTypeProperty =
        api.CatalogLinkTypePropertyGet(29000000000385);
```

```

// Update link type parameters.
linkTypeProperty.Name = "Color";
linkTypeProperty.Angle = 20;
linkTypeProperty.Bold = true;
linkTypeProperty.DefaultValue = "Red";
linkTypeProperty.Displayed = true;
linkTypeProperty.FillColor = "#123123";
linkTypeProperty.FontColor = "#321321";
linkTypeProperty.FontFamily = FontFamilies.LucidaConsole;
linkTypeProperty.FontSize = 12;
linkTypeProperty.IsInProperties = true;
linkTypeProperty.IsUniqueForAllTypes = false;
linkTypeProperty.IsUniqueForThisType = false;
linkTypeProperty.Italic = false;
linkTypeProperty.Justification = TextJustification.Center;
linkTypeProperty.LockList = false;
linkTypeProperty.OffsetX = 0;
linkTypeProperty.OffsetY = 0;
linkTypeProperty.Position = 3;
linkTypeProperty.TextAlign = TextAligns.Center;
linkTypeProperty.Underline = false;

// Update the link type.
api.CatalogLinkTypePropertyUpdate(linkTypeProperty);
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot update the link type: {0}", info.Detail.Details)
);
}

```

4.42.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.43 CatalogLinkTypeUpdate Method

This method updates the link type in the catalog.

4.43.1 Syntax

C#

```
void CatalogLinkTypeUpdate( LinkType linkType )
```

4.43.1.1 Parameters

linkType

Type: [NetTerrain.WebApi.LinkType](#)

Link type object with updated data.

4.43.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.43.3 Remarks

To update the link type get the link type object, change one or more necessary parameters and then run the update method for this object. The Id parameter should not be changed.

System link types cannot be updated. The IsSystem parameter cannot be altered either.

When altering the Name parameter (renaming the link type) the new name must be unique.

A favorite link type or a link type with existing link instances cannot be disabled.

4.43.4 Examples

The following example shows how to update the link type using the CatalogLinkTypeUpdate method.

```
try
{
    // Get link type object.
    LinkType linkType = api.CatalogLinkTypeGetByName("Fiber");
```

```

// Update link type parameters.
linkType.Name = "Copper";
linkType.IsFavorite = true;
linkType.CategoryId = 32000000000003;
linkType.Color = "#123123";
linkType.LinkStyle = LinkStyles.Dot;
linkType.StartArrow = ArrowStyles.Open;
linkType.EndArrow = ArrowStyles.OpenReversed;
linkType.Thickness = 2.5f;
linkType.IsSnappedToEdge = true;
linkType.IsMatchningPortConnectors = false;

// Update the link type.
api.CatalogLinkTypeUpdate(linkType);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot update the link type: {0}", info.Detail.Details)
    );
}

```

4.43.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.44 CatalogNodeCategoryAdd Method

This method adds a new node category.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.44.1 Syntax

C#

```

long CatalogNodeCategoryAdd(
    string name,

```

```
NodeTypeGroups typeGroup,  
long parentId,  
string imageName,  
bool isFavorite )
```

4.44.1.1 Parameters

name

Type: System.String

Node category name. This name must be unique throughout the node categories catalog.

typeGroup

Type: [NetTerrain.WebApi.NodeTypeGroups](#)

Node type group value.

parentId

Type: System.Int64

Parent category id. '0' should be used if no parent category is required.

imageName

Type: System.String

Category icon image file name for an image already uploaded to the netTerrain application server. Should be empty in all other instances.

isFavorite

Type: System.Boolean

Flag to set the category as a favorite.

4.44.1.2 Return Value

Type: [Int64](#) Returns the id of the newly created node category.

4.44.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.44.3 Remarks

To set category icon image the image should be uploaded to the netTerrain application separately with the [CatalogNodeCategoryUploadImage\(FileUploadAttributes\)](#) method (see the example). Alternatively a previously uploaded category icon image can be used if its name is known. The same image can be used for different categories.

4.44.4 Examples

The following example shows how to add a new node category using the [CatalogNodeCategoryAdd](#) method.

```
try
{
    //Add a new category with a parent category (should exist) and
    // default icon image.
    long newCategoryId = api.CatalogNodeCategoryAdd(  "Switches",
NodeTypeGroups.Device,  0,  string.Empty,  true);

    // Create file stream for image upload.
    FileStream stream = new FileStream(
        @"c:\Switch.jpg", FileMode.Open, FileAccess.Read);

    // Upload the image for the new category.
    api.CatalogNodeCategoryUploadImage(new FileUploadAttributes()  {
        FileName = @"Switch.jpg",
        FileStream = stream,  ObjectId = newCategoryId  });

    // Release the stream.
    stream.Dispose();
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot create node category: {0}", info.Detail.Details));
}
```

4.44.5 See Also

[INetTerrainWebApi Interface](#)

4.45 CatalogNodeCategoryDelete Method

This method deletes a node category from the catalog.

Namespace: NetTerrain.WebApi Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.45.1 Syntax

C#

```
void CatalogNodeCategoryDelete(  
    long nodeCategoryId )
```

4.45.1.1 Parameters

nodeCategoryId

Type: System.Int64

If of a node category to delete.

4.45.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.45.3 Remarks

A node category cannot be deleted if it has any associated node type or any child node category.

4.45.4 Examples

The following example shows how to delete a category using the CatalogNodeCategoryDelete method.

```
try  
{  
    // Get existing node category.
```

```
    NodeCategory nodeCategory =
        api.CatalogNodeCategoryGetByName ("Switches") ;

        // Delete the node category.
        api.CatalogNodeCategoryDelete (nodeCategory.Id) ;
    }
    catch (FaultException<FaultInfo> info)
    {
        Console.WriteLine(string.Format (
            "Cannot delete node category: {0}", info.Detail.Details)
        );
    }
}
```

4.45.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.46 CatalogNodeCategoryGet Method

This method returns a node category.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.46.1 Syntax

C#

```
NodeCategory CatalogNodeCategoryGet (
    long nodeCategoryId )
```

4.46.1.1 Parameters

nodeCategoryId

Type: System.Int64

Node category id.

4.46.1.2 Return Value

Type: [NodeCategory](#) Returns the node category object.

4.46.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.46.3 Examples

The following example shows how to get a node category using the CatalogNodeCategoryGet method.

```
try
{
    NodeCategory nodeCategory =
api.CatalogNodeCategoryGet(31000000000351);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get node category: {0}", info.Detail.Details));
}
```

4.46.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.47 CatalogNodeCategoryGetByName Method

This method returns a node category providing its name.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.47.1 Syntax

C#

```
NodeCategory CatalogNodeCategoryGetByName (
    string nodeCategoryName )
```

4.47.1.1 Parameters

nodeCategoryName

Type: System.String

Node category name.

4.47.1.2 Return Value

Type: [NodeCategory](#) Returns the node category object.

4.47.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.47.3 Examples

The following example shows how to get a node category using the CatalogNodeCategoryGetByName method.

```
try
{
    NodeCategory nodeCategory =
api.CatalogNodeCategoryGetByName ("Switches");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine (string.Format (
        "Cannot get node category: {0}", info.Detail.Details))
```

```
) ;  
}
```

4.47.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.48 CatalogNodeCategoryUpdate Method

This method updates the node category in the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.48.1 Syntax

C#

```
void CatalogNodeCategoryUpdate(  
    NodeCategory nodeCategory  
)
```

4.48.1.1 Parameters

nodeCategory

Type: [NetTerrain.WebApi.NodeCategory](#)

Node category object with updated data.

4.48.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.48.3 Remarks

To update the node category get the node category object, change one or more necessary parameters and then run the update method for this object. The Id parameter should not be changed.

The type group of the node category cannot be changed.

When altering the Name parameter (renaming the node category) the new name must be unique in the catalog of node categories.

When changing the ImageFileName parameter the image file should already exist on the server. The same icon image can be used for different categories. To update the node category icon image with a new image file the [CatalogNodeCategoryUploadImage\(FileUploadAttributes\)](#) method should be used. Use an empty string to remove the icon image.

To set or alter the ParentId parameter (reparenting) the node type group of the new parent node category must coincide with this node category. The new parent category should exist.

4.48.4 Examples

The following example shows how to update the node category using the CatalogNodeCategoryUpdate method.

```
try
{
    // Get node category object.
    NodeCategory nodeCategory =
        api.CatalogNodeCategoryGetByName("Cooling Equipment");

    // Update node category parameters.
    nodeCategory.ImageFileName = "Cooling.jpg";
    nodeCategory.IsFavorite = false;
    nodeCategory.Name = "Cooling";
    nodeCategory.ParentId = 31000000000005;

    // Update the node category.
    api.CatalogNodeCategoryUpdate(nodeCategory);
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot update the node category: {0}", info.Detail.Details))
```

```
) ;  
}
```

4.48.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.49 CatalogNodeCategoryUploadImage Method

This method uploads a new icon image for an existing node category.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.49.1 Syntax

C#

```
void CatalogNodeCategoryUploadImage(  
    FileUploadAttributes fileUploadAttributes  
)
```

4.49.1.1 Parameters

fileUploadAttributes

Type: [NetTerrain.WebApi.FileUploadAttributes](#)

Attributes of a new node category icon image.

4.49.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.49.3 Examples

The following example shows how to upload an image using the CatalogNodeCategoryUploadImage method.

```
try
{
    // Get existing node category.
    NodeCategory nodeCategoryToUpdate =
        api.CatalogNodeCategoryGetByName("Cooling");

    FileStream stream = new FileStream(
        @"c:\Cooling.jpg", FileMode.Open, FileAccess.Read);
    api.CatalogNodeCategoryUploadImage(new FileUploadAttributes()
    {
        FileName = "Cooling.jpg",
        FileByteStream = stream,
        ObjectId = nodeCategoryToUpdate.Id
    });
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot upload node category image: {0}", info.Detail.Details));
}
```

4.50 CatalogNodeOverrideAdd Method

This method adds a new override for a node type property.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.50.1 Syntax

C#

```
long CatalogNodeOverrideAdd(
    long nodePropertyId,
```

```
bool isOverride,  
OverrideRules rule,  
string listView,  
string imageFileName )
```

4.50.1.1 Parameters

nodePropertyId

Type: System.Int64

The id of the node type property.

isOverride

Type: System.Boolean

If set to true adds a real override, otherwise adds a list value.

rule

Type: [NetTerrain.WebApi.OverrideRules](#)

Override rule used for this value.

listValue

Type: System.String

Value for the property.

imageFileName

Type: System.String

Override icon image file name if the image has already been uploaded to netTerrain application. Should be empty in all other instances.

4.50.1.2 Return Value

Type: **Int64** Returns the id of the newly created node override object.

4.50.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.50.3 Remarks

To set the node override icon image the image should be uploaded to the netTerrain application separately with the [CatalogNodeOverrideUploadImage\(FileUploadAttributes\)](#) method (see the example). Alternatively a previously uploaded override image can be used if its name is known. The same image can be used for different overrides.

4.50.4 Examples

The following example shows how to add a new node override using the CatalogNodeOverrideAdd method.

```
try
{
    //Add a new node override '10'.
    long newOverrideId = api.CatalogNodeOverrideAdd( 28000000022124,
        true, OverrideRules.GreaterThan, "10", "");

    // Create file stream for image upload.
    FileStream stream = new FileStream(
        @"c:\OverrideImage.jpg", FileMode.Open, FileAccess.Read);

    // Upload the image for the new override.
    api.CatalogNodeOverrideUploadImage(new FileUploadAttributes() {
        FileName = @"OverrideImage.jpg",
        FileByteStream = stream, ObjectId = newOverrideId
    });

    // Release the stream.
    stream.Dispose();
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot create node override: {0}", info.Detail.Details));
}
```

4.50.5 See Also

[INetTerrainWebApi Interface](#)

4.51 CatalogNodeOverrideAddListValue Method

This method adds a new list value for a node type property.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.51.1 Syntax

C#

```
long CatalogNodeOverrideAddListValue(  
    long nodePropertyId,  
    string listView )
```

4.51.1.1 Parameters

nodePropertyId

Type: System.Int64

The id of the node type property.

listValue

Type: System.String

Value for the property.

4.51.1.2 Return Value

Type: **Int64** Returns the id of the newly created node override object representing this list value.

4.51.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.51.3 Remarks

A List value can be interpreted as an override item that does not override anything.

4.51.4 Examples

The following example shows how to add a new node list value using the CatalogNodeOverrideAddListValue method.

```
try
{
    // Add a new list value '10'.
    long newOverrideId = api.CatalogNodeOverrideAddListValue(
28000000022124, "10");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot create node list value: {0}", info.Detail.Details));
}
```

4.51.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.52 CatalogNodeOverrideDelete Method

This method deletes a node override (list value) from the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.52.1 Syntax

C#

```
void CatalogNodeOverrideDelete(
    long overrideId )
```

4.52.1.1 Parameters

overrideId

Type: System.Int64

Id of a node override to delete.

4.52.2 Exceptions

Exception	Condition
FaultException<TDetail>	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.52.3 Remarks

A node override (or a list value) can be deleted even if it is currently active for some nodes.

4.52.4 Examples

The following example shows how to delete an override using the CatalogNodeOverrideDelete method.

```
try
{
    // Delete the node override.
    api.CatalogNodeOverrideDelete(516);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot delete node override: {0}", info.Detail.Details)
    );
}
```

4.52.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.53 CatalogNodeOverrideGet Method

This method returns a node override.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.53.1 Syntax

C#

```
NodeOverride CatalogNodeOverrideGet (
    long overrideId
)
```

4.53.1.1 Parameters

overrideId

Type: System.Int64

Node override id.

4.53.1.2 Return Value

Type: [NodeOverride](#) Returns the node override object.

4.53.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.53.3 Examples

The following example shows how to get a node override using the CatalogNodeOverrideGet method.

```
try
{
    NodeOverride nodeOverride = api.CatalogNodeOverrideGet(516);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get node override: {0}", info.Detail.Details));
}
```

4.53.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.54 CatalogNodeOverrideGetByListValue Method

This method returns a node override providing its list value and node property id.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.54.1 Syntax

C#

```
NodeOverride CatalogNodeOverrideGetByListValue(
    long propertyId,
    string value
)
```

4.54.1.1 Parameters

propertyId

Type: System.Int64

Node property id.

value

Type: System.String

List value for this property.

4.54.1.2 Return Value

Type: [NodeOverride](#) Returns the node override object.

4.54.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.54.3 Examples

The following example shows how to get a node override using the CatalogNodeOverrideGetByListValue method.

```
try
{
    NodeOverride nodeOverride =
    api.CatalogNodeOverrideGetByListValue(28000000022124, "10");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get node override: {0}", info.Detail.Details));
}
```

4.55 CatalogNodeOverridesGetByPropertyId Method

Gets a list of node overrides for a specified node type property.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.55.1 Syntax

C#

```
List<long> CatalogNodeOverridesGetByPropertyId(  
    long nodePropertyId  
)
```

4.55.1.1 Parameters

nodePropertyId

Type: System.Int64

Node property id.

4.55.1.2 Return Value

Type: [List\(Int64\)](#) Returns a list of override ids corresponding to the specified node property.

4.55.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.55.3 Examples

The following example shows how to get the list of node override ids using the CatalogNodeOverridesGetByPropertyId method.

```
try  
{  
    long[] nodeOverrideIds =
```

```
        api.CatalogNodeOverridesGetByPropertyId(28000000022124);  
    }  
    catch (FaultException<FaultInfo> info)  
    {  
        Console.WriteLine(string.Format("Error: {0}",  
            info.Detail.Details));  
    }  
}
```

4.55.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.56 CatalogNodeOverridesGetByTypeId Method

Gets a list of node overrides for all properties of a specified node type.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.56.1 Syntax

C#

```
List<long> CatalogNodeOverridesGetByTypeId(  
    long nodeId  
)
```

4.56.1.1 Parameters

nodeTypeid

Type: System.Int64

Node type id.

4.56.1.2 Return Value

Type: [List\(Int64\)](#) Returns a list of override ids corresponding to properties belonging to the specified node type.

4.56.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.56.3 Examples

The following example shows how to get the list of node override ids using the CatalogNodeOverridesGetByTypeid method.

```
try
{
    long[] nodeOverrideIds =
api.CatalogNodeOverridesGetByTypeid(26000000003376);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.56.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.57 CatalogNodeOverrideUpdate Method

This method updates a node override in the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.57.1 Syntax

C#

```
void CatalogNodeOverrideUpdate(  
    NodeOverride nodeOverride  
)
```

4.57.1.1 Parameters

nodeOverride

Type: [NetTerrain.WebApi.NodeOverride](#)

Node override object with updated data.

4.57.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.57.3 Remarks

To update the node override get the override object, change one or more necessary parameters and then run the update method for this object. The Id parameter should not be changed.

The node property id cannot be changed.

By altering the IsOverride parameter an override can be changed to a list value and vice versa.

When changing the ImageFileName parameter the image file should already exist on the server. The same image can be used for different overrides. To update the node override image with a new image the file [CatalogNodeOverrideUploadImage\(FileUploadAttributes\)](#) method should be used.

4.57.4 Examples

The following example shows how to update the node override using the CatalogNodeOverrideUpdate method.

```
try
{
    // Get node override object.
    NodeOverride nodeOverride = api.CatalogNodeOverrideGet(516);

    // Update node override parameters.
    nodeOverride.ImageFileName = "anotherOverrideImage.png";
    nodeOverride.IsOverride = true;
    nodeOverride.Value = "12";
    nodeOverride.Rule = OverrideRules.Equals;
    nodeOverride.InstanceEffect =
    InstanceEffects.GreenTriangleIndicator;
    nodeOverride.ParentEffect =
    InstanceEffects.OrangeTriangleIndicator;
    nodeOverride.UpwardsPropagation = UpwardsPropagations.ParentOnly;

    // Update the node override.
    api.CatalogNodeOverrideUpdate(nodeOverride);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(
        string.Format("Cannot update the node override: {0}",
        info.Detail.Details));
}
```

4.57.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.58 CatalogNodeOverrideUploadImage Method

This method uploads a new override image for an existing node override.

4.58.1 Syntax

C#

```
void CatalogNodeOverrideUploadImage(
    FileUploadAttributes fileUploadAttributes
)
```

4.58.1.1 Parameters

fileUploadAttributes

Type: [NetTerrain.WebApi.FileUploadAttributes](#)

Attributes of a new node override icon image.

4.58.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.58.3 Examples

The following example shows how to upload an image using the CatalogNodeOverrideUploadImage method.

```
try
{
    // Get existing node override.
    NodeOverride nodeOverrideToUpdate =
        api.CatalogNodeOverrideGet(516);
    FileStream stream = new FileStream(
        @"c:\Green.jpg", FileMode.Open, FileAccess.Read);
    api.CatalogNodeOverrideUploadImage(
        new FileUploadAttributes() {
            FileName = "Green.jpg",
            FileByteStream = stream, ObjectId = nodeOverrideToUpdate.Id
        });
}
```

```
        }

    catch (FaultException<FaultInfo> info)
    {
        Console.WriteLine(string.Format(
            "Cannot upload node override image: {0}", info.Detail.Details)
        );
    }
}
```

4.59 CatalogNodeTypeAdd Method

This method adds a new node type to the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.59.1 Syntax

C#

```
long CatalogNodeTypeAdd(
    string name,
    NodeTypeGroups typeGroup,
    string imageFileName,
    bool isFavorite
)
```

4.59.1.1 Parameters

name

Type: System.String

Node type name. This name must be unique throughout the node types catalog.

typeGroup

Type: [NetTerrain.WebApi.NodeTypeGroups](#)

Node type group value.

imageFileName

Type: System.String

Node type icon image file name if the image has already been uploaded to netTerrain application server.

Should be empty for all other instances.

isFavorite

Type: System.Boolean

Flag to set the node type as a favorite.

4.59.1.2 Return Value

Type: Int64 Returns the id of the newly created node type.

4.59.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.59.3 Remarks

It is only possible to add node types of following type groups: Node, Device, Rack, Card.

4.59.4 Examples

The following example shows how to add a new node type using the CatalogNodeTypeAdd method.

```
try
{
    //Add a new node type.
    long newNodeTypeId = api.CatalogNodeTypeAdd( "Buildings",
    NodeTypeGroups.Device, string.Empty, true);

    // Create file stream for image upload.
    FileStream stream = new FileStream(
        @"c:\Building.jpg", FileMode.Open, FileAccess.Read);

    // Upload the image for the new category.
    api.CatalogNodeTypeUploadImage(new FileUploadAttributes1() {
        FileName = @"Building.jpg",
        FileByteStream = stream, ObjectId = newNodeTypeId
    });
}

// Release the stream.
```

```
        stream.Dispose();
    }
    catch (FaultException<FaultInfo> info)
    {
        Console.WriteLine(string.Format(
            "Cannot create node type: {0}", info.Detail.Details));
    };
}
```

4.59.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.60 CatalogNodeTypeClone Method

This method clones an existing node type in the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.60.1 Syntax

C#

```
long CatalogNodeTypeClone(
    long nodeTypeId,
    string clonedTypeName
)
```

4.60.1.1 Parameters

nodeTypId

Type: System.Int64

Id of the source node type.

clonedTypeName

Type: System.String

Name of the cloned node type.

4.60.1.2 Return Value

Type: **Int64** Returns the cloned node type id.

4.60.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.60.3 Remarks

Only non-system node types can be cloned.

4.60.4 Examples

The following example shows how to clone a node type using the CatalogNodeTypeClone method.

```
try
{
    // Get existing node type.
    NodeType sourceNodeType = api.CatalogNodeTypeGetByName("Floors");

    // Clone the node type and give it name 'Cloned Type'.
    long clonedNodeType = 
        api.CatalogNodeTypeClone(sourceNodeType.Id, "Rooms");
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot clone node type: {0}", info.Detail.Details));
}
```

4.60.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.61 CatalogNodeTypeDelete Method

This method deletes a node type from the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.61.1 Syntax

C#

```
void CatalogNodeTypeDelete(
    long nodeId
)
```

4.61.1.1 Parameters

nodeType

Type: System.Int64

Id of a node type to delete.

4.61.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.61.3 Remarks

Only non-system node types without associated nodes can be deleted.

4.61.4 Examples

The following example shows how to delete a node type using the CatalogNodeTypeDelete method.

```
try
{
    // Get node type.
    NodeType.nodeType = api.CatalogNodeTypeGetByName("Floors");
```

```
// Delete the node type.  
api.CatalogNodeTypeDelete(nodeType.Id);  
}  
catch (FaultException<FaultInfo> info)  
{  
    Console.WriteLine(string.Format(  
        "Cannot delete node type: {0}", info.Detail.Details)  
    );  
}
```

4.61.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.62 CatalogNodeTypeGet Method

This method returns a node type.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.62.1 Syntax

C#

```
NodeType CatalogNodeTypeGet(  
    long nodeTypeId  
)
```

4.62.1.1 Parameters

nodeTypeId

Type: System.Int64

Node type id.

4.62.1.2 Return Value

Type: [NodeType](#) Returns the node type object.

4.62.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.62.3 Examples

The following example shows how to get a node type using the CatalogNodeTypeGet method.

```
try
{
    NodeType.nodeType = api.CatalogNodeTypeGet(26000000005732);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get node type: {0}", info.Detail.Details));
}
```

4.62.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.63 CatalogNodeTypeGetByName Method

This method returns a node type providing its name.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.63.1 Syntax

C#

```
NodeType CatalogNodeTypeGetByName (
    string nodeTypeName
)
```

4.63.1.1 Parameters

nodeTypeName

Type: System.String

Node type name.

4.63.1.2 Return Value

Type: [NodeType](#) Returns the node type object.

4.63.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.63.3 Examples

The following example shows how to get a node type using the CatalogNodeTypeGetByName method.

```
try
{
    NodeType nodeType = api.CatalogNodeTypeGetByName ("Towers");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format (
        "Cannot get node type: {0}", info.Detail.Details)
    );
}
```

4.63.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.64 CatalogNodeTypePropertyAdd Method

This method adds a new property to an existing node type in the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.64.1 Syntax

C#

```
long CatalogNodeTypePropertyAdd (
    long nodeTypeId,
    string propertyName,
    string defaultValue,
    bool isMandatory,
    bool isDisplayed,
    bool isInProperties )
```

4.64.1.1 Parameters

nodeTypeId

Type: System.Int64

The node type id.

propertyName

Type: System.String

The name of the new property. Must be unique for properties of this type.

defaultValue

Type: System.String

Default property value.

isMandatory

Type: System.Boolean

Makes the property mandatory if set to true.

isDisplayed

Type: System.Boolean

Makes the property displayed if set to true.

isInProperties

Type: System.Boolean

If set to true the new property will be displayed in the properties list when a node of this type is selected on a diagram.

4.64.1.2 Return Value

Type: Int64 Returns the id of the created node type property.

4.64.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.64.3 Remarks

Property attributes not specified in the method signature use the following default values:

FontSize	10
FontColor	#000000
FillColor	transparent

4.64.4 Examples

The following example shows how to add a new node type property using the CatalogNodeTypePropertyAdd method.

```
try
{
    long.nodeTypePropertyId = api.CatalogNodeTypePropertyAdd(
26000000003247, "Diameter", "10", true, true, true);
}
catch (FaultException<FaultInfo> info)
```

```
{  
    Console.WriteLine(string.Format(  
        "Cannot create node type property: {0}", info.Detail.Details)  
    );  
}
```

4.64.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.65 CatalogNodeTypePropertyDelete Method

This method deletes a node type property from the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.65.1 Syntax

C#

```
void CatalogNodeTypePropertyDelete(  
    long nodeTypePropertyId  
)
```

4.65.1.1 Parameters

nodeTypePropertyId

Type: System.Int64

Id of a node type property to delete.

4.65.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.65.3 Remarks

Only non-system node type properties can be deleted.

4.65.4 Examples

The following example shows how to delete a node type property using the CatalogNodeTypePropertyDelete method.

```
try
{
    // Get node type property.
    NodeTypeProperty nodeTypeProperty =
        api.CatalogNodeTypePropertyGetByName( "Depth",      26000000003382 );

    // Delete the node type property.
    api.CatalogNodeTypePropertyDelete(nodeTypeProperty.Id);
}

catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot delete node type property: {0}", info.Detail.Details));
}
```

4.66 CatalogNodeTypePropertyGet Method

This method returns a node type property.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.66.1 Syntax

C#

```
NodeTypeProperty CatalogNodeTypePropertyGet (
    long nodeTypePropertyId
)
```

4.66.1.1 Parameters

nodeTypePropertyId

Type: System.Int64

Node type property id.

4.66.1.2 Return Value

Type: [NodeTypeProperty](#) Returns the node type property object.

4.66.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.66.3 Examples

The following example shows how to get a node type properties using the CatalogNodeTypePropertyGet method.

```
try
{
    NodeTypeProperty nodeTypeProperty =
    api.CatalogNodeTypePropertyGet(28000000022144);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get node type property: {0}", info.Detail.Details));
}
```

4.66.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.67 CatalogNodeTypePropertyGetByName Method

This method returns a node type property providing its name.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.67.1 Syntax

C#

```
NodeTypeProperty CatalogNodeTypePropertyGetByName (
    string name,
    long nodeTypeID
)
```

4.67.1.1 Parameters

name

Type: System.String

Node type property name.

nodeTypeID

Type: System.Int64

Id of a node type the property belongs to.

4.67.1.2 Return Value

Type: [NodeTypeProperty](#) Returns the node type property object.

4.67.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.67.3 Examples

The following example shows how to get a node type property using the CatalogNodeTypePropertyGetByName method.

```
try
{
    NodeTypeProperty nodeTypeProperty =
api.CatalogNodeTypePropertyGetByName( "Density", 26000000003382 );
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get node type property: {0}", info.Detail.Details)
);
}
```

4.68 CatalogNodeTypePropertyUpdate Method

This method updates the node type property in the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.68.1 Syntax

C#

```
void CatalogNodeTypePropertyUpdate(
    NodeTypeProperty nodeTypeProperty
)
```

4.68.1.1 Parameters

nodeTypeProperty

Type: [NetTerrain.WebApi.NodeTypeProperty](#)

Node type property object with updated data.

4.68.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.68.3 Remarks

To update the node type property get the node type property object, change one or more necessary parameters and then run the update method for this object. The Id parameter should not be changed.

The node type field cannot be altered if the NotEditable parameter is true.

The node type id cannot be changed.

When altering the Name parameter (renaming the node type property) the new name must be unique. Only non-system properties can be renamed.

The system status of a property cannot be changed. The following parameters of system properties cannot be changed: Name, IsInProperties, Mandatory, LockList, Position.

The IsTypeField parameter cannot be changed. For type fields the following parameters cannot be changed: DefaultValue, NotEditable, IsUniqueForThisType, IsUniqueForAllTypes.

The LockList parameter cannot be set to 'true' if a property does not have any list values.

4.68.4 Examples

The following example shows how to update the node type property using the CatalogNodeTypePropertyUpdate method.

```
try
{
    // Get the node type property object.
    NodeTypeProperty nodeTypeProperty =
        api.CatalogNodeTypePropertyGet(28000000022144);

    // Update node type parameters.
    nodeTypeProperty.Name = "Charm factor";
    nodeTypeProperty.Angle = 20;
    nodeTypeProperty.Bold = true;
    nodeTypeProperty.DefaultValue = "Default";
```

```

nodeTypeProperty.Displayed = true;
nodeTypeProperty.FillColor = "#123123";
nodeTypeProperty.FontColor = "#321321";
nodeTypeProperty.FontFamily = FontFamilies.LucidaConsole;
nodeTypeProperty.FontSize = 12;
nodeTypeProperty.IsInProperties = true;
nodeTypeProperty.IsUniqueForAllTypes = false;
nodeTypeProperty.IsUniqueForThisType = false;
nodeTypeProperty.Italic = false;
nodeTypeProperty.Justification = TextJustification.Center;
nodeTypeProperty.LockList = false;
nodeTypeProperty.OffsetX = 0;
nodeTypeProperty.OffsetY = 0;
nodeTypeProperty.Position = 3;
nodeTypeProperty.TextAlign = TextAligns.Center;
nodeTypeProperty.Underline = false;

// Update the node type.
api.CatalogNodeTypePropertyUpdate(nodeTypeProperty);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot update the node type: {0}", info.Detail.Details)
    );
}

```

4.68.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.69 CatalogNodeTypeUpdate Method

This method updates the node type in the catalog.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.69.1 Syntax

C#

```
void CatalogNodeTypeUpdate (
    NodeType nodeType
)
```

4.69.1.1 Parameters

nodeType

Type: [NetTerrain.WebApi.NodeType](#)

Node type object with updated data.

4.69.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.69.3 Remarks

To update the node type get the node type object, change one or more necessary parameters and then run the update method for this object. The Id parameter should not be changed.

System node types cannot be updated. The IsSystem parameter cannot be altered either.

The type group of the node type cannot be changed.

When altering the Name parameter (renaming the node type) the new name must be unique.

When changing the ImageFileName or Backgroung parameters the image file corresponding to the new file name should already exist on the server. For uploading new image files the [CatalogNodeTypeUploadImage\(FileUploadAttributes\)](#) or [CatalogNodeTypeUploadBackground\(FileUploadAttributes\)](#) methods should be used. Use an empty string to remove the node icon or background image.

A favorite node type or a node type with existing node instances cannot be disabled.

The Background, VendorId, Width and Height parameters can only be set for node types that were modelled as Racks, Devices and Cards.

The HBLLabelId (Hierarchy browser label) only accepts the property Id of properties belonging to the current node type.

The new TemplateId should correspond to a template node.

The CategoryId should correspond to a node category of the same type group.

The Display Rack Lines can only be set to true for the Rack type group.

4.69.4 Examples

The following example shows how to update the node type using CatalogNodeTypeUpdate method.

```
try
{
    // Get node type object.
    NodeType.nodeType = api.CatalogNodeTypeGetByName("Antenna");

    // Update node type parameters.
    nodeType.Name = "Antennas";
    nodeType.DefaultHeight = 0.23f;
    nodeType.DefaultWidth = 0.45f;
    nodeType.Description = "Arrays et. el..";
    nodeType.IsEnabled = true;
    nodeType.IsFavorite = true;
    nodeType.KeepAspectRatio = false;
    nodeType.HBLLabelId = 28000000022113;
    nodeType.DisplayRackLines = false;
    nodeType.DoubleClickBehavior = DoubleClickBehaviors.OpenURL;
    nodeType.DoubleClickBehaviorAttribute = "http://
www.katzenjammer.no";
    nodeType.ImageFileName = "BigAntenna.png";
    nodeType.Background = "Wilde.png";
    nodeType.CategoryId = 3100000000051;
    nodeType.TemplateId = 24000000000231;
    nodeType.VendorId = 8;
    nodeType.Width = 19f;
    nodeType.Height = 1.75f;

    // Update the node type.
    api.CatalogNodeTypeUpdate(nodeType);
}
catch (FaultException<FaultInfo> info)
```

```
{  
    Console.WriteLine(string.Format(  
        "Cannot update the node type: {0}", info.Detail.Details)  
    );  
}
```

4.69.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.70 CatalogNodeTypeUploadBackground Method

This method uploads a new background for an existing node type.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.70.1 Syntax

C#

```
void CatalogNodeTypeUploadBackground(  
    FileUploadAttributes fileUploadAttributes  
)
```

4.70.1.1 Parameters

fileUploadAttributes

Type: [NetTerrain.WebApi.FileUploadAttributes](#)

Attributes of a new node type background.

4.70.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.70.3 Remarks

Images can only be uploaded for non-system node types belonging to Device, Rack or Card node type groups.

4.70.4 Examples

The following example shows how to upload an image using the CatalogNodeTypeUploadBackground method.

```
try
{
    // Get node type.
    NodeType deviceTypeToUpdate = api.CatalogNodeTypeGetByName("ATM
Switches");
    FileStream stream = new FileStream(
        @"c:\ATM.png", FileMode.Open, FileAccess.Read);
    api.CatalogNodeTypeUploadBackground(new FileUploadAttributes()
    {
        FileName = "ATM.png",
        FileByteStream = stream, ObjectId = deviceTypeToUpdate.Id
    });

    // Release the stream.
    stream.Dispose();
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot upload node type background: {0}", info.Detail.Details)
);
}
```

4.70.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.71 CatalogNodeTypeUploadImage Method

This method uploads a new image for an existing node type.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.71.1 Syntax

C#

```
void CatalogNodeTypeUploadImage (
    FileUploadAttributes fileUploadAttributes
)
```

4.71.1.1 Parameters

fileUploadAttributes

Type: [NetTerrain.WebApi.FileUploadAttributes](#)

Attributes of the new node type image.

4.71.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.71.3 Remarks

An image can only be uploaded for non-system node types.

4.71.4 Examples

The following example shows how to upload an image using the CatalogNodeTypeUploadImage method.

```
try
{
    // Get node type.
    NodeType.nodeTypeToUpdate = api.CatalogNodeTypeGetByName("PDUs");
```

```

FileStream stream = new FileStream(
    @"c:\PDU.png", FileMode.Open, FileAccess.Read);
api.CatalogNodeTypeUploadImage(new FileUploadAttributes() {
    FileName = "PDU.png",
    FileByteStream = stream, ObjectId =.nodeTypeToUpdate.Id });

// Release the stream.
stream.Dispose();
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot upload node type image: {0}", info.Detail.Details));
}
}

```

4.71.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.72 CatalogVendorAdd Method

This method adds a new vendor.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.72.1 Syntax

C#

```

long CatalogVendorAdd(
    string vendorName
)

```

4.72.1.1 Parameters

vendorName

Type: System.String

Vendor name. This name must be unique throughout the vendors catalog.

4.72.1.2 Return Value

Type: Int64 Returns the id of the newly created vendor.

4.72.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.72.3 Examples

The following example shows how to add a new vendor using the CatalogVendorAdd method.

```
try
{
    long vendorId = api.CatalogVendorAdd("Acme");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot add vendor: {0}", info.Detail.Details));
}
```

4.72.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.73 CatalogVendorDelete Method

This method deletes a vendor.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.73.1 Syntax

C#

```
void CatalogVendorDelete(  
    long vendorId  
)
```

4.73.1.1 Parameters

vendorId

Type: System.Int64

The id of the vendor to delete.

4.73.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.73.3 Remarks

Vendors in use cannot be deleted.

4.73.4 Examples

The following example shows how to delete a vendor using the CatalogVendorDelete method.

```
try  
{  
    // Get existing vendor.  
    Vendor vendor = api.CatalogVendorGetByName ("Acme");
```

```
// Delete the vendor.  
api.CatalogVendorDelete(vendor.Id);  
}  
catch (FaultException<FaultInfo> info)  
{  
    Console.WriteLine(string.Format(  
        "Cannot delete vendor: {0}", info.Detail.Details)  
    );  
}
```

4.73.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.74 CatalogVendorGet Method

This method gets a vendor object.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.74.1 Syntax

C#

```
Vendor CatalogVendorGet(  
    long vendorId  
)
```

4.74.1.1 Parameters

vendorId

Type: System.Int64

Vendor id.

4.74.1.2 Return Value

Type: [Vendor](#) Returns the vendor object.

4.74.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.74.3 Remarks

Unlike other objects, vendor ids start from 1.

4.74.4 Examples

The following example shows how to get a vendor using the CatalogVendorGet method.

```
try
{
    Vendor vendor = api.CatalogVendorGet(3);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get vendor: {0}", info.Detail.Details));
}
```

4.74.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.75 CatalogVendorGetByName Method

This method gets a vendor object by name.

4.75.1 Syntax

C#

```
Vendor CatalogVendorGetByName (
    string vendorName
)
```

4.75.1.1 Parameters

vendorName

Type: System.String

Vendor name.

4.75.1.2 Return Value

Type: [Vendor](#) Returns the vendor object.

4.75.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.75.3 Examples

The following example shows how to get a vendor object using the CatalogVendorGetByName method.

```
try
{
    Vendor vendor = api.CatalogVendorGetByName("Acme");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get vendor: {0}", info.Detail.Details))
```

```
) ;  
}
```

4.75.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.76 CatalogVendorUpdate Method

This method updates a vendor.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.76.1 Syntax

C#

```
void CatalogVendorUpdate(  
    Vendor vendor  
)
```

4.76.1.1 Parameters

vendor

Type: [NetTerrain.WebApi.Vendor](#)

Vendor object with updated data.

4.76.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.76.3 Remarks

To update a vendor object, first retrieve the object, then change one or more parameters and then run the update method. The Id parameter should not be changed. Currently vendors only have one property, which is the name.

When altering the Name parameter (renaming the vendor) the new name must be unique in the catalog of vendors.

4.76.4 Examples

The following example shows how to update the vendor using the CatalogVendorUpdate method.

```
try
{
    // Get vendor object.
    Vendor vendor = api.CatalogVendorGetByName("Acme");

    // Update vendor parameters.
    vendor.Name = "BeepBeep";

    // Update the vendor.
    api.CatalogVendorUpdate(vendor);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot update the vendor: {0}", info.Detail.Details));
}
```

4.76.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.77 DiagramGetHeight Method

This method gets the height of a diagram.

4.77.1 Syntax

C#

```
float DiagramGetHeight(
    long diagramId
)
```

4.77.1.1 Parameters

diagramId

Type: System.Int64

Diagram id.

4.77.1.2 Return Value

Type: Single Returns the diagram height values in 'points' (one point equals 0.01 inches).

4.77.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.77.3 Examples

The following example shows how to retrieve the height of the specified diagram id using the DiagramGetHeight method.

```
try
{
    float height = api.DiagramGetHeight(24000000018239);
    Console.WriteLine("Value = " + height);
}
catch (FaultException<FaultInfo> info)
{
```

```
        Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
// The example could return something like this:
// Value = 850
```

4.77.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.78 DiagramGetLinksByTypeId Method

This method gets a list of link names providing the type and the diagram.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.78.1 Syntax

C#

```
Dictionary<long, string> DiagramGetLinksByTypeId(
    long diagramId,
    long linkTypeId,
    bool includeSubDiagrams
)
```

4.78.1.1 Parameters

diagramId

Type: System.Int64

Diagram id.

linkTypeId

Type: System.Int64

Link type id.

includeSubDiagrams

Type: System.Boolean

If set to true links are also searched in any child diagrams.

4.78.1.2 Return Value

Type: Dictionary(Int64, String) Returns a dictionary containing 'link id' - 'link name' pairs or an empty dictionary if no links were found.

4.78.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.78.3 Examples

The following example shows how to retrieve all the link names of the specified diagram id and type id using the DiagramGetLinksWithNamesByTypeId method.

```
try
{
    Dictionary<long, string> list = api.DiagramGetLinksByTypeId(
        24000000018239, 27000000000033, false);
    foreach (KeyValuePair<long, string> entry in list)  {
        Console.WriteLine(string.Format(
            "Property id: {0}, name: {1}", entry.Key, entry.Value));
    }
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get a list of links: {0}", info.Detail.Details));
}
// The example retrieves an output such as the following:
// Link id: 2500000006219, name: Link1
// Link id: 2500000006220, name: Link2
// Link id: 2500000006223, name: Ali G
```

```
// Link id: 25000000006224, name: Me Julie  
// Link id: 25000000007902, name: BooyahShakkah
```

4.78.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.79 DiagramGetMarginSize Method

This method gets the margin size of a diagram.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.79.1 Syntax

C#

```
float DiagramGetMarginSize(  
    long diagramId  
)
```

4.79.1.1 Parameters

diagramId

Type: System.Int64

Diagram id.

4.79.1.2 Return Value

Type: Single Returns the diagram margin size value in 'points' (one point equals 0.01 inches).

4.79.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.79.3 Examples

The following example shows how to get the margin size of the specified diagram using the DiagramGetMarginSize method.

```
try
{
    float margin = api.DiagramGetMarginSize(24000000018239);
    Console.WriteLine("Value = " + margin);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
// Output:
// Value = 50
```

4.79.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.80 DiagramGetNodesByTypeGroup Method

This method gets a dictionary of node ids and names providing the type group and the diagram.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.80.1 Syntax

C#

```
Dictionary<long, string> DiagramGetNodesByTypeGroup (
    long diagramId,
    NodeTypeGroups typeGroup,
    HierarchySearchModes searchMode,
    int searchDepth
)
```

4.80.1.1 Parameters

diagramId

Type: System.Int64

Diagram id.

typeGroup

Type: [NetTerrain.WebApi.NodeTypeGroups](#)

Node type group value of [NodeTypeGroups](#) enumeration.

searchMode

Type: [NetTerrain.WebApi.HierarchySearchModes](#)

Nodes search mode value of [HierarchySearchModes](#) enumeration.

searchDepth

Type: System.Int32

Number of hierarchy levels for nodes searching if searchMode is set to N_Levels.

4.80.1.2 Return Value

Type: [Dictionary\(Int64, String\)](#) Returns a dictionary containing 'node id' - 'node name' pairs or an empty dictionary if no nodes were found.

4.80.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.80.3 Examples

The following example shows how to retrieve all the nodes of the specified diagram id and type id using the [DiagramGetNodesByTypeGroup](#) method.

```
try
{
    Dictionary<long, string> list = api.DiagramGetNodesByTypeGroup(
24000000018239, NodeTypeGroups.Device,
HierarchySearchDepth.N_Levels, 3);
    foreach (KeyValuePair<long, string> entry in list)  {
```

```
        Console.WriteLine(string.Format("Device id: {0}, name: {1}",  
entry.Key, entry.Value));  
    }  
}  
catch (FaultException<FaultInfo> info)  
{  
    Console.WriteLine(string.Format("Cannot get a list of nodes: {0}",  
info.Detail.Details)  
);  
}  
// The example retrieves something like the following foo:  
// Device id: 24000000018447, name: Switch 1  
// Device id: 24000000018454, name: Switch 2
```

4.80.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.81 DiagramGetNodesByTypeId Method

Gets a list of nodes of a selected type on a selected diagram.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.81.1 Syntax

C#

```
Dictionary<long, string> DiagramGetNodesByTypeId(  
    long diagramId,  
    long nodeTypeId,  
    HierarchySearchModes searchMode,  
    int searchDepth  
)
```

4.81.1.1 Parameters

diagramId

Type: System.Int64

Diagram id.

nodeTypeld

Type: System.Int64

Node type id.

searchMode

Type: [NetTerrain.WebApi.HierarchySearchModes](#)

Nodes search mode value of [HierarchySearchModes](#) enumeration.

searchDepth

Type: System.Int32

Number of hierarchy levels for nodes searching if searchMode is set to N_Levels.

4.81.1.2 Return Value

Type: [Dictionary\(Int64, String\)](#) Returns a dictionary containing 'node id' - 'node name' pairs or an empty dictionary if no nodes were found.

4.81.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.81.3 Examples

The following example shows how to retrieve all the nodes of the specified diagram id and type id using the DiagramGetNodesByTypeld method.

```
try
{
    Dictionary<long, string> list = api.DiagramGetNodesByTypeId(
        24000000018239, 27000000000033, HierarchySearchDepth.N_Levels, 2);
```

```

foreach (KeyValuePair<long, string> entry in list) {
    Console.WriteLine(string.Format("Node id: {0}, name: {1}",
entry.Key, entry.Value));
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Cannot get a list of nodes: {0}",
info.Detail.Details));
}
// The example retrieves something like the following foo:
// Node id: 24000000018443, name: Workstation 1
// Node id: 24000000018444, name: Workstation 2

```

4.81.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.82 DiagramGetWidth Method

This method gets the width of a diagram.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.82.1 Syntax

C#

```

float DiagramGetWidth(
    long diagramId
)

```

4.82.1.1 Parameters

diagramId

Type: System.Int64

Diagram id.

4.82.1.2 Return Value

Type: Single Returns the diagram width value in 'points' (one point equals 0.01 inches).

4.82.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.82.3 Examples

The following example shows how to retrieve the width of the specified diagram id using the DiagramGetWidth method.

```
try
{
    float width = api.DiagramGetWidth(24000000018239);
    Console.WriteLine("Value = " + width);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.82.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.83 InstanceMoveToFront Method

This method moves an instance on a diagram to the front.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.83.1 Syntax

C#

```
void InstanceMoveToFront(  
    long diagramId,  
    long instanceId  
)
```

4.83.1.1 Parameters

diagramId

Type: System.Int64

Diagram id.

instanceId

Type: System.Int64

Instance Id. Should correspond to a Node, Link or FreeText id.

4.83.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.83.3 Remarks

In netTerrain terms, an instance is any selectable object rendered on a diagram, such as a node, a link or a free text. This method will move an instance to the front if it is a Node, a Link or a FreeText object and it will calculate the so-called zOrder of that instance as the maximum existing zOrder of any other objects on that diagram, plus 1.

4.83.4 Examples

The following example shows how to move the specified instance to the front of the diagram (on top of other objects) using the InstanceMoveToFront method.

```
try
{
    api.InstanceMoveToFront(24000000014087, 24000000031942);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
        info.Detail.Details));
}
```

4.84 InstanceSendToBack Method

This method sends an instance on a diagram to the back.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.84.1 Syntax

C#

```
void InstanceSendToBack(
    long diagramId,
    long instanceId
)
```

4.84.1.1 Parameters

diagramId

Type: System.Int64

Diagram id.

instanceId

Type: System.Int64

Instance Id. Should correspond to a Node, Link or FreeText id.

4.84.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.84.3 Remarks

In netTerrain terms, an instance is any selectable object rendered on a diagram, such as a node, a link or a free text. This method will send an instance to the back if it is a Node, a Link or a FreeText object and it will calculate the so-called zOrder of that instance as the minimum existing zOrder of any other objects on that diagram, minus 1.

4.84.4 Examples

The following example shows how to send the specified instance to the back of the diagram (behind other objects) using the InstanceSendToBack method.

```
try
{
    api.InstanceSendToBack(2400000014087, 2400000031942);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.85 LinkDelete Method

This method deletes a link.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.85.1 Syntax

C#

```
void LinkDelete(
    long linkId
)
```

4.85.1.1 Parameters

linkId

Type: System.Int64

Link id.

4.85.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.85.3 Examples

The following example shows how to delete the specified link using the LinkDelete method.

```
try
{
    api.LinkDelete(25000000019835);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
        info.Detail.Details));
}
```

4.85.4 See Also

[INetTerrainWebApi Interface](#)

4.86 LinkGetPropertyValue Method

This method gets the value of a link property.

Namespace: NetTerrain.WebApi Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.86.1 Syntax

C#

```
string LinkGetPropertyValue(
    long linkId,
    long linkPropertyId
)
```

4.86.1.1 Parameters

linkId

Type: System.Int64

Link id.

linkPropertyId

Type: System.Int64

Link property id in the catalog.

4.86.1.2 Return Value

Type: String Returns the value of the specified property.

4.86.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.86.3 Examples

The following example shows how to get the value of the specified property and link using the LinkGetPropertyValue method.

```
try
{
    string value = api.LinkGetPropertyValue(25000000019835,
2900000000055);
    Console.WriteLine("Value = " + value);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.87 LinkGetPropertyValueByName Method

This method gets the value of a link property passing the property name.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.87.1 Syntax

C#

```
string LinkGetPropertyValueByName (
    long linkId,
    string linkPropertyName
)
```

4.87.1.1 Parameters

linkId

Type: System.Int64

Link id.

linkPropertyName

Type: System.String

Link property name in the catalog.

4.87.1.2 Return Value

Type: String Returns the value of the specified property.

4.87.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.87.3 Examples

The following example shows how to get the value of the specified property (by name) and link using the LinkGetPropertyByName method.

```
try
{
    string value = api.LinkGetPropertyByName(25000000019835, "A
port");
    Console.WriteLine("Value = " + value);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.88 LinkGetTypeId Method

This method gets the type id of a link.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.88.1 Syntax

C#

```
long LinkGetTypeId(  
    long linkId  
)
```

4.88.1.1 Parameters

linkId

Type: System.Int64

Link id.

4.88.1.2 Return Value

Type: **Int64** Returns the link type id of a specified link.

4.88.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.88.3 Examples

The following example shows how to get the type id of the specified link using the `LinkGetTypeId` method.

```
try  
{  
    long typeId = api.LinkGetTypeId(25000000019834);  
    Console.WriteLine("Type id = " + typeId);  
}  
catch (FaultException<FaultInfo> info)  
{  
    Console.WriteLine(string.Format("Error: {0}",  
        info.Detail.Details));  
}
```

4.88.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.89 LinkInsert Method

This method inserts a link with a specific name and of a specific type providing the end nodes.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.89.1 Syntax

C#

```
long LinkInsert(  
    string name,  
    long typeId,  
    long node1Id,  
    long node2Id  
)
```

4.89.1.1 Parameters

name

Type: System.String

Name of the new link.

typeId

Type: System.Int64

Type id of the new link.

node1Id

Type: System.Int64

Id of the starting node.

node2Id

Type: System.Int64

Id of the ending node.

4.89.1.2 Return Value

Type: **Int64** Returns the id of the inserted link.

4.89.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.89.3 Remarks

In netTerrain, the endpoints of a link can be on two different diagrams. In this case an inter diagram link will be created automatically.

4.89.4 Examples

The following example shows how to insert a link using the LinkInsert method.

```
try
{
    long linkId = api.LinkInsert( "My New Link", 27000000000124,
24000000031830, 24000000031827);
    Console.WriteLine("LinkId = " + linkId);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.89.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.90 LinkPropertyUpdate Method

This method updates a link property.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.90.1 Syntax

C#

```
void LinkPropertyUpdate(
    long linkId,
    long propertyId,
    string value
)
```

4.90.1.1 Parameters

linkId

Type: System.Int64

Id of the link that needs to be updated.

propertyId

Type: System.Int64 Id of the property to be updated.

value

Type: System.String

4.90.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.90.3 Examples

The following example shows how to update the value of the specified property and link using the LinkPropertyUpdate method.

```
try
{
    // 25000000020940 - Link Id - instance of type "Pet".
    // 29000000000555 - "Sound" property id.
    api.LinkPropertyUpdate(25000000020940, 29000000000555, "Gobble
gobble");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.91 LinkTypeGetId Method

This method gets the id of the link type providing its name.

Namespace: NetTerrain.WebApi Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.91.1 Syntax

C#

```
long LinkTypeGetId(
    string linkTypeName
)
```

4.91.1.1 Parameters

linkTypeName

Type: System.String

Link type name.

4.91.1.2 Return Value

Type: **Int64** Returns the link type id.

4.91.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.91.3 Examples

The following example shows how to get the Id of the specified link type (by name) using the LinkTypeGetId method.

```
try
{
    long linkTypeId = api.LinkTypeGetId("Big huge circuit");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format(
        "Cannot get link type id: {0}", info.Detail.Details));
}
```

4.91.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.92 NodeDelete Method

This method deletes a node.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.92.1 Syntax

C#

```
void NodeDelete(  
    long nodeId  
)
```

4.92.1.1 Parameters

nodeId

Type: System.Int64

Node id.

4.92.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.92.3 Examples

The following example shows how to delete the specified node using the NodeDelete method.

```
try  
{  
    api.NodeDelete(2400000031827);  
}  
catch (FaultException<FaultInfo> info)  
{  
    Console.WriteLine(string.Format("Error: {0}",  
        info.Detail.Details));  
}
```

4.92.4 See Also

[INetTerrainWebApi Interface](#)

4.93 NodeGetPropertyValue Method

This method gets the value of a node property.

Namespace: NetTerrain.WebApi Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.93.1 Syntax

C#

```
string NodeGetPropertyValue(  
    long nodeId,  
    long nodePropertyId  
)
```

4.93.1.1 Parameters

nodeId

Type: System.Int64

Node id.

nodePropertyId

Type: System.Int64

Node property id in the catalog.

4.93.1.2 Return Value

Type: String Returns the value of the specified property.

4.93.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.93.3 Examples

The following example shows how to get the value of the specified property and node using the NodeGetPropertyValue method.

```
try
{
    string value = api.NodeGetPropertyValue(24000000029203,
28000000019353);
    Console.WriteLine("Value = " + value);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.94 NodeGetPropertyValueByName Method

This method gets the value of a node property by passing the property name.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.94.1 Syntax

C#

```
string NodeGetPropertyValueByName (
    long nodeId,
    string nodePropertyName
)
```

4.94.1.1 Parameters

nodeId

Type: System.Int64

Node id.

nodePropertyName

Type: System.String

Node property name (as defined in the catalog).

4.94.1.2 Return Value

Type: String Returns the value of the selected property.

4.94.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.94.3 Examples

The following example shows how to get the value of the specified property (by name) and node using the `NodeGetPropertyByName` method.

```
try
{
    string value = api.NodeGetPropertyByName(24000000029203,
"Depth");
    Console.WriteLine("Value = " + value);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.95 NodeGetTypeGroup Method

This method gets the type group of a node.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.95.1 Syntax

C#

```
NodeTypeGroups NodeGetTypeGroup (
    long nodeId
)
```

4.95.1.1 Parameters

nodeId

Type: System.Int64

Node id.

4.95.1.2 Return Value

Type: [NodeTypeGroups](#) Returns the enumeration value of the [NodeTypeGroups](#) enumeration that corresponds to the specified node.

4.95.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.95.3 Examples

The following example shows how to get the type group of specified node using the [NodeGetTypeGroup](#) method.

```
try
{
    NodeTypeGroups typeGroup = api.NodeGetTypeGroup(24000000029203);
    Console.WriteLine("Node type group = " + typeGroup);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
```

```
    info.Detail.Details) ;  
}
```

4.95.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.96 NodeGetTypeId Method

This method gets the type id of a node.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.96.1 Syntax

C#

```
long NodeGetTypeId(  
    long nodeId  
)
```

4.96.1.1 Parameters

nodeId

Type: System.Int64

Node id.

4.96.1.2 Return Value

Type: **Int64** Returns the id of the node type that corresponds to the specified node.

4.96.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.96.3 Examples

The following example shows how to get the Typeld of specified node using the NodeGetTypeld method.

```
try
{
    long typeId = api.NodeGetTypeId(24000000029203);
    Console.WriteLine("Type id = " + typeId);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.96.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.97 NodeInsert Method

This method inserts a node with a specific name and of a specific type providing the parent diagram.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.97.1 Syntax

C#

```
long NodeInsert(
    string name,
    long parentId,
    long typeId
)
```

4.97.1.1 Parameters

name

Type: System.String

Name of the inserted node.

parentId

Type: System.Int64

Id of the parent diagram where we will insert the node.

typeId

Type: System.Int64

Type id of the inserted node.

4.97.1.2 Return Value

Type: Int64 Returns the id of the inserted node.

4.97.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.97.3 Examples

The following example shows how to insert a node on a diagram using the NodeInsert method.

```
try
{
    long nodeId = api.NodeInsert( "DataCenter2", 24000000014087,
26000000003700);
    Console.WriteLine("NodeId = " + nodeId);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.97.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.98 NodePropertyUpdate Method

This method updates a node property.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.98.1 Syntax

C#

```
void NodePropertyUpdate(
    long nodeId,
    long propertyId,
    string value
)
```

4.98.1.1 Parameters

nodeId

Type: System.Int64

Id of the node to be updated.

propertyId

Type: System.Int64

Id of property to be updated.

value

Type: System.String

New property value.

4.98.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.98.3 Examples

The following example shows how to update the value of a given property and node using the NodePropertyUpdate method.

```
try
{
    // 24000000030435 - Node Id - instance of type "Animal".
    // 28000000034803 - Id of the property "Kind".
    api.NodePropertyUpdate(24000000030435, 28000000034803,
    "Cucaracha");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
    info.Detail.Details));
}
```

4.99 NodeReparent Method

This method moves a node to another diagram.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.99.1 Syntax

C#

```
void NodeReparent(
    long nodeId,
    long newParentId
)
```

4.99.1.1 Parameters

nodeId

Type: System.Int64

Id of the node to be moved.

newParentId

Type: System.Int64

The id of the new parent diagram.

4.99.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.99.3 Examples

The following example shows how to reparent a node (i.e. change its ancestry) by using the NodeReparent method.

```
try
{
    api.NodeReparent(24000000014087, 24000000012754);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.99.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.100 NodeSetCanMove Method

This method updates the 'CanMove' setting of a visNode based on the node id and diagram id.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.100.1 Syntax

C#

```
void NodeSetCanMove (
    long diagramId,
    long nodeId,
    bool canMove
)
```

4.100.1.1 Parameters

diagramId

Type: System.Int64

Id of the diagram containing the node.

nodeId

Type: System.Int64

Id of the node.

canMove

Type: System.Boolean

New value of the 'CanMove' setting.

4.100.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.100.3 Remarks

The 'CanMove' flag is one of several parameters associated with a visNode.

4.100.4 Examples

The following example shows how override the CanMove flag for a specified node using the NodeSetCanMove method.

```
try
{
    api.NodeSetCanMove(24000000014087, 24000000030435, false);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.101 NodeSetHeight Method

This method sets the height of a visNode based on the node id and diagram id.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.101.1 Syntax

C#

```
void NodeSetHeight(
    long diagramId,
    long nodeId,
    float height
)
```

4.101.1.1 Parameters

diagramId

Type: System.Int64

Id of the diagram containing the node.

nodeId

Type: System.Int64

Id of the node.

height

Type: System.Single

New height value in 'points' (one point equals 0.01 inches).

4.101.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.101.3 Remarks

The 'Height' parameter is one of several parameters associated with a visNode.

4.101.4 Examples

The following example shows how override the CanMove flag for a specified node using the NodeSetCanMove method.

```
try
{
    // 120 diagram points equals 1.2 inches.
    api.NodeSetHeight(24000000014087, 24000000030435, 120);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.102 NodeSetWidth Method

This method sets the width of a visNode based on the node id and diagram id.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.102.1 Syntax

C#

```
void NodeSetWidth(  
    long diagramId,  
    long nodeId,  
    float width  
)
```

4.102.1.1 Parameters

diagramId

Type: System.Int64

Id of the diagram containing the node.

nodeId

Type: System.Int64

Id of the node.

width

Type: System.Single

New width value in 'points' (one point equals 0.01 inches).

4.102.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.102.3 Remarks

The 'Width' parameter is one of several parameters associated with a visNode.

4.102.4 Examples

```
try  
{  
    // 80 diagram points equals 0.8 inches.
```

```
        api.NodeSetWidth(24000000014087, 24000000030435, 80);
    }
    catch (FaultException<FaultInfo> info)
    {
        Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
    }
}
```

4.103 NodeSetX Method

This method sets the X coordinate of the top-left corner of a visNode based on the node id and diagram id.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.103.1 Syntax

C#

```
void NodeSetX(
    long diagramId,
    long nodeId,
    float x
)
```

4.103.1.1 Parameters

diagramId

Type: System.Int64

Id of the diagram containing the node.

nodeId

Type: System.Int64

Id of the node.

x

Type: System.Single

New X coordinate in 'points' (one point equals 0.01 inches).

4.103.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.103.3 Remarks

The 'X' coordinate is one of several parameters associated with a visNode.

4.103.4 Examples

The following example shows how to override the X coordinate of a node by using the NodeSetX method.

```
try
{
    // Set the node 0.2 inches to the right of the diagram left margin.
    api.NodeSetX(2400000014087, 2400000030435, 20);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
info.Detail.Details));
}
```

4.103.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.104 NodeSetY Method

This method sets the Y coordinate of the top-left corner of a visNode based on the node id and diagram id.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.104.1 Syntax

C#

```
void NodeSetY(  
    long diagramId,  
    long nodeId,  
    float y  
)
```

4.104.1.1 Parameters

diagramId

Type: System.Int64

Id of the diagram containing the node.

nodeId

Type: System.Int64

Id of the node.

y

Type: System.Single

New Y coordinate in 'points' (one point equals 0.01 inches).

4.104.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.104.3 Remarks

The 'Y' coordinate is one of several parameters associated with a visNode.

4.104.4 Examples

The following example shows how to override the Y coordinate of a node by using the NodeSetY method.

```
try
{
    // Set the node 0.2 inches below the diagram's top margin.
    api.NodeSetY(2400000014087, 2400000030435, 20);
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
        info.Detail.Details));
}
```

4.104.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.105 NodesGetByName Method

Gets a list of nodes with the specified name.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.105.1 Syntax

C#

```
List<long> NodesGetByName (
    string nodeName
)
```

4.105.1.1 Parameters

nodeName

Type: System.String

Node name.

4.105.1.2 Return Value

Type: List<Int64>

4.105.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.105.3 Remarks

The result is the list of node ids as a node name is not unique.

4.105.4 Examples

The following example shows how to get the list of node Ids using the NodesGetByName method.

```
try
{
    long[] nodeIds = api.NodesGetByName("My Node");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
        info.Detail.Details));
}
```

4.105.5 See Also

[INetTerrainWebApi Interface](#)

4.106 NodeTypeGetId Method

This method gets the id of the node type providing its name.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.106.1 Syntax

C#

```
long NodeTypeGetId(  
    string nodeTypeName  
)
```

4.106.1.1 Parameters

nodeTypeName

Type: System.String

Node type name.

4.106.1.2 Return Value

Type: [Int64](#) Returns the node type id.

4.106.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.106.3 Examples

The following example shows how to get the Id of the specified node type (by name) using the NodeTypeGetId method.

```
try
{
    long nodeId = api.NodeTypeGetId("My Node Type");
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Cannot get node type id: {0}",
info.Detail.Details));
}
```

4.106.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.107 TestConnection Method

This method tests the opened channel between the server and the client. This method does nothing unless a problem is detected, in which case it throws a FaultException(TDetail) error, including the problem description.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.107.1 Syntax

C#

```
void TestConnection()
```

4.107.2 Exceptions

Exception	Condition
[!FaultException]	Raised in case of a fault on method execution.

4.107.3 Examples

This example shows how to check the channel connection created between a client application and the netTerrain instance.

```
// Create connection.  
ChannelFactory<WebApiReference.INetTerrainWebApi> factory =  
CreateConnectionFactory(  
    @"https://myserver.com/netTerrain/WebApi/NetTerrainWebApi.svc",  
    "webApiUser", "webApiUserPassword");  
WebApiReference.INetTerrainWebApi api = factory.CreateChannel();  
try  
{  
    api.TestConnection();  
}  
catch (Exception ex)  
{  
    Console.WriteLine(string.Format("Connection failed: {0}",  
        ex.Message));  
}
```

4.107.4 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.108 VisNodeSetAttribute Method

This method updates a set of attributes of a visNode based on the node id and diagram id.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.108.1 Syntax

C#

```
void VisNodeSetAttribute(  
    long diagramId,  
    long nodeId,  
    Dictionary<string, string> attributes  
)
```

4.108.1.1 Parameters

diagramId

Type: System.Int64

Id of the diagram containing the node.

nodeId

Type: System.Int64

Id of the node.

attributes

Type: System.Collections.Generic.Dictionary(String, String)

A dictionary of 'attribute name' - 'new attribute value' pairs. Possible attribute names include: X, Y, Height, Width, CanMove. Attribute names are not case sensitive.

4.108.2 Exceptions

Exception	Condition
FaultException(TDetail)	Raised in case of a fault on method execution. Stores details in FaultInfo object.

4.108.3 Remarks

Attributes belong to a visNode - a visible representation of a node on a particular diagram. A particular visNode instance could be determined by ids of its base node and diagram it is placed on - a single node could have reference nodes on different diagrams, each of them will require its own visNode.

4.108.4 Examples

The following example shows how to set the attributes of a VisNode using the VisNodeSetAttribute method.

```
try
{
    api.VisNodeSetAttribute(24000000014087, 24000000030435,
        new Dictionary<string, string> {
            { "x", "20" },
            { "y", "20" },
            { "width", "80" },
            { "height", "120" },
            { "canMove", "false" }
        }
    );
}
catch (FaultException<FaultInfo> info)
{
    Console.WriteLine(string.Format("Error: {0}",
        info.Detail.Details));
}
```

4.108.5 See Also

[INetTerrainWebApi Interface](#)

[NetTerrain.WebApi Namespace](#)

4.109 InstanceEffects Enumeration

This enumeration type sets effects for an overriden instance.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.109.1 Syntax

C#

```
public enum InstanceEffects
```

4.109.2 Members

Member name	Value	Description
NoEffect	0	No Effect.
BlinkObject	1	Blink Object.
RectangleBlink	2	Rectangle Blink.
RedTriangleIndicator	3	Red Triangle Indicator.
OrangeTriangleIndicator	4	Orange Triangle Indicator.
GreenTriangleIndicator	5	Green Triangle Indicator.

4.109.3 See Also

[NetTerrain.WebApi Namespace](#)

4.110 LinkCategory Class

This class contains parameters of a link category.

4.110.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.LinkCategory

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.110.2 Syntax

C#

```
public class LinkCategory
```

The `LinkCategory` type exposes the following members.

4.110.3 Constructors

	Name	Description
	LinkCategory	

4.110.4 Fields

	Name	Description
	Id	Category id.
	ImageFileName	Image file name for a link category icon image.
	IsFavorite	If set to true makes the category a favorite.
	Name	Category name.
	ParentId	Parent category Id ('0' if there is no a parent category).

4.110.5 See Also

[NetTerrain.WebApi Namespace](#)

4.111 LinkOverride Class

This class contains parameters of a link property override.

4.111.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.LinkOverride

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.111.2 Syntax

C#

```
public class LinkOverride
```

The `LinkOverride` type exposes the following members.

4.111.3 Constructors

Name	Description
 <code>LinkOverride</code>	

4.111.4 Fields

Name	Description
 <code>Color</code>	Link's hex color code override (Example: '#000000').
 <code>EndArrow</code>	Override of an arrow style at link's end.
 <code>Id</code>	Link override id.
 <code>IsOverride</code>	When set to false does not set any override for this list value.
 <code>LinkStyle</code>	Link style override.
 <code>ListValue</code>	Override's list value.
 <code>PropertyId</code>	Corresponding link property id.
 <code>Rule</code>	Override rule.
 <code>StartArrow</code>	Override of an arrow style at link's start.
 <code>Thickness</code>	Link's thickness override.

4.111.5 See Also

[NetTerrain.WebApi Namespace](#)

4.112 LinkStyles Enumeration

This enumeration type sets styles of lines used to display links.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.112.1 Syntax

C#

```
public enum LinkStyles
```

4.112.2 Members

Member name	Value	Description
Solid	0	Solid line.
Dash	1	Dashed line.
DashDot	2	"Dash-Dot" line.
DashDotDot	3	"Dash-Dot-Dot" line.
Dot	4	Dotted line.

4.112.3 See Also

[NetTerrain.WebApi Namespace](#)

4.113 LinkType Class

This class represents a link type object.

4.113.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.LinkType

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.113.2 Syntax

C#

```
public class LinkType
```

The LinkType type exposes the following members.

4.113.3 Constructors

Name	Description
 LinkType	

4.113.4 Fields

Name	Description
 CategoryId	Link type category id ('0' if there is no any associated category).
 Color	Link's hex color code (Example: '#000000').
 EndArrow	End arrow style.
 Id	Link type id.
 IsEnabled	If set to true enables the type.
 IsFavorite	If set to true makes the type a favorite.
 IsMatchingPortConnectors	If set to true sets 'Matching Port Connectors' restriction on the type.
 IsSnappedToEdge	If set to true turns on 'Snapped To Edge' option.

	Name	Description
◆	IsSystem	If set to true indicates that the link type belongs to system types and cannot be altered or deleted.
◆	LinkStyle	Link style.
◆	Name	Link type name.
◆	StartArrow	Start arrow style.
◆	Thickness	Link thickness.

4.114 LinkTypeProperty Class

This class contains parameters of a link type property.

4.114.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.LinkTypeProperty

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.114.2 Syntax

C#

```
public class LinkTypeProperty
```

The LinkTypeProperty type exposes the following members.

4.114.3 Constructors

	Name	Description
◆	LinkTypeProperty	

4.114.4 Fields

Name	Description
Angle	Angle for property's text displaying (0..360).
Bold	If set to true makes displayed property text bold.
DefaultValue	Default value of the property.
Displayed	If set to true makes the property displayed on a diagram.
FillColor	Text background hex color code for a displayed property (Example: '#000000').
FontColor	Text font hex color code for a displayed property (Example: '#000000').
FontFamily	Font family for a displayed property.
FontSize	Text font size for a displayed property.
Id	Property id.
IsInProperties	If set to true the property is displayed in properties list when a link of this type is selected on a diagram.
IsSystem	If set to true indicates that the property belongs to system properties and cannot be deleted.
IsTypeField	If true indicates that this property is a reference to a host link type.
IsUniqueForAllTypes	If set to true makes a property unique for all link types.
IsUniqueForThisType	If set to true makes a property unique for this link type.
Italic	If set to true makes displayed property text italic.
Justification	Text justification mode relatively to the host link for a displayed property.
LinkTypeId	Link type id.
LockList	If set to true locks the list of values if the property has it.
Mandatory	If set to true makes the property mandatory.

	Name	Description
◆		
◆	Name	Property name.
◆	OffsetX	Text offset X for a displayed property.
◆	OffsetY	Text offset Y for a displayed property.
◆	Position	Property position number in a list of properties of this link type.
◆	TextAlign	Text alignment for a displayed property.
◆	Underline	If set to true makes displayed property text underlined.

4.114.5 See Also

[NetTerrain.WebApi Namespace](#)

4.115 NewNodeTypeInfo Class

This class combines parameters of a new node type in conjunction with the [CatalogAddNodeType\(NewNodeTypeInfo\)](#) method - an older version of the node type creation method for versions compatibility. It is advised to use the newer method [CatalogNodeTypeAdd\(String, NodeTypeGroups, String, Boolean\)](#).

4.115.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.NewNodeTypeInfo

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.115.2 Syntax

C#

```
public class NewNodeTypeInfo : IDisposable
```

The `NewNodeTypeInfo` type exposes the following members.

4.115.3 Constructors

	Name	Description
	NewNodeTypeInfo	

4.115.4 Methods

	Name	Description
	Dispose	Closes image byte stream if opened.

4.115.5 Fields

	Name	Description
	DefaultHeight	Default node height in inches.
	DefaultWidth	Default node width in inches.
	ImageByteStream	Byte stream for uploading the icon image file to the server.
	ImageFileName	Specifies the image file name for a node type icon image.
	IsEnabled	If set to true enables the type.
	IsFavourite	If set to true makes the type a favorite.
	Name	Node type name. Must be unique for all node types throughout the catalog.
	TypeGroupNumber	The type group number based on values of the NodeTypeGroups enumeration. Possible type groups include: Node, Device, Rack, Card.

4.116 NodeCategory Class

This class contains parameters of a node category.

4.116.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.NodeCategory

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.116.2 Syntax

C#

```
public class NodeCategory
```

The **NodeCategory** type exposes the following members.

4.116.3 Constructors

	Name	Description
	NodeCategory	

4.116.4 Fields

	Name	Description
	Id	Category id.
	ImageFileName	Image file name for a node category icon image.
	IsFavorite	If set to true makes the category a favorite.
	Name	Category name.
	ParentId	Parent category Id ('0' if there is no a parent category).
	TypeGroup	The type group of the category.

4.116.5 See Also

[NetTerrain.WebApi Namespace](#)

4.117 NodeOverride Class

This class contains parameters of a node property override.

4.117.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.NodeOverride

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.117.2 Syntax

C#

```
public class NodeOverride
```

The **NodeOverride** type exposes the following members.

4.117.3 Constructors

	Name	Description
	NodeOverride	

4.117.4 Fields

	Name	Description
	Id	Override id.
	ImageFileName	Overriding image file name.
	InstanceEffect	Instance effect if this list value is set as an override.
	IsOverride	When set to false does not set any override for this list value.
	ListValue	Override's list value.
	ParentEffect	Effect on instance's parent if this list value is set as an override.

	Name	Description
	PropertyId	Corresponding node property id.
	Rule	Override rule.
	UpwardsPropagation	Upwards propagation of an override effect if this list value is set as an override.

4.117.5 See Also

[NetTerrain.WebApi Namespace](#)

4.118 NodeType Class

This class represents a node type object.

4.118.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.NodeType

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.118.2 Syntax

C#

```
public class NodeType
```

The NodeType type exposes the following members.

4.118.3 Constructors

	Name	Description
	NodeType	

4.118.4 Fields

Name	Description
Background	Background image for modelled objects as Racks, Devices or Cards.
CategoryId	Node type category id ('0' if there is no any associated category).
DefaultHeight	Default node height in inches.
DefaultWidth	Default node width in inches.
Description	Node type description.
DisplayRackLines	If set to true displays rack lines on a rack diagram. Not used for other node type groups.
DoubleClickBehavior	Double click behavior for nodes of this node type.
DoubleClickBehaviorAttribute	Double click behavior attribute referenced by DoubleClickBehavior parameter: should contain diagram id for GoToDiagram option or URL for OpenURL option.
HBLabelId	Hierarchy browser label. Sets an id of this node type's property to be used as a label in the project's hierarchy tree (hierarchy browser).
Height	Physical height in inches for objects modeled as Racks, Devices or Cards.
Id	Node type id.
ImageFileName	Image file name for a node type icon image.
.IsEnabled	If set to true enables the type.
IsFavorite	If set to true makes the type a favorite.
IsSystem	If set to true indicates that the node type belongs to a system type and cannot be altered or deleted.
KeepAspectRatio	If set to true keeps a constant type image aspect ratio.
Name	Node type name.

Name	Description
Templated	Node type print template id ('0' if there is no associated template).
TypeGroup	The type group based on the NodeTypeGroups enumeration.
VendorId	Vendor id for modelled objects as Racks, Devices or Cards ('0' if there is no any associated vendor).
Width	Physical width in inches for objects modeled as Racks, Devices or Cards.

4.118.5 See Also

[NetTerrain.WebApi Namespace](#)

4.119 NodeTypeGroups Enumeration

This enumeration type describes groups of node types used in netTerrain.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.119.1 Syntax

C#

```
public enum NodeTypeGroups
```

4.119.2 Members

Member name	Value	Description
Undefined	0	
Node	1	Generic nodes.
Document	2	Documents.
Comment	3	Comments.
Stamp	4	Stamps.

Member name	Value	Description
Shape	5	Shape nodes.
Picture	6	Free drawings.
Device	7	Devices.
Rack	8	Racks.
Port	9	Ports.
Slot	10	Slots.
Card	11	Cards.
LineNode	12	Line nodes.

4.119.3 See Also

[NetTerrain.WebApi Namespace](#)

4.120 NodeTypeProperty Class

This class contains parameters of a node type property.

4.120.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.NodeTypeProperty

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.120.2 Syntax

C#

```
public class NodeTypeProperty
```

The `NodeTypeProperty` type exposes the following members.

4.120.3 Constructors

	Name	Description
	NodeTypeProperty	

4.120.4 Fields

	Name	Description
	Angle	Angle for a property displayed text (0..360).
	Bold	If set to true makes the displayed property text bold.
	DefaultValue	Default value of the property.
	Displayed	If set to true sets the property as displayed on a diagram.
	FillColor	Text background hex color code for a displayed property (Example: '#000000').
	FontColor	Text font hex color code for a displayed property (Example: '#000000').
	FontFamily	Font family for a displayed property.
	FontSize	Text font size for a displayed property.
	Id	Property id.
	IsInProperties	If set to true the property is shown in the properties list when a node of this type is selected on a diagram.
	IsSystem	If set to true indicates that the property belongs to system properties and cannot be deleted.
	IsTypeField	If true indicates that this property is a reference to a host node type.
	IsUniqueForAllTypes	If set to true makes a property unique for all node types.
	IsUniqueForThisType	If set to true makes a property unique for this node type.
	Italic	If set to true makes displayed property text italic.

Name	Description
Justification	Text justification mode for a displayed property.
LockList	If set to true locks the list of values if the property has it.
Mandatory	If set to true makes the property mandatory.
Name	Property name.
NodeTypeId	Node type id.
NotEditable	If set to true makes the property non-editable.
OffsetX	Text offset X for a displayed property.
OffsetY	Text offset Y for a displayed property.
Position	Property position number in a list of properties of this node type.
TextAlign	Text alignment for a displayed property.
Underline	If set to true makes displayed property text underlined.

4.120.5 See Also

[NetTerrain.WebApi Namespace](#)

4.121 OverrideRules Enumeration

This enumeration type sets override rules for node and link properties.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.121.1 Syntax

C#

```
public enum OverrideRules
```

4.121.2 Members

Member name	Value	Description
Equals	0	A property value is equal to an override value.
Contains	1	A property value contains an override value.
GreaterThan	2	A property value is greater than an override value.
LowerThan	3	A property value is lower than an override value.

4.121.3 See Also

[NetTerrain.WebApi Namespace](#)

4.122 Roles Enumeration

This enumeration type sets group roles.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.122.1 Syntax

C#

```
public enum Roles
```

4.122.2 Members

Member name	Value	Description
NoAccess	0	No access.
ReadOnly	1	Read Only.
DiagramReadOnly	2	Diagram Read Only.
Annotator	3	Annotator.
Updater	4	Updater.
Editor	5	Editor.

Member name	Value	Description
PowerUser	6	Power User.
Admin	7	Admin.

4.122.3 See Also

[NetTerrain.WebApi Namespace](#)

4.123 TextAligns Enumeration

This enumeration type sets horizontal alignment for multiline text within a field.

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.123.1 Syntax

C#

```
public enum TextAligns
```

4.123.2 Members

Member name	Value	Description
Left	0	Left.
Center	1	Center.
Right	2	Right.

4.123.3 See Also

[NetTerrain.WebApi Namespace](#)

4.124 TextJustification Enumeration

This enumeration type sets text field justification point.

4.124.1 Syntax

C#

```
public enum TextJustification
```

4.124.2 Members

Member name	Value	Description
TopLeft	0	Top Left corner of the text field.
Center	1	Center of the text field.

4.124.3 See Also

[NetTerrain.WebApi Namespace](#)

4.125 UpwardsPropagations Enumeration

This enumeration type sets upwards propagation of effects applied to an overriden instance.

4.125.1 Syntax

C#

```
public enum UpwardsPropagations
```

4.125.2 Members

Member name	Value	Description
NoPropagations	0	No Propagations.

Member name	Value	Description
ParentOnly	1	Parent Only.
ParentAndGrandparentOnly	2	Parent And Grandparent Only.
TopLevelOnly	3	Top Level Only.
AllLevels	4	All Levels.

4.125.3 See Also

[NetTerrain.WebApi Namespace](#)

4.126 User Class

This class contains parameters of a user.

4.126.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.User

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.126.2 Syntax

C#

```
public class User
```

The **User** type exposes the following members.

4.126.3 Constructors

	Name	Description
	User	

4.126.4 Fields

Name	Description
Comments	Additional comments.
Description	User description.
Email	User email address.
GroupId	User group id. Ignored for Active Directory users when IsOverrideAdGroup parameter is set to false.
Id	User id.
IsAdAccount	If set to true indicates that the user belongs to an Active Directory domain.
IsLocked	If set to true the user is locked.
IsOverrideAdGroup	If set to true the Active Directory user uses an overridden group instead of the group determined by its domain controller. In this case the user's group is determined by the GroupId parameter as for native (non-AD) users.
Name	User name.

4.126.5 See Also

[NetTerrain.WebApi Namespace](#)

4.127 Vendor Class

This class contains parameters of a vendor. Applicable for node types such as Racks, Devices or Cards.

4.127.1 Inheritance Hierarchy

System.Object → NetTerrain.WebApi.Vendor

Namespace: [NetTerrain.WebApi](#) Assembly: NetTerrain (in NetTerrain.dll) Version: 7.1.720

4.127.2 Syntax

C#

```
public class Vendor
```

The `Vendor` type exposes the following members.

4.127.3 Constructors

Name	Description
 Vendor	

4.127.4 Fields

Name	Description
 Id	Vendor id.
 Name	Vendor name.

4.127.5 See Also

[NetTerrain.WebApi Namespace](#)